


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:230.20V I:0.0142A P:2.0W PF:0.6118 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:230 x1 lm		
NAME:PDF with rated value 0019590114 LAMP 2W 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 1
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 115 lm/W			
MODEL		I _{max} (cd)	491.4	S/MH(C0/180)	0.45
NOMINAL POWER(W)	2	LOR(%)	100.0	S/MH(C90/270)	0.57
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	230	η UP,DN(C0-180)	0.6,58.3
NOMINAL FLUX(lm)	230	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.6,40.5
LAMPS INSIDE	1	η up (%)	1.1	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)		η down (%)	98.9	CIBSE SHR MAX	0.60

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

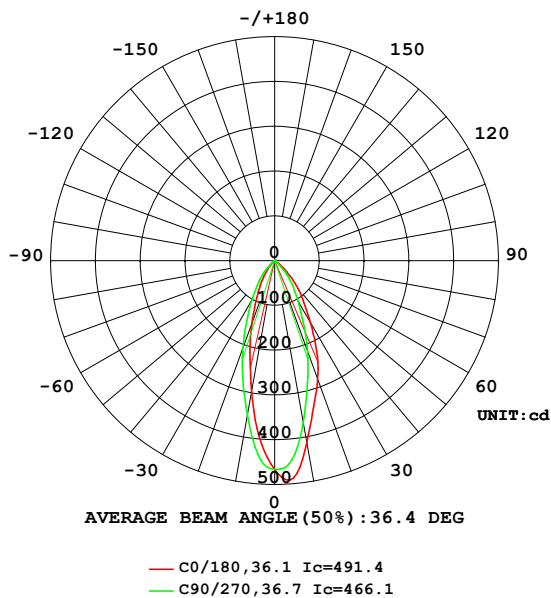

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

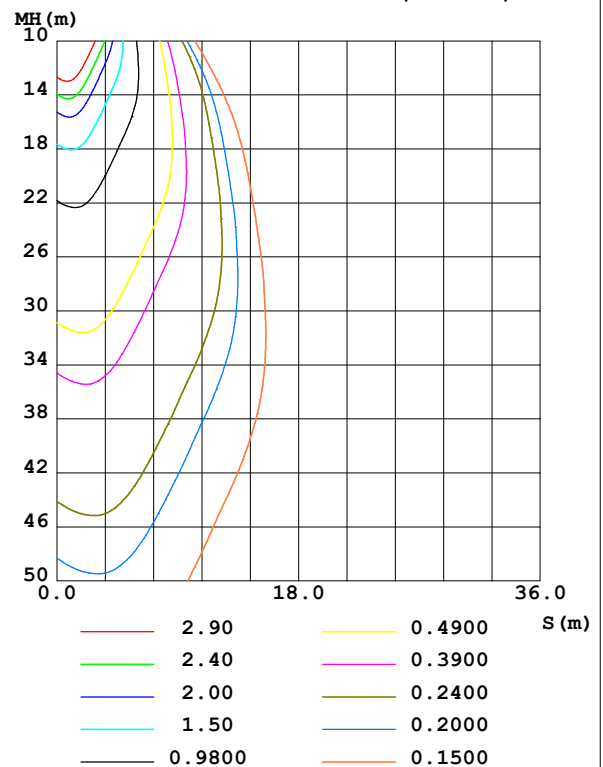

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25°C
Operators: YHX
Test Date:

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity: 55%
Test Distance: 1.160m [K=1.0000]
Remarks:

Checker: YHX

Assessor: ZQQ

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C90	C180	C270					γ	Φ zone	Φ total	%lum, lamp
10	413.5	368.2	297.6	350.2					0- 10	39.26	39.26	14.7,14.7
20	281.7	216.2	149.7	206.8					10- 20	77.31	116.6	43.5,43.5
30	161.4	104.5	66.31	102.8					20- 30	71.36	187.9	70.1,70.1
40	81.17	48.08	22.37	45.50					30- 40	47.03	235.0	87.7,87.7
50	23.65	6.773	4.899	8.343					40- 50	20.71	255.7	95.4,95.4
60	3.618	2.337	2.127	2.777					50- 60	4.894	260.6	97.3,97.3
70	1.899	1.573	1.327	1.644					60- 70	2.013	262.6	98,98
80	1.200	1.085	0.9204	0.9504					70- 80	1.392	264.0	98.5,98.5
90	0.7191	0.5931	0.5783	0.5516					80- 90	0.8881	264.9	98.9,98.9
100	0.5144	0.4926	0.4581	0.4657					90-100	0.5525	265.4	99.1,99.1
110	0.5710	0.5368	0.7347	0.4979					100-110	0.5768	266.0	99.3,99.3
120	0.5627	0.5852	0.5366	0.4815					110-120	0.5875	266.6	99.5,99.5
130	0.4229	0.4765	0.5222	0.3885					120-130	0.4267	267.0	99.7,99.7
140	0.3901	0.4404	0.4304	0.3823					130-140	0.3432	267.3	99.8,99.8
150	0.3673	0.4248	0.4230	0.4115					140-150	0.2520	267.6	99.9,99.9
160	0.3853	0.4955	0.4143	0.4082					150-160	0.1955	267.8	100,100
170	0.1616	0.3046	0.2190	0.2182					160-170	0.1053	267.9	100,100
180	0	0	0	0					170-180	0.0082	267.9	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 248.68 lm

%lum = 92.8%

%lamp = 92.8%

Conical surface Flux(120deg): 260.56 lm

%lum = 97.3%

%lamp = 97.3%

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25°C
Operators:YHX
Test Date:


Checker: YHX

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Assessor: ZQQ

LUMINANCE LIMITATION CURVES

Test:U:230.20V I:0.0142A P:2.0039W PF:0.6118 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:267.904x1 lm		
NAME: GU10-9D 2W 4000K 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 1
MFR.: KLITE	SUR.:	Shielding Angle:

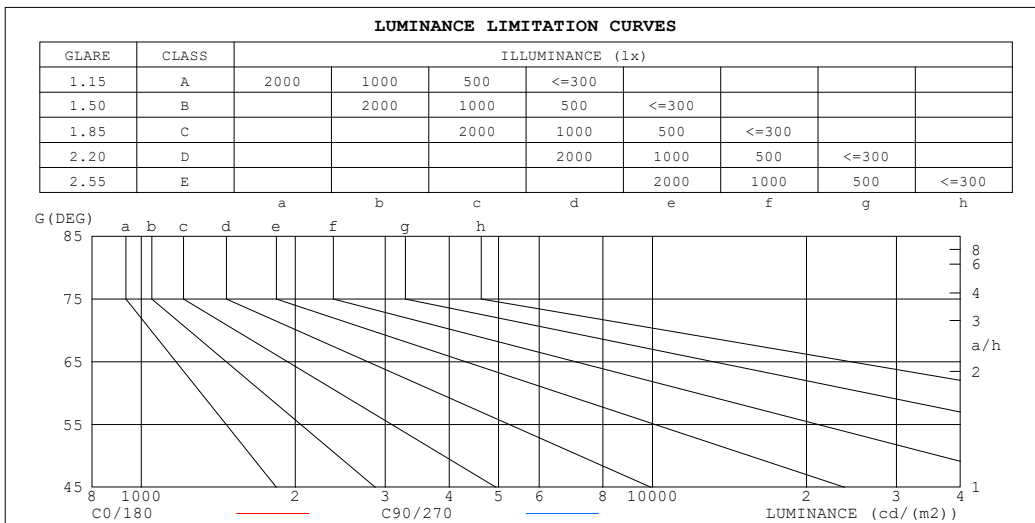

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	107	96
80	69	62
75	62	50
70	56	46
65	57	43
60	73	47
55	152	61
50	369	105
45	686	307

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25°C
Operators:YHX
Test Date:

Checker: YHX


γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Assessor: ZQQ

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.20V I:0.0142A P:2.0039W PF:0.6118 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:267.904x1 lm		
NAME: GU10-9D 2W 4000K 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 1
MFR.: KLITE	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.10	1.08	1.05	1.08	1.06	1.04	1.04	1.02	1.00	.90	.98	.97	.96	.95	.94	.92
2.0	1.03	.98	.95	1.01	.97	.94	.97	.94	.92	.94	.92	.90	.91	.89	.87	.86
3.0	.96	.91	.87	.94	.90	.86	.91	.88	.84	.89	.86	.83	.86	.84	.82	.80
4.0	.90	.84	.80	.88	.83	.79	.86	.82	.78	.84	.80	.77	.82	.79	.76	.75
5.0	.84	.78	.74	.83	.78	.74	.81	.76	.73	.79	.75	.72	.78	.74	.71	.70
6.0	.79	.73	.69	.78	.73	.69	.77	.72	.68	.75	.71	.68	.74	.70	.67	.66
7.0	.75	.69	.65	.74	.68	.64	.72	.68	.64	.71	.67	.63	.70	.66	.63	.62
8.0	.71	.65	.61	.70	.64	.60	.69	.64	.60	.68	.63	.60	.67	.63	.60	.58
9.0	.67	.61	.57	.66	.61	.57	.65	.60	.57	.64	.60	.57	.63	.59	.56	.55
10.0	.64	.58	.54	.63	.58	.54	.62	.57	.54	.61	.57	.54	.61	.56	.53	.52

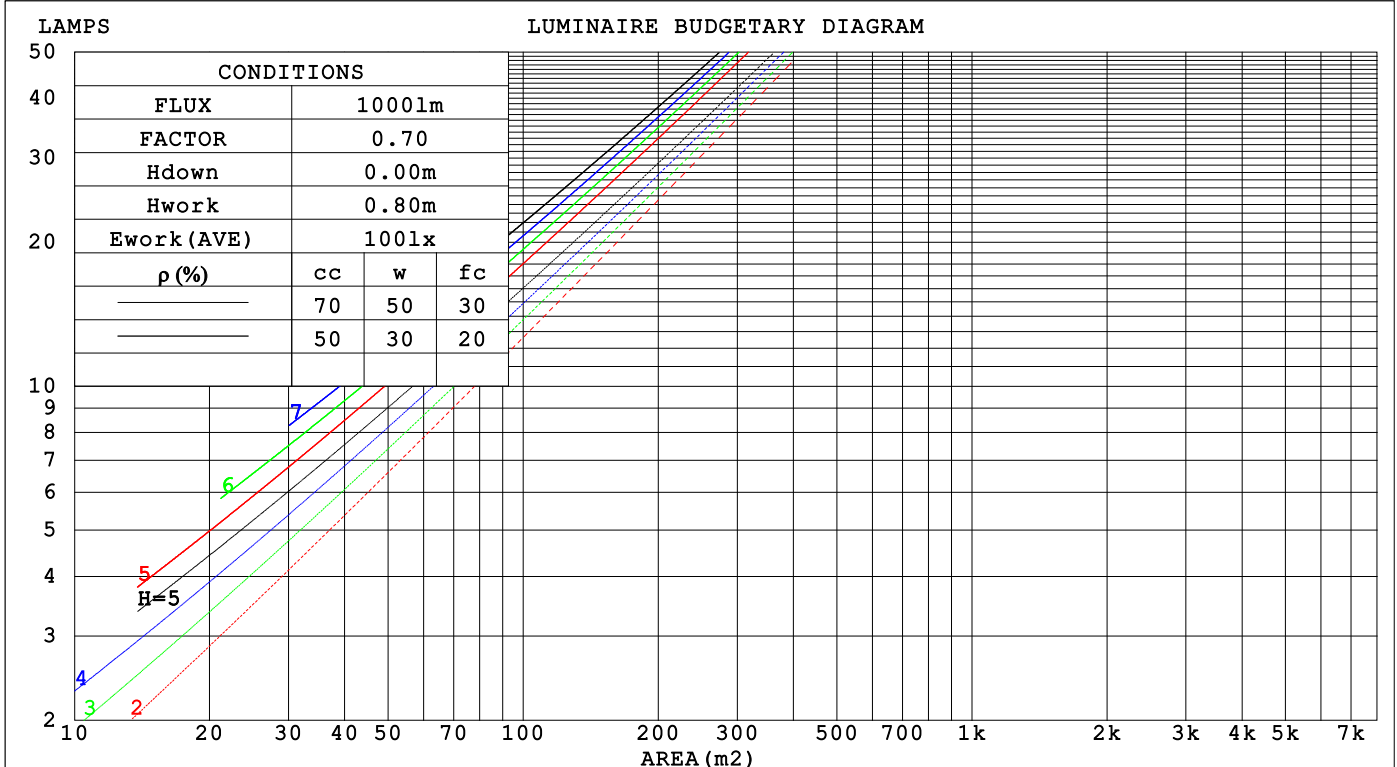

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25°C
Operators:YHX
Test Date:

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Checker: YHX

Assessor: ZQQ

WEC AND CCEC

Test:U:230.20V I:0.0142A P:2.0039W PF:0.6118 Freq:49.99Hz			UTHDi:0.00% ITHDi:0.00% KDisp:0			Lamp Flux:267.904x1 lm		
NAME: GU10-9D 2W 4000K 36D			TYPE:			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.: 1		
MFR.: KLITE			SUR.:			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.182	.104	.033	.175	.100	.032	.162	.093	.030	.150	.086	.028	.139	.080	.026															
2.0	.173	.095	.029	.167	.092	.028	.156	.087	.027	.145	.082	.026	.136	.077	.024															
3.0	.164	.087	.026	.159	.085	.026	.149	.081	.025	.140	.077	.024	.132	.073	.023															
4.0	.155	.081	.024	.151	.079	.023	.142	.076	.023	.135	.072	.022	.127	.069	.021															
5.0	.147	.075	.022	.143	.074	.021	.136	.071	.021	.129	.068	.020	.123	.066	.020															
6.0	.140	.070	.020	.137	.069	.020	.130	.067	.019	.124	.065	.019	.119	.062	.019															
7.0	.133	.066	.019	.130	.065	.019	.125	.063	.018	.119	.061	.018	.114	.059	.017															
8.0	.127	.062	.017	.125	.061	.017	.119	.060	.017	.115	.058	.017	.110	.057	.016															
9.0	.122	.059	.016	.119	.058	.016	.115	.057	.016	.110	.055	.016	.106	.054	.016															
10.0	.116	.056	.015	.114	.055	.015	.110	.054	.015	.106	.053	.015	.102	.052	.015															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.199	.199	.199	.170	.170	.170	.116	.116	.116	.067	.067	.067	.021	.021	.021	
1.0	.180	.166	.153	.154	.142	.132	.105	.098	.091	.061	.057	.053	.019	.018	.017	
2.0	.165	.141	.121	.141	.122	.105	.097	.084	.073	.056	.049	.043	.018	.016	.014	
3.0	.153	.122	.098	.131	.106	.085	.090	.073	.060	.052	.043	.035	.017	.014	.012	
4.0	.143	.108	.081	.122	.093	.071	.084	.065	.050	.049	.038	.029	.016	.012	.010	
5.0	.134	.096	.068	.115	.083	.060	.079	.058	.042	.046	.034	.025	.015	.011	.008	
6.0	.126	.087	.059	.109	.075	.051	.075	.053	.036	.043	.031	.021	.014	.010	.007	
7.0	.120	.079	.051	.103	.069	.045	.071	.048	.032	.041	.028	.019	.013	.009	.006	
8.0	.114	.073	.045	.098	.063	.039	.068	.045	.028	.039	.026	.017	.013	.009	.006	
9.0	.109	.068	.040	.094	.059	.035	.065	.041	.025	.038	.024	.015	.012	.008	.005	
10.0	.104	.063	.037	.090	.055	.032	.062	.039	.023	.036	.023	.014	.012	.008	.004	

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25°C
Operators:YHX
Test Date:

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Checker: YHX

Assessor: ZQQ

UGR(Unified Glare Rating) Table

Test:U:230.20V I:0.0142A P:2.0039W PF:0.6118 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:267.904x1 lm										
NAME: GU10-9D 2W 4000K 36D					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.: 1		
MFR.: KLITE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	11.2	12.2	11.5	12.4	12.5	9.0	10.0	9.3	10.2	10.4
3H	11.1	12.0	11.4	12.2	12.4	9.0	9.8	9.2	10.0	10.3
4H	11.1	11.9	11.4	12.1	12.4	8.9	9.7	9.2	10.0	10.2
6H	11.0	11.8	11.4	12.1	12.3	8.9	9.7	9.2	9.9	10.2
8H	11.0	11.8	11.4	12.0	12.3	8.9	9.7	9.3	9.9	10.2
12H	11.0	11.7	11.4	12.0	12.3	9.0	9.7	9.3	10.0	10.3
4H 2H	11.0	11.8	11.3	12.0	12.3	8.8	9.7	9.1	9.9	10.1
3H	10.9	11.6	11.2	11.9	12.2	8.8	9.5	9.1	9.8	10.1
4H	10.9	11.5	11.2	11.8	12.2	8.8	9.4	9.2	9.8	10.1
6H	10.9	11.4	11.3	11.8	12.2	8.8	9.4	9.2	9.8	10.1
8H	10.9	11.4	11.3	11.8	12.2	8.9	9.4	9.3	9.8	10.2
12H	10.9	11.4	11.4	11.8	12.2	9.0	9.5	9.4	9.9	10.3
8H 4H	10.8	11.3	11.2	11.7	12.0	8.7	9.2	9.1	9.6	10.0
6H	10.8	11.2	11.3	11.6	12.1	8.8	9.3	9.3	9.7	10.1
8H	10.9	11.2	11.3	11.7	12.1	8.9	9.3	9.4	9.8	10.2
12H	10.9	11.3	11.4	11.7	12.2	9.1	9.4	9.6	9.9	10.4
12H 4H	10.7	11.2	11.2	11.6	12.0	8.7	9.2	9.1	9.6	10.0
6H	10.8	11.2	11.2	11.6	12.1	8.8	9.2	9.3	9.6	10.1
8H	10.8	11.2	11.3	11.6	12.1	9.0	9.3	9.5	9.8	10.2
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.6 / - 5.8					+ 2.2 / - 5.2				
1.5H	+ 3.9 / - 6.1					+ 3.6 / - 5.2				
2.0H	+ 6.1 / - 4.5					+ 4.2 / - 2.3				

CIE Pub.117, 267.9 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -4.6)
Area: 0.1 m2

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25°C
Operators:YHX
Test Date:

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Checker: YHX

Assessor: ZQQ

UTILIZATION FACTORS TABLE

Test:U:230.20V I:0.0142A P:2.0039W PF:0.6118 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:267.904x1 lm		
NAME: GU10-9D 2W 4000K 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 1
MFR.: KLITE	SUR.:	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	84	77	73	83	77	73	82	76	73	69
0.80	92	85	81	91	85	81	90	84	81	77
1.00	97	91	87	96	90	86	94	90	86	81
1.25	101	95	92	100	95	91	98	93	90	86
1.50	104	99	95	103	98	95	100	96	93	89
2.00	107	103	99	106	101	98	103	99	97	91
2.50	109	105	101	107	103	100	104	101	98	92
3.00	111	107	104	109	105	103	105	103	100	94
4.00	113	110	107	111	108	106	107	105	103	95
5.00	114	112	109	112	110	108	108	106	104	96
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25°C
Operators:YHX
Test Date:


Checker: YHX

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Assessor: ZQQ

ISOCANDELA DIAGRAM

Test:U:230.20V I:0.0142A P:2.0039W PF:0.6118 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:267.904x1 lm		
NAME: GU10-9D 2W 4000K 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 1
MFR.: KLITE	SUR.:	Shielding Angle:

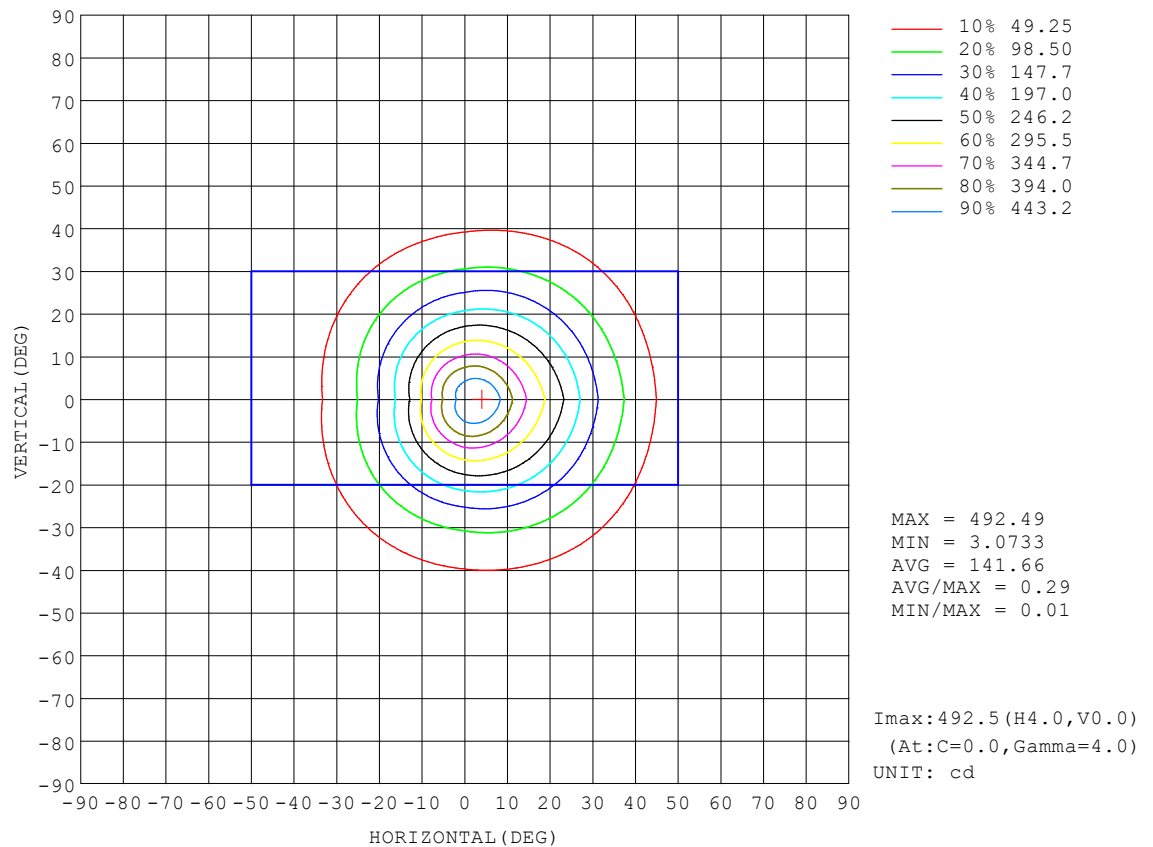

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25°C
Operators:YHX
Test Date:


Checker: YHX

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Assessor: ZQQ

AAI Figure

Test:U:230.20V I:0.0142A P:2.0039W PF:0.6118 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:267.904x1 lm		
NAME: GU10-9D 2W 4000K 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 1
MFR.: KLITE	SUR.:	Shielding Angle:

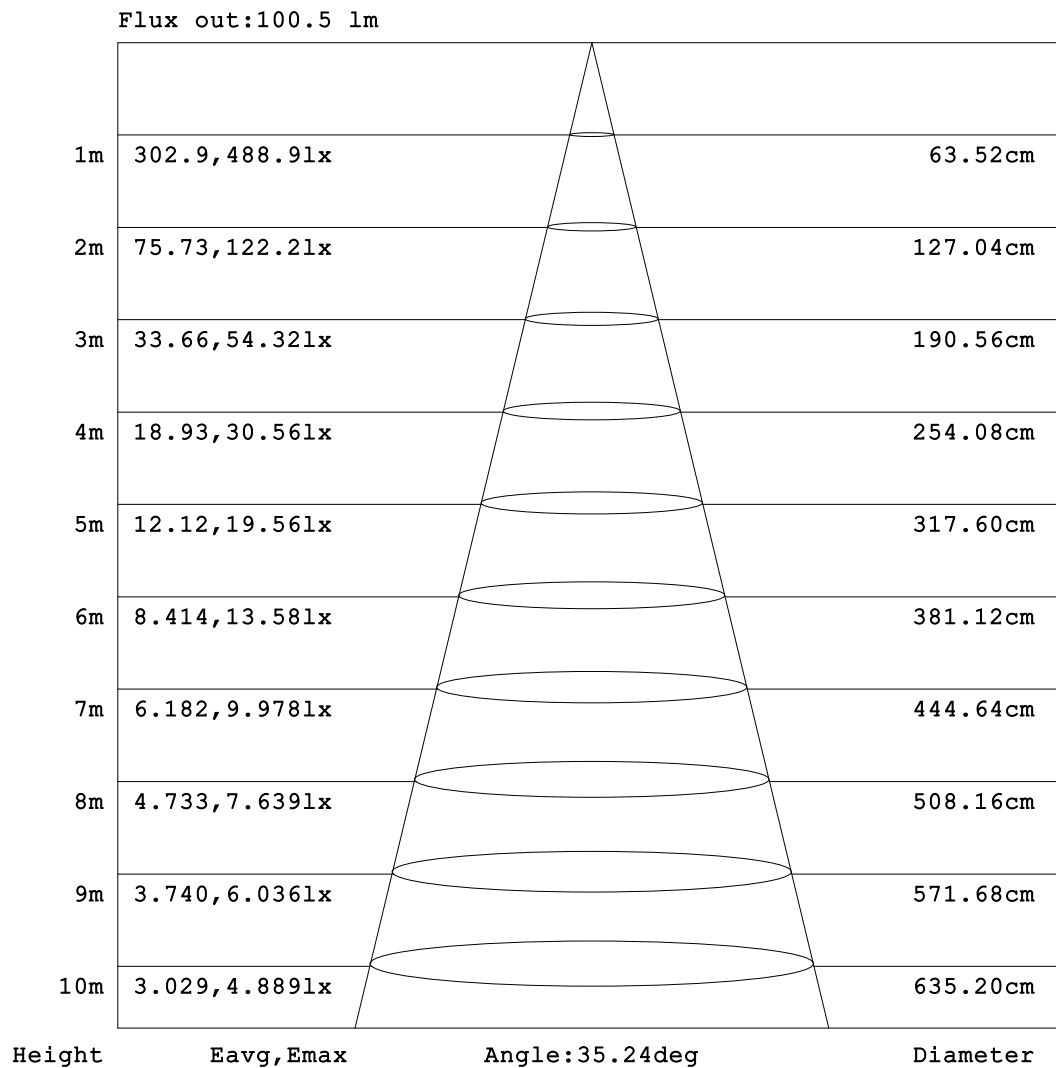

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25°C
Operators:YHX
Test Date:


γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Checker: YHX

Assessor: ZQQ

ISOLUX DIAGRAM

Test:U:230.20V I:0.0142A P:2.0039W PF:0.6118 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:267.904x1 lm		
NAME: GU10-9D 2W 4000K 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 1
MFR.: KLITE	SUR.:	Shielding Angle:

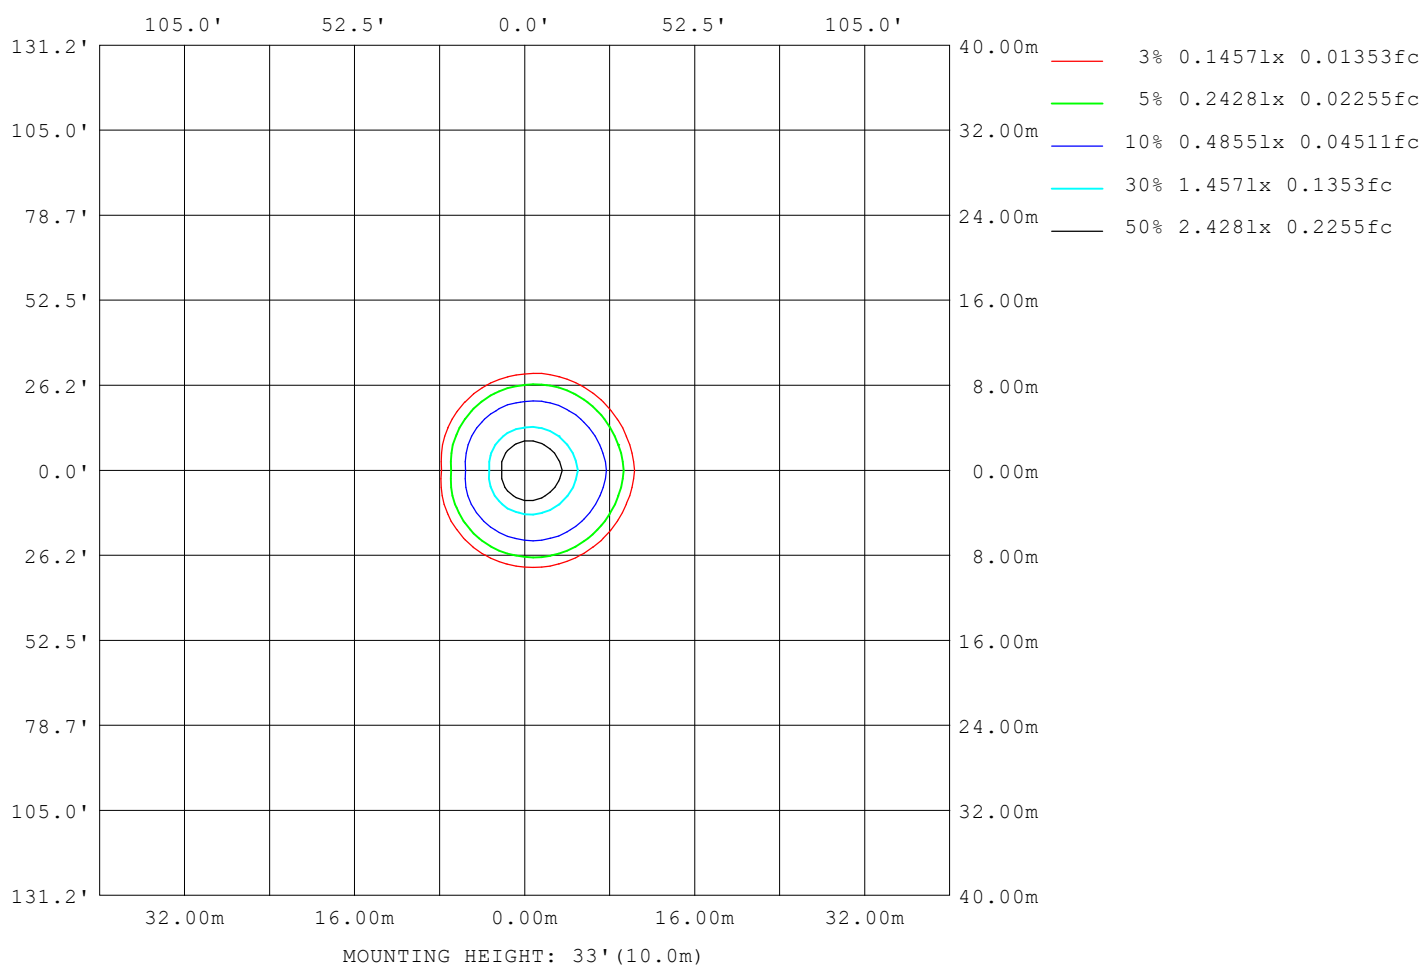

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25°C
Operators:YHX
Test Date:

Checker: YHX

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Assessor: ZQQ

LED Avg.L Report

Test:U:230.20V I:0.0142A P:2.0039W PF:0.6118 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:267.904x1 lm		
NAME: GU10-9D 2W 4000K 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 1
MFR.: KLITE	SUR.:	Shielding Angle:

AvgL	cd/m2
L_0~180 (65) av	47
L_0~180 (75) av	51
L_0~180 (85) av	96
L_90~270 (65) av	46
L_90~270 (75) av	50
L_90~270 (85) av	90
L_45 (65) av	46
L_45 (75) av	50
L_45 (85) av	91

Standard: GB/T 29293-2012


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25℃
Operators:YHX
Test Date:

Checker: YHX

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Assessor: ZQQ

Planar Illuminance Curve

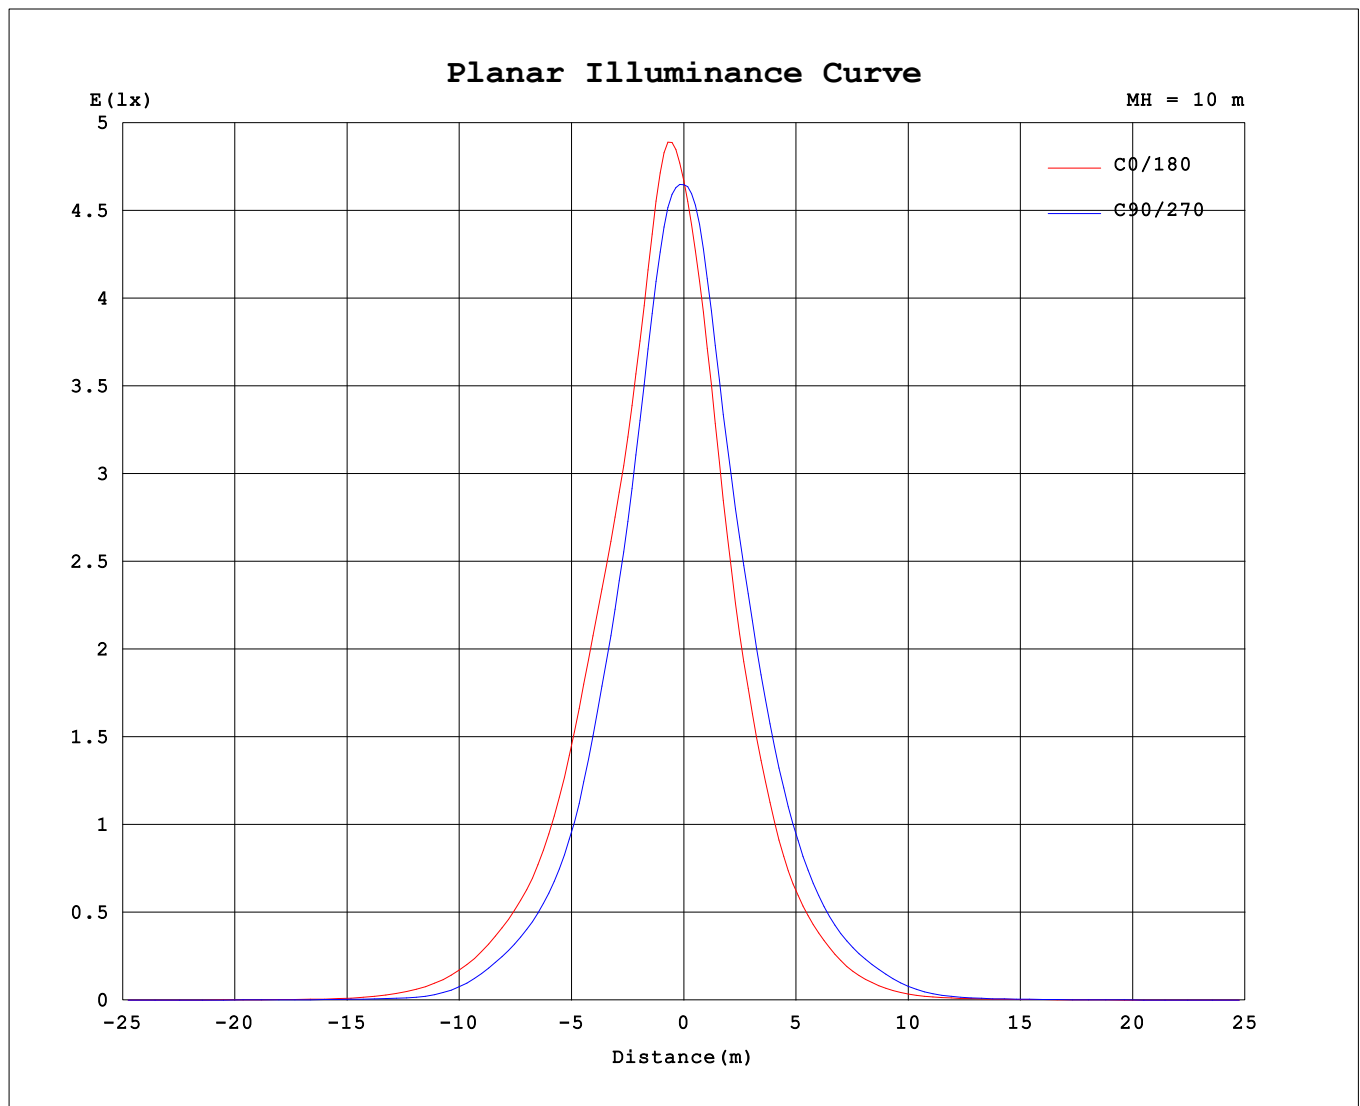

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25°C
 Operators: YHX
 Test Date:

Checker: YHX

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.456
 Humidity: 55%
 Test Distance: 1.160m [K=1.0000]
 Remarks:

Assessor: ZQQ

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.20V I:0.0142A P:2.0039W PF:0.6118 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:267.904x1 lm		
NAME: GU10-9D 2W 4000K 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 1
MFR.: KLITE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	90	180	270														
0	466	466	466	466														
5	487	447	396	434														
10	413	368	298	350														
15	337	284	214	276														
20	282	216	150	207														
25	223	151	98.9	149														
30	161	105	66.3	103														
35	114	73.6	41.1	69.4														
40	81.2	48.1	22.4	45.5														
45	48.4	21.7	10.1	22.7														
50	23.6	6.77	4.90	8.34														
55	8.68	3.49	3.13	4.12														
60	3.62	2.34	2.13	2.78														
65	2.41	1.84	1.60	2.03														
70	1.90	1.57	1.33	1.64														
75	1.60	1.31	1.06	1.29														
80	1.20	1.09	0.92	0.95														
85	0.93	0.84	0.74	0.73														
90	0.72	0.59	0.58	0.55														
95	0.55	0.50	0.42	0.46														
100	0.51	0.49	0.46	0.47														
105	0.59	0.52	0.58	0.46														
110	0.57	0.54	0.73	0.50														
115	0.56	0.59	0.70	0.61														
120	0.56	0.59	0.54	0.48														
125	0.48	0.48	0.49	0.42														
130	0.42	0.48	0.52	0.39														
135	0.41	0.50	0.50	0.40														
140	0.39	0.44	0.43	0.38														
145	0.37	0.41	0.41	0.39														
150	0.37	0.42	0.42	0.41														
155	0.38	0.46	0.43	0.43														
160	0.39	0.50	0.41	0.41														
165	0.34	0.47	0.35	0.35														
170	0.16	0.30	0.22	0.22														
175	0.04	0.04	0.05	0.05														
180	0.00	0.00	0.00	0.00														

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25℃
Operators:YHX
Test Date:

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Checker: YHX

Assessor: ZQQ