


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:230.10V I:0.0200A P:3.0W PF:0.6449 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:345 x1 lm		
NAME:PDF with rated value 0019590115 LAMP 3W 2700K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 2
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 115 lm/W			
MODEL		I _{max} (cd)	767.6	S/MH(C0/180)	0.61
NOMINAL POWER(W)	3	LOR(%)	100.0	S/MH(C90/270)	0.51
RATED VOLTAGE(V)	345	TOTAL FLUX(lm)	345	η UP,DN(C0-180)	0.7,51.5
NOMINAL FLUX(lm)	345	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.6,47.2
LAMPS INSIDE	1	η up (%)	1.3	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)		η down (%)	98.7	CIBSE SHR MAX	0.60

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

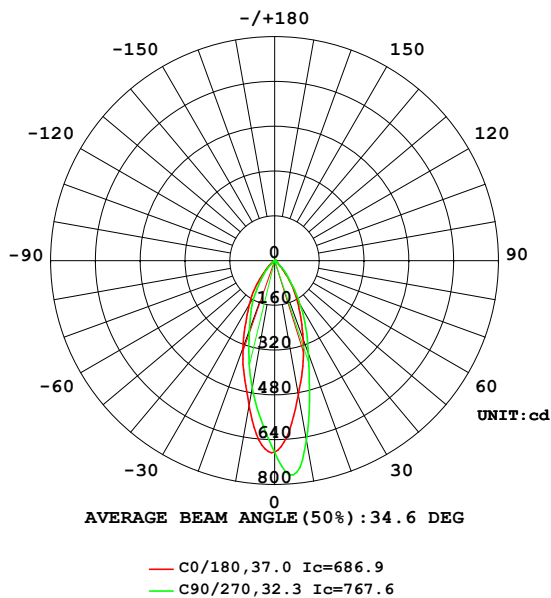

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

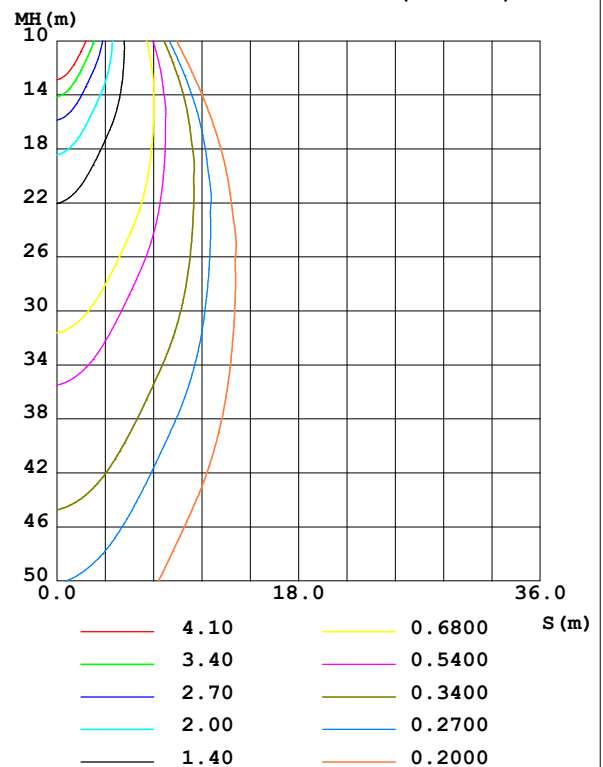

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25°C
Operators: YHX
Test Date: 2025-09-11

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity: 55%
Test Distance: 1.160m [K=1.0000]
Remarks:

Checker: YHX

Assessor: ZQQ

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C90	C180	C270					γ	Φ zone	Φ total	%lum, lamp
10	487.6	653.2	527.0	462.3					0- 10	58.00	58.00	14.7,14.7
20	298.9	353.8	332.1	265.0					10- 20	114.7	172.7	43.8,43.8
30	158.8	184.9	180.7	144.5					20- 30	107.0	279.7	70.9,70.9
40	60.06	70.85	76.32	55.16					30- 40	69.14	348.8	88.4,88.4
50	14.99	14.43	20.01	8.103					40- 50	27.11	375.9	95.2,95.2
60	4.313	5.028	4.718	3.557					50- 60	6.820	382.8	97,97
70	2.638	2.601	2.725	2.285					60- 70	3.285	386.0	97.8,97.8
80	1.602	1.733	1.762	1.430					70- 80	2.167	388.2	98.4,98.4
90	0.9042	1.111	1.099	0.7371					80- 90	1.419	389.6	98.7,98.7
100	0.8507	0.6706	0.7676	0.8454					90-100	0.9024	390.5	98.9,98.9
110	1.155	0.8487	1.017	0.8342					100-110	0.8850	391.4	99.2,99.2
120	1.059	1.186	0.9623	0.7088					110-120	1.077	392.5	99.4,99.4
130	1.020	0.7449	0.7783	0.6702					120-130	0.7794	393.3	99.6,99.6
140	0.6876	0.7582	0.6015	0.5383					130-140	0.5544	393.8	99.8,99.8
150	0.6882	0.7012	0.5951	0.5892					140-150	0.3977	394.2	99.9,99.9
160	0.6820	0.7080	0.6386	0.6264					150-160	0.3063	394.5	100,100
170	0.1874	0.4101	0.4179	0.4119					160-170	0.1647	394.7	100,100
180	0.0127	0	0.0224	0.0237					170-180	0.0164	394.7	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 366.83 lm

%lum = 92.9%

%lamp = 92.9%

Conical surface Flux(120deg): 382.75 lm

%lum = 97.0%

%lamp = 97.0%

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25°C
Operators:YHX
Test Date:2025-09-11


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Checker: YHX

Assessor: ZQQ

LUMINANCE LIMITATION CURVES

Test: U:230.10V I:0.0200A P:2.9746W PF:0.6449 Freq:49.99Hz UTHDi: 0.00% ITHDi: 0.00% KDisp: 0 Lamp Flux: 394.708x1 lm		
NAME: GU10-9D 3W 2700K 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 2
MFR.: KLITE	SUR.:	Shielding Angle:

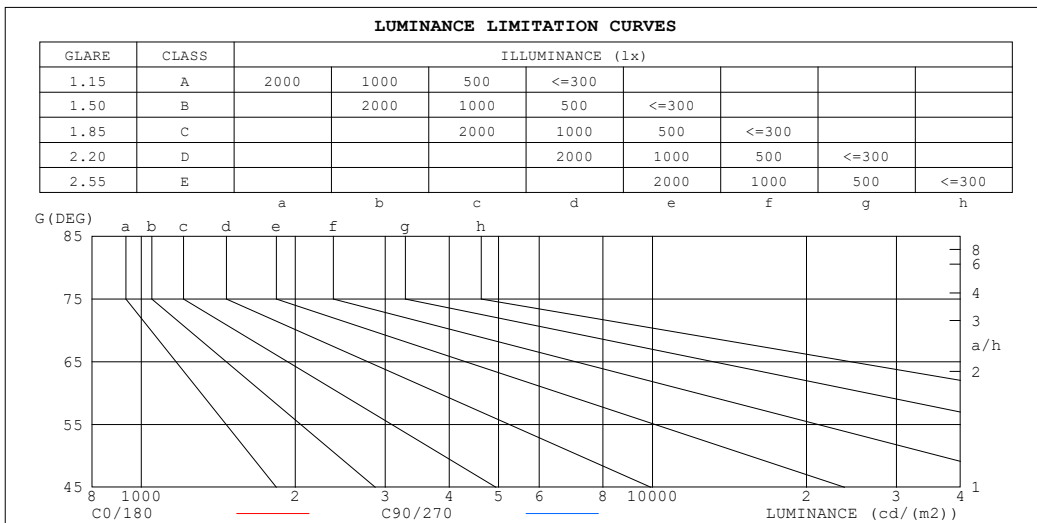

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	143	163
80	92	100
75	78	79
70	77	76
65	77	81
60	86	101
55	117	132
50	232	226
45	452	563

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25°C
Operators:YHX
Test Date:2025-09-11

Checker: YHX


γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Assessor: ZQQ

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.10V I:0.0200A P:2.9746W PF:0.6449 Freq:49.99Hz			UTHDi:0.00% ITHDi:0.00% KDisp:0			Lamp Flux:394.708x1 lm		
NAME: GU10-9D 3W 2700K 36D			TYPE:			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.: 2		
MFR.: KLITE			SUR.:			Shielding Angle:		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.99
1.0	1.10	1.08	1.05	1.08	1.06	1.04	1.04	1.02	1.00	.90	.98	.97	.96	.95	.94	.92
2.0	1.03	.98	.95	1.01	.97	.94	.97	.94	.92	.94	.92	.90	.91	.89	.87	.86
3.0	.96	.91	.87	.94	.90	.86	.91	.88	.84	.89	.86	.83	.86	.84	.82	.80
4.0	.90	.84	.80	.88	.83	.79	.86	.82	.78	.84	.80	.77	.82	.79	.76	.75
5.0	.84	.78	.74	.83	.78	.74	.81	.77	.73	.79	.75	.72	.78	.74	.71	.70
6.0	.79	.73	.69	.78	.73	.69	.77	.72	.68	.75	.71	.68	.74	.70	.67	.66
7.0	.75	.69	.65	.74	.68	.65	.73	.68	.64	.71	.67	.64	.70	.66	.63	.62
8.0	.71	.65	.61	.70	.65	.61	.69	.64	.60	.68	.63	.60	.67	.63	.60	.58
9.0	.67	.61	.57	.67	.61	.57	.66	.61	.57	.65	.60	.57	.64	.60	.57	.55
10.0	.64	.58	.54	.63	.58	.54	.62	.57	.54	.62	.57	.54	.61	.57	.54	.52

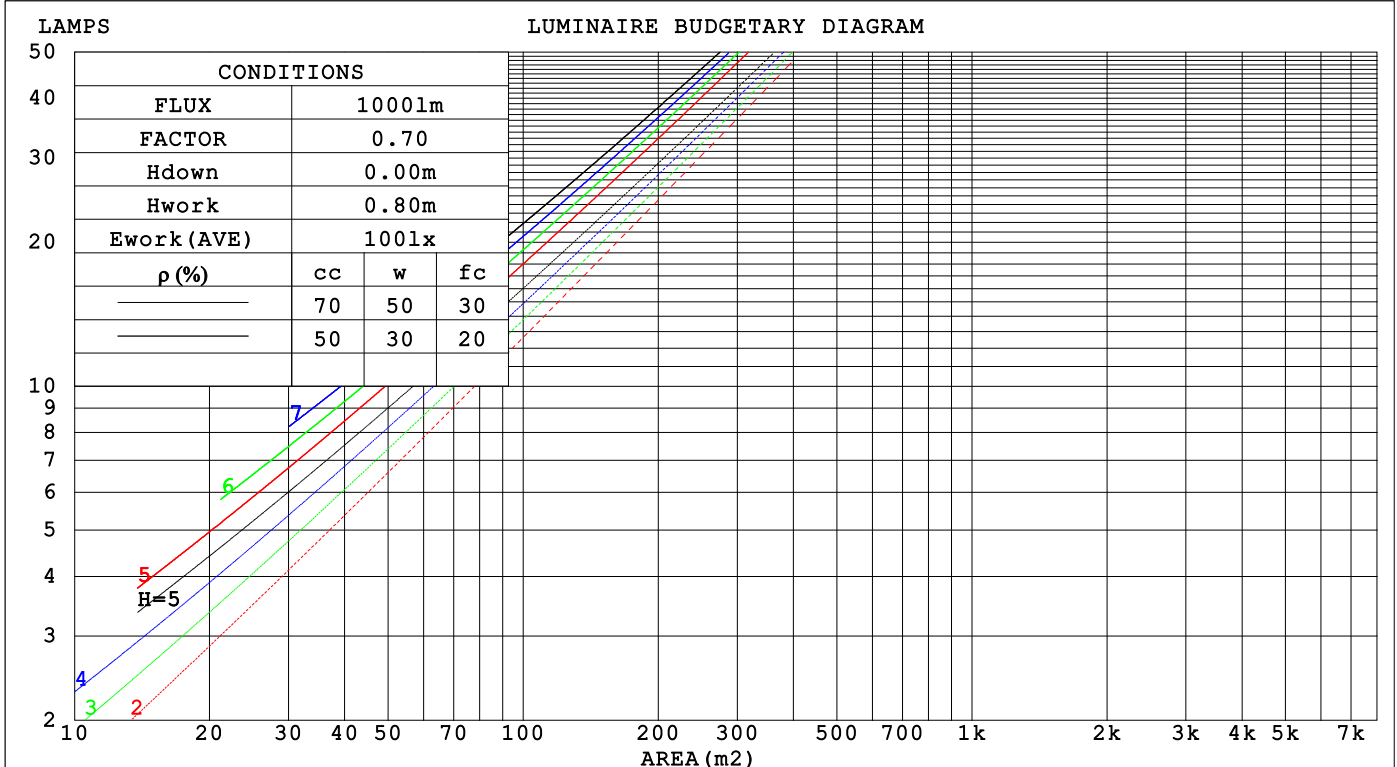

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25°C
Operators:YHX
Test Date:2025-09-11

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Checker: YHX

Assessor: ZQQ

WEC AND CCEC

Test:U:230.10V I:0.0200A P:2.9746W PF:0.6449 Freq:49.99Hz			UTHDi:0.00% ITHDi:0.00% KDisp:0			Lamp Flux:394.708x1 lm		
NAME: GU10-9D 3W 2700K 36D			TYPE:			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.: 2		
MFR.: KLITE			SUR.:			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.182	.104	.033	.175	.100	.032	.162	.093	.030	.149	.086	.028	.138	.080	.026															
2.0	.173	.095	.029	.167	.092	.028	.155	.086	.027	.145	.081	.025	.135	.076	.024															
3.0	.163	.087	.026	.158	.085	.025	.148	.080	.024	.139	.076	.023	.131	.073	.022															
4.0	.155	.080	.024	.150	.079	.023	.142	.075	.022	.134	.072	.022	.127	.069	.021															
5.0	.147	.075	.022	.143	.073	.021	.135	.070	.021	.129	.068	.020	.122	.065	.020															
6.0	.139	.070	.020	.136	.069	.020	.129	.066	.019	.123	.064	.019	.118	.062	.018															
7.0	.133	.066	.019	.130	.065	.018	.124	.063	.018	.119	.061	.018	.113	.059	.017															
8.0	.127	.062	.017	.124	.061	.017	.119	.059	.017	.114	.058	.017	.109	.056	.016															
9.0	.121	.059	.016	.119	.058	.016	.114	.056	.016	.110	.055	.016	.105	.054	.015															
10.0	.116	.056	.015	.114	.055	.015	.109	.054	.015	.106	.052	.015	.102	.051	.015															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.200	.200	.200	.171	.171	.171	.117	.117	.117	.067	.067	.067	.021	.021	.021	
1.0	.181	.167	.154	.155	.143	.133	.106	.099	.092	.061	.057	.053	.020	.018	.017	
2.0	.166	.142	.122	.142	.123	.106	.098	.085	.074	.056	.049	.043	.018	.016	.014	
3.0	.154	.124	.099	.132	.107	.086	.091	.074	.060	.052	.043	.036	.017	.014	.012	
4.0	.144	.109	.082	.123	.094	.072	.085	.066	.050	.049	.038	.030	.016	.013	.010	
5.0	.135	.097	.070	.116	.084	.061	.080	.059	.043	.046	.035	.025	.015	.011	.008	
6.0	.127	.088	.060	.109	.076	.052	.075	.053	.037	.044	.031	.022	.014	.010	.007	
7.0	.121	.080	.052	.104	.070	.046	.072	.049	.032	.042	.029	.019	.013	.009	.006	
8.0	.115	.074	.046	.099	.064	.040	.068	.045	.029	.040	.027	.017	.013	.009	.006	
9.0	.110	.069	.042	.094	.060	.036	.065	.042	.026	.038	.025	.015	.012	.008	.005	
10.0	.105	.065	.038	.090	.056	.033	.063	.039	.023	.037	.023	.014	.012	.008	.005	

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25°C
Operators:YHX
Test Date:2025-09-11

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Checker: YHX

Assessor: ZQQ

UGR(Unified Glare Rating) Table

Test:U:230.10V I:0.0200A P:2.9746W PF:0.6449 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:394.708x1 lm										
NAME: GU10-9D 3W 2700K 36D					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.: 2		
MFR.: KLITE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	8.0	8.9	8.2	9.1	9.3	8.5	9.5	8.8	9.7	9.9
3H	7.9	8.8	8.2	9.0	9.2	8.5	9.3	8.8	9.6	9.8
4H	7.9	8.8	8.2	9.0	9.2	8.5	9.3	8.8	9.5	9.8
6H	8.0	8.7	8.3	9.0	9.3	8.5	9.3	8.8	9.5	9.8
8H	8.0	8.7	8.3	9.0	9.3	8.5	9.3	8.9	9.5	9.8
12H	8.0	8.7	8.4	9.0	9.3	8.6	9.3	8.9	9.6	9.9
4H 2H	7.8	8.6	8.1	8.8	9.1	8.3	9.2	8.6	9.4	9.6
3H	7.8	8.5	8.1	8.8	9.1	8.3	9.0	8.7	9.3	9.6
4H	7.9	8.5	8.2	8.8	9.1	8.4	9.0	8.7	9.3	9.6
6H	8.0	8.5	8.3	8.9	9.2	8.4	9.0	8.8	9.4	9.7
8H	8.0	8.5	8.4	8.9	9.3	8.5	9.1	8.9	9.4	9.8
12H	8.1	8.6	8.6	9.0	9.4	8.7	9.1	9.1	9.5	10.0
8H 4H	7.8	8.3	8.2	8.7	9.1	8.3	8.8	8.7	9.2	9.6
6H	8.0	8.4	8.4	8.8	9.3	8.4	8.9	8.9	9.3	9.7
8H	8.1	8.5	8.6	8.9	9.4	8.6	9.0	9.1	9.4	9.9
12H	8.3	8.7	8.8	9.1	9.6	8.9	9.2	9.3	9.6	10.1
12H 4H	7.8	8.2	8.2	8.6	9.0	8.3	8.7	8.7	9.1	9.5
6H	8.0	8.4	8.4	8.8	9.3	8.4	8.8	8.9	9.3	9.7
8H	8.2	8.5	8.6	8.9	9.4	8.6	9.0	9.1	9.4	9.9
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.0 / - 3.8					+ 2.2 / - 3.9				
1.5H	+ 3.7 / - 3.8					+ 3.9 / - 4.0				
2.0H	+ 4.0 / - 1.9					+ 4.9 / - 1.9				

CIE Pub.117, 394.7 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -3.2)
Area: 0.1 m2

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25°C
Operators:YHX
Test Date:2025-09-11

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Checker: YHX

Assessor: ZQQ

UTILIZATION FACTORS TABLE

Test:U:230.10V I:0.0200A P:2.9746W PF:0.6449 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:394.708x1 lm		
NAME: GU10-9D 3W 2700K 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 2
MFR.: KLITE	SUR.:	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	84	77	73	84	77	73	83	77	73	69
0.80	92	86	82	91	85	81	90	85	81	77
1.00	97	91	87	96	90	87	94	90	86	82
1.25	101	96	92	100	95	91	98	94	90	86
1.50	104	99	95	103	98	95	100	97	94	89
2.00	107	103	99	106	101	98	103	99	97	91
2.50	109	105	102	107	103	101	104	101	99	92
3.00	111	107	104	109	105	103	105	103	100	94
4.00	113	110	107	111	108	106	107	105	103	95
5.00	114	112	109	112	110	108	108	106	105	96
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25°C
Operators: YHX
Test Date: 2025-09-11


Checker: YHX

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity: 55%
Test Distance: 1.160m [K=1.0000]
Remarks:

Assessor: ZQQ

ISOCANDELA DIAGRAM

Test:U:230.10V I:0.0200A P:2.9746W PF:0.6449 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:394.708x1 lm		
NAME: GU10-9D 3W 2700K 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 2
MFR.: KLITE	SUR.:	Shielding Angle:

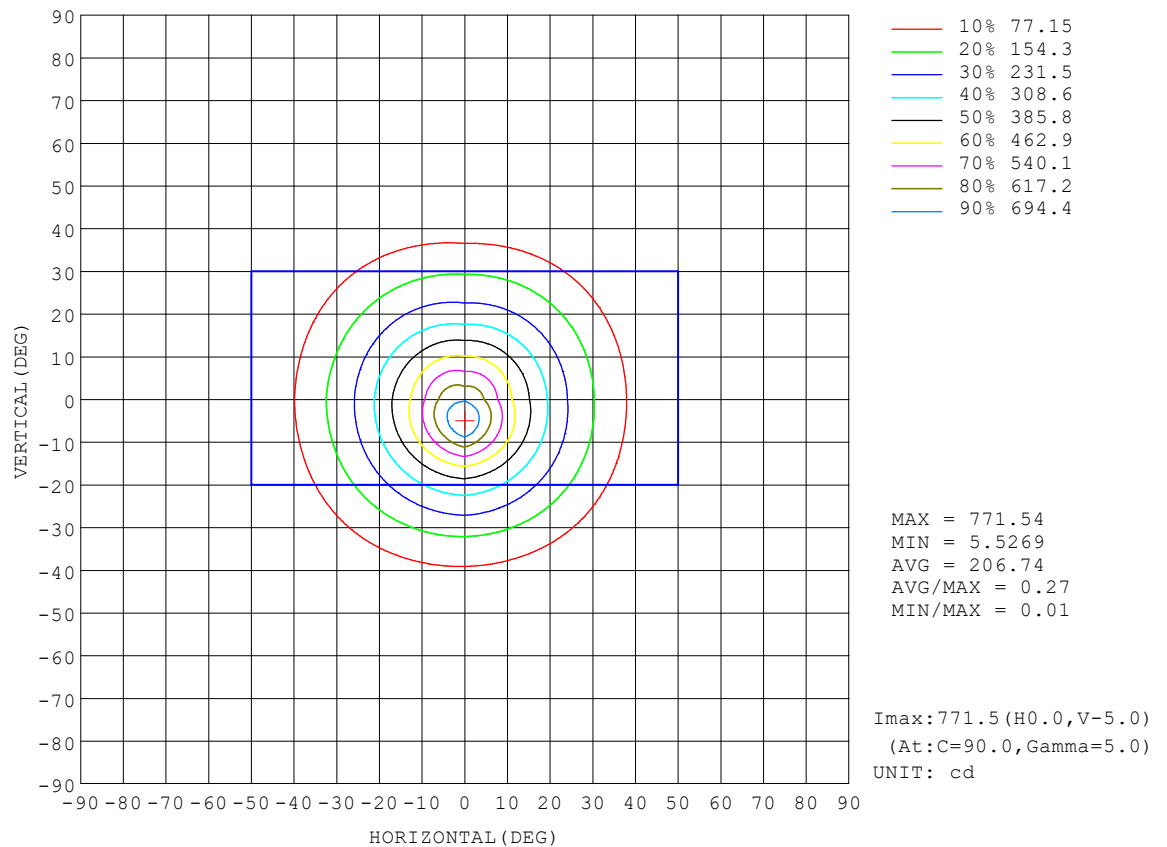

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25°C
 Operators:YHX
 Test Date:2025-09-11


Checker: YHX

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
 Humidity:55%
 Test Distance:1.160m [K=1.0000]
 Remarks:

Assessor: ZQQ

AAI Figure

Test:U:230.10V I:0.0200A P:2.9746W PF:0.6449 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:394.708x1 lm		
NAME: GU10-9D 3W 2700K 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 2
MFR.: KLITE	SUR.:	Shielding Angle:

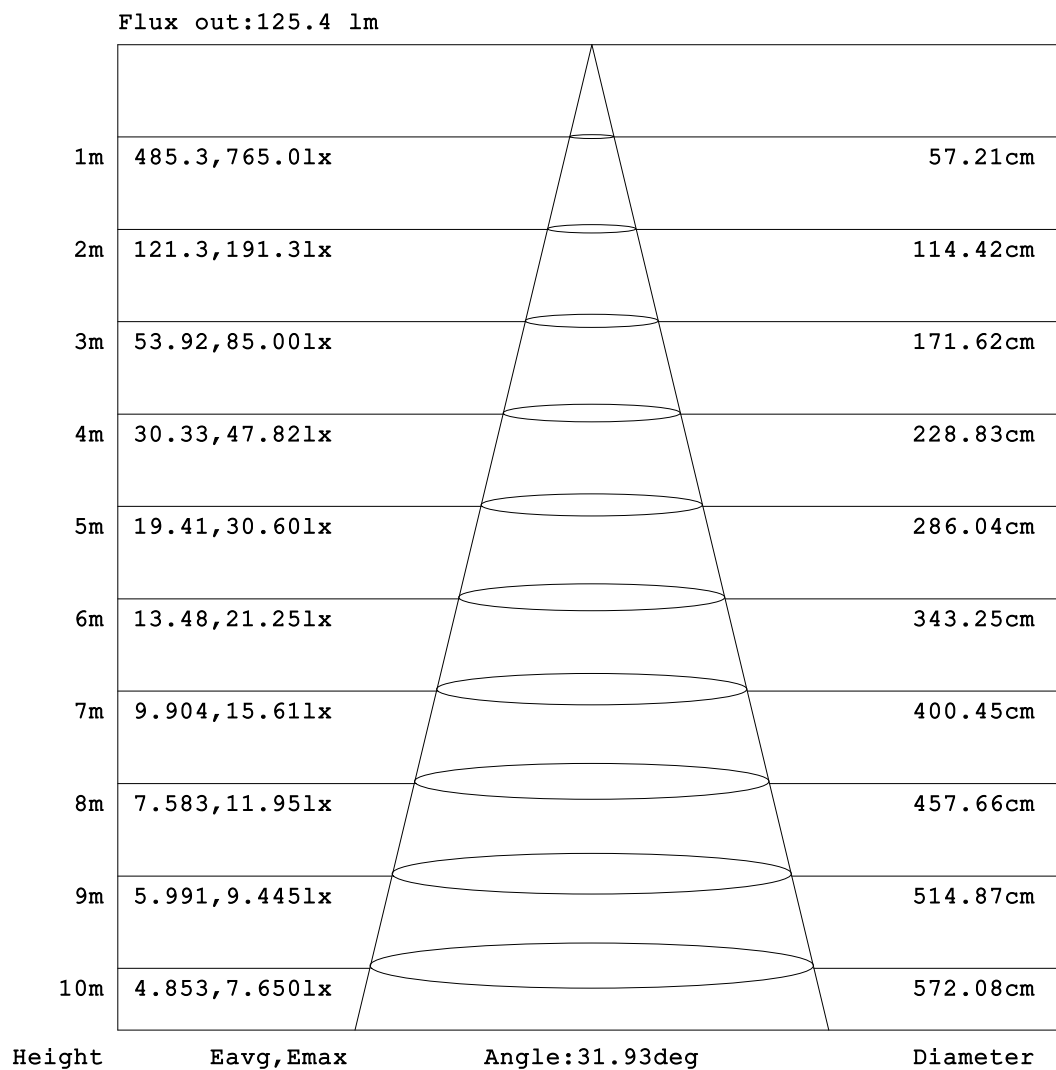

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25°C
Operators:YHX
Test Date:2025-09-11


γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Checker: YHX

Assessor: ZQQ

ISOLUX DIAGRAM

Test:U:230.10V I:0.0200A P:2.9746W PF:0.6449 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:394.708x1 lm		
NAME: GU10-9D 3W 2700K 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 2
MFR.: KLITE	SUR.:	Shielding Angle:

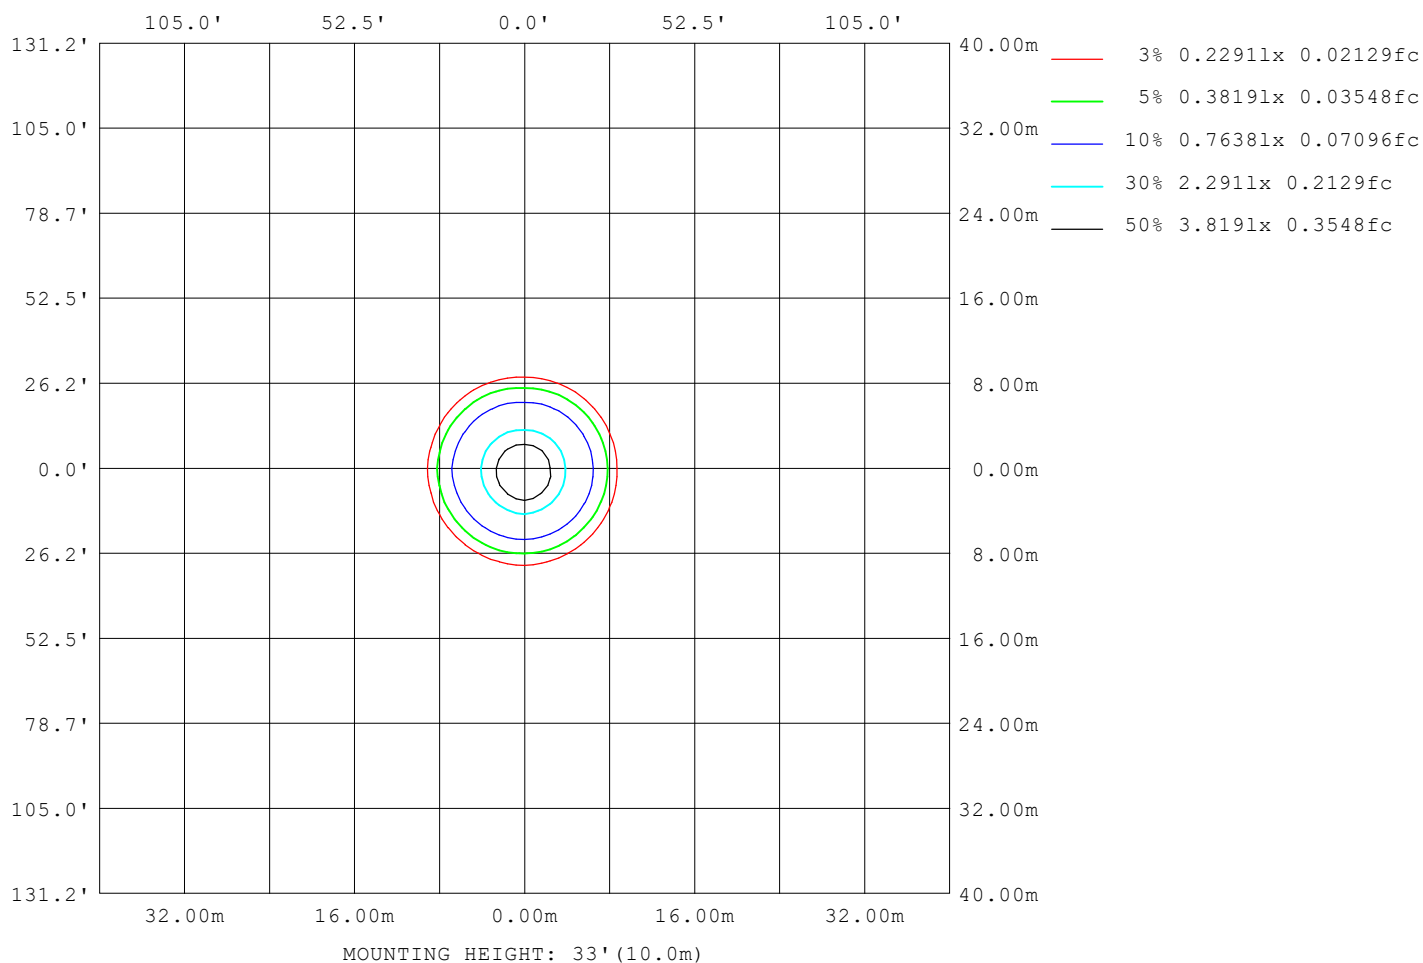

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25°C
Operators:YHX
Test Date:2025-09-11

Checker: YHX

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Assessor: ZQQ

LED Avg.L Report

Test:U:230.10V I:0.0200A P:2.9746W PF:0.6449 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:394.708x1 lm		
NAME: GU10-9D 3W 2700K 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 2
MFR.: KLITE	SUR.:	Shielding Angle:

AvgL	cd/m2
L_0~180 (65) av	80
L_0~180 (75) av	81
L_0~180 (85) av	147
L_90~270 (65) av	74
L_90~270 (75) av	76
L_90~270 (85) av	158
L_45 (65) av	76
L_45 (75) av	78
L_45 (85) av	154

Standard: GB/T 29293-2012


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25℃
Operators:YHX
Test Date:2025-09-11

Checker: YHX

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Assessor: ZQQ

Planar Illuminance Curve

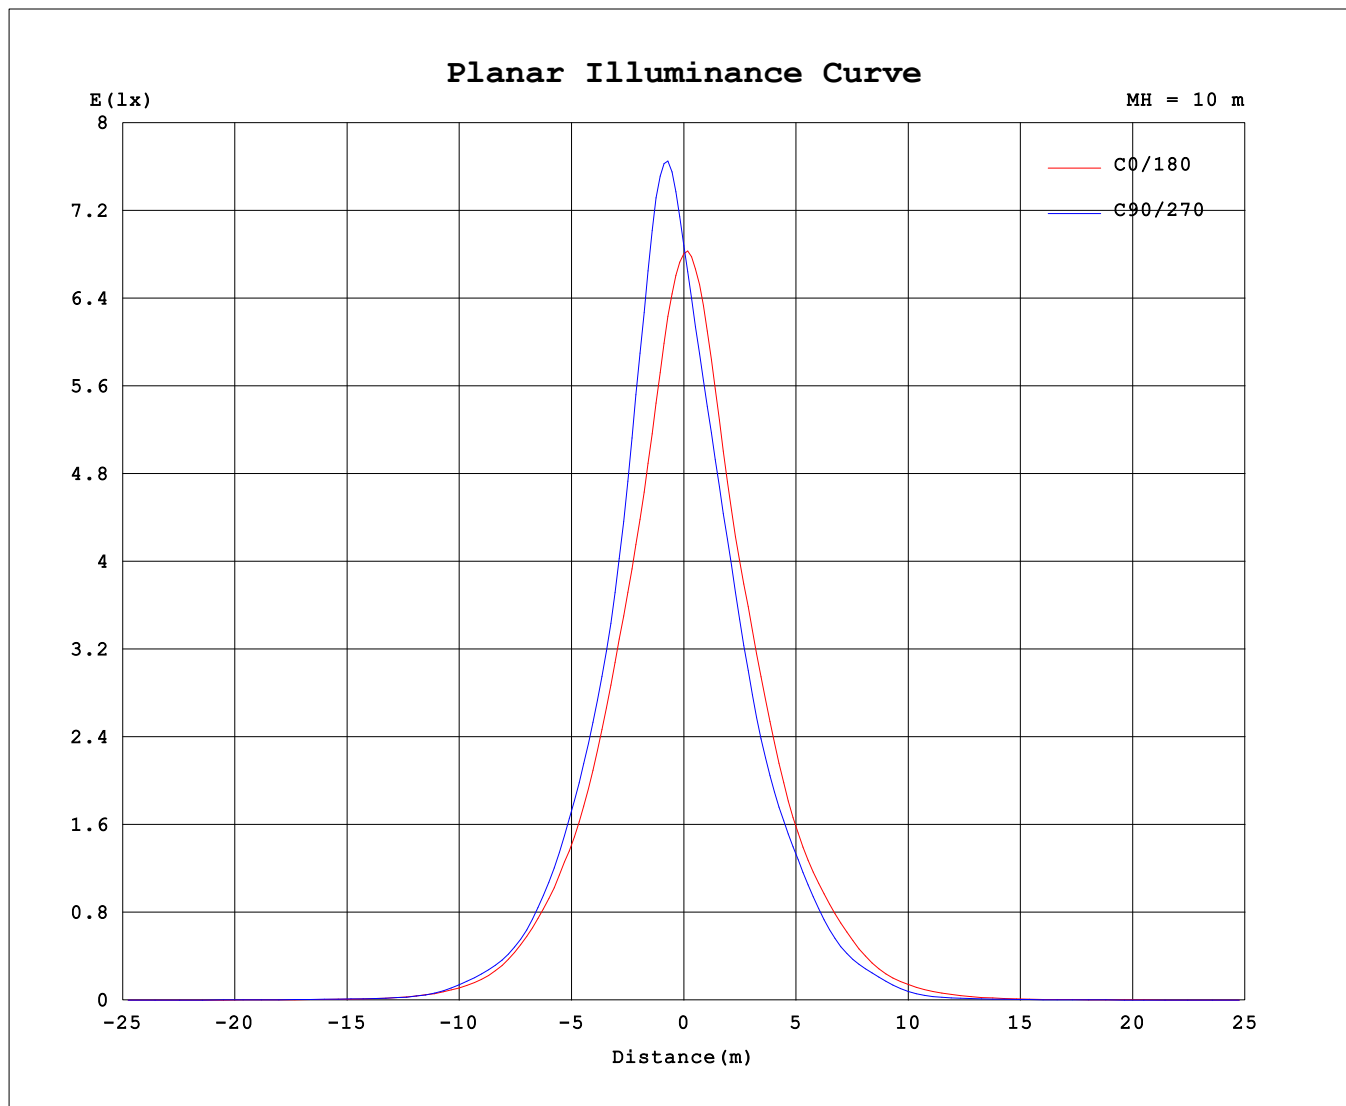

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25°C
 Operators: YHX
 Test Date: 2025-09-11

Checker: YHX

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.456
 Humidity: 55%
 Test Distance: 1.160m [K=1.0000]
 Remarks:

Assessor: ZQQ

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.10V I:0.0200A P:2.9746W PF:0.6449 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:394.708x1 lm		
NAME: GU10-9D 3W 2700K 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 2
MFR.: KLITE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	90	180	270														
0	684	684	684	684														
5	609	768	644	569														
10	488	653	527	462														
15	391	482	424	357														
20	299	354	332	265														
25	220	265	245	203														
30	159	185	181	145														
35	106	116	129	88.7														
40	60.1	70.9	76.3	55.2														
45	32.2	39.6	40.7	22.3														
50	15.0	14.4	20.0	8.10														
55	6.74	7.52	8.74	4.71														
60	4.31	5.03	4.72	3.56														
65	3.27	3.39	3.50	2.82														
70	2.64	2.60	2.73	2.28														
75	2.04	2.03	2.16	1.90														
80	1.60	1.73	1.76	1.43														
85	1.25	1.41	1.32	1.34														
90	0.90	1.11	1.10	0.74														
95	0.79	0.81	0.76	0.83														
100	0.85	0.67	0.77	0.85														
105	0.90	0.70	0.86	0.85														
110	1.16	0.85	1.02	0.83														
115	1.22	1.48	1.14	0.81														
120	1.06	1.19	0.96	0.71														
125	0.98	0.85	0.83	0.73														
130	1.02	0.74	0.78	0.67														
135	0.84	0.73	0.67	0.58														
140	0.69	0.76	0.60	0.54														
145	0.67	0.70	0.57	0.56														
150	0.69	0.70	0.60	0.59														
155	0.71	0.71	0.63	0.62														
160	0.68	0.71	0.64	0.63														
165	0.56	0.64	0.59	0.58														
170	0.19	0.41	0.42	0.41														
175	0.07	0.08	0.13	0.13														
180	0.01	0.00	0.02	0.02														

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25℃
Operators:YHX
Test Date:2025-09-11

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Checker: YHX

Assessor: ZQQ