


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:230.15V I:0.0202A P:3.0 W PF:0.6369 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:345 x1 lm		
NAME:PDF with rated value 0019590117 LAMP 3W 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 139.46 lm/W			
MODEL		I _{max} (cd)	730.6	S/MH(C0/180)	0.63
NOMINAL POWER(W)	3	LOR(%)	100.0	S/MH(C90/270)	0.53
RATED VOLTAGE(V)	345	TOTAL FLUX(lm)	345	η UP,DN(C0-180)	0.7,47.8
NOMINAL FLUX(lm)	345	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.6,50.8
LAMPS INSIDE	1	η up (%)	1.3	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)		η down (%)	98.7	CIBSE SHR MAX	0.65

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

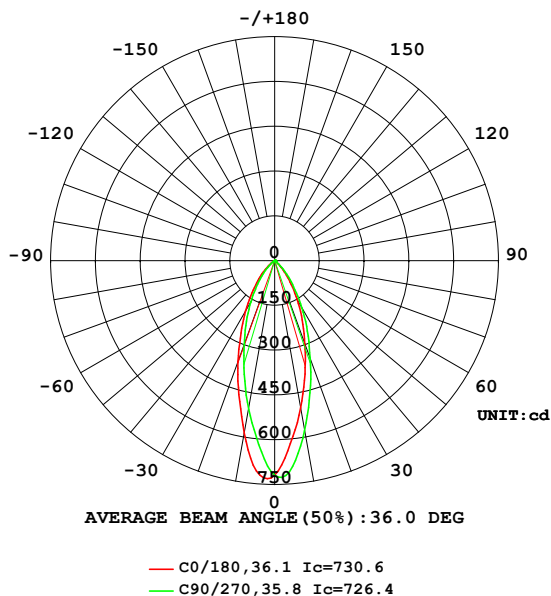

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

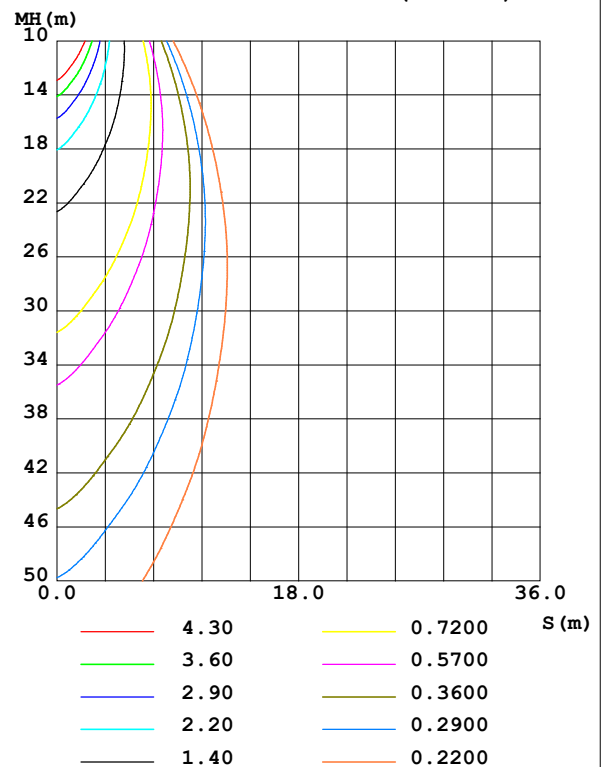

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: MEDIUM
Temperature:25°C
Operators:YHX
Test Date:

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Checker: YHX

Assessor: ZQQ

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C90	C180	C270					γ	Φ zone	Φ total	%lum, lamp
10	501.0	578.9	586.5	505.2					0- 10	59.04	59.04	14.3,14.3
20	296.6	348.0	360.5	299.7					10- 20	118.6	177.6	43,43
30	152.4	183.8	195.2	160.6					20- 30	111.4	289.0	70,70
40	57.13	74.02	87.76	67.71					30- 40	72.34	361.3	87.5,87.5
50	9.945	16.79	25.39	16.56					40- 50	31.30	392.6	95.1,95.1
60	3.504	4.255	5.874	4.176					50- 60	7.529	400.2	96.9,96.9
70	2.229	2.599	3.197	2.444					60- 70	3.326	403.5	97.7,97.7
80	1.447	1.901	1.985	1.675					70- 80	2.260	405.8	98.3,98.3
90	0.8820	1.240	1.304	1.023					80- 90	1.507	407.3	98.7,98.7
100	0.8892	0.9717	0.9021	0.8183					90-100	1.001	408.3	98.9,98.9
110	0.9276	1.294	0.8984	0.9528					100-110	0.9839	409.2	99.1,99.1
120	0.8268	1.409	1.093	0.7795					110-120	1.078	410.3	99.4,99.4
130	0.7406	0.9478	1.164	0.7604					120-130	0.8308	411.2	99.6,99.6
140	0.6452	0.8177	0.7431	0.6477					130-140	0.6109	411.8	99.8,99.8
150	0.7083	0.8017	0.7342	0.6942					140-150	0.4487	412.2	99.9,99.9
160	0.7669	0.8288	0.7920	0.7470					150-160	0.3514	412.6	99.9,99.9
170	0.1396	0.5493	0.5531	0.4984					160-170	0.2024	412.8	100,100
180	0.0186	0.0140	0.0312	0.0318					170-180	0.0196	412.8	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 381.64 lm

%lum = 92.5%

%lamp = 92.5%

Conical surface Flux(120deg): 400.16 lm

%lum = 96.9%

%lamp = 96.9%

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: MEDIUM
Temperature:25°C
Operators:YHX
Test Date:


Checker: YHX

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Assessor: ZQQ

LUMINANCE LIMITATION CURVES

Test: U:230.15V I:0.0202A P:2.9599W PF:0.6369 Freq:49.99Hz UTHDi: 0.00% ITHDi: 0.00% KDisp: 0 Lamp Flux: 412.785x1 lm		
NAME: GU10-9D 3W 4000K 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: KLITE	SUR.:	Shielding Angle:

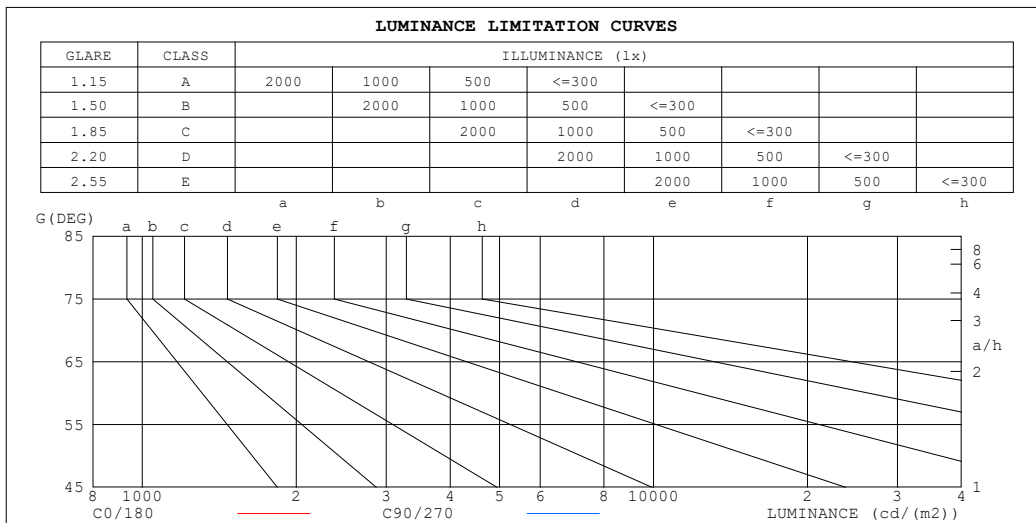

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	121	173
80	83	110
75	70	84
70	65	76
65	65	74
60	70	85
55	89	124
50	155	262
45	383	570

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: MEDIUM
Temperature:25°C
Operators:YHX
Test Date:

Checker: YHX


γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Assessor: ZQQ

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.15V I:0.0202A P:2.9599W PF:0.6369 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:412.785x1 lm		
NAME: GU10-9D 3W 4000K 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: KLITE	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.99
1.0	1.10	1.08	1.05	1.08	1.06	1.04	1.04	1.02	1.00	.90	.98	.97	.96	.95	.94	.92
2.0	1.02	.98	.95	1.01	.97	.94	.97	.94	.91	.94	.91	.89	.91	.89	.87	.86
3.0	.96	.90	.87	.94	.89	.86	.91	.87	.84	.89	.85	.83	.86	.84	.81	.80
4.0	.89	.84	.80	.88	.83	.79	.86	.81	.78	.84	.80	.77	.82	.78	.76	.74
5.0	.84	.78	.74	.83	.77	.73	.81	.76	.73	.79	.75	.72	.77	.74	.71	.70
6.0	.79	.73	.69	.78	.72	.68	.76	.71	.68	.75	.71	.67	.73	.70	.67	.65
7.0	.74	.68	.64	.74	.68	.64	.72	.67	.64	.71	.67	.63	.70	.66	.63	.61
8.0	.70	.64	.60	.70	.64	.60	.68	.63	.60	.67	.63	.60	.66	.62	.59	.58
9.0	.67	.61	.57	.66	.61	.57	.65	.60	.57	.64	.60	.56	.63	.59	.56	.55
10.0	.63	.58	.54	.63	.57	.54	.62	.57	.54	.61	.57	.53	.60	.56	.53	.52

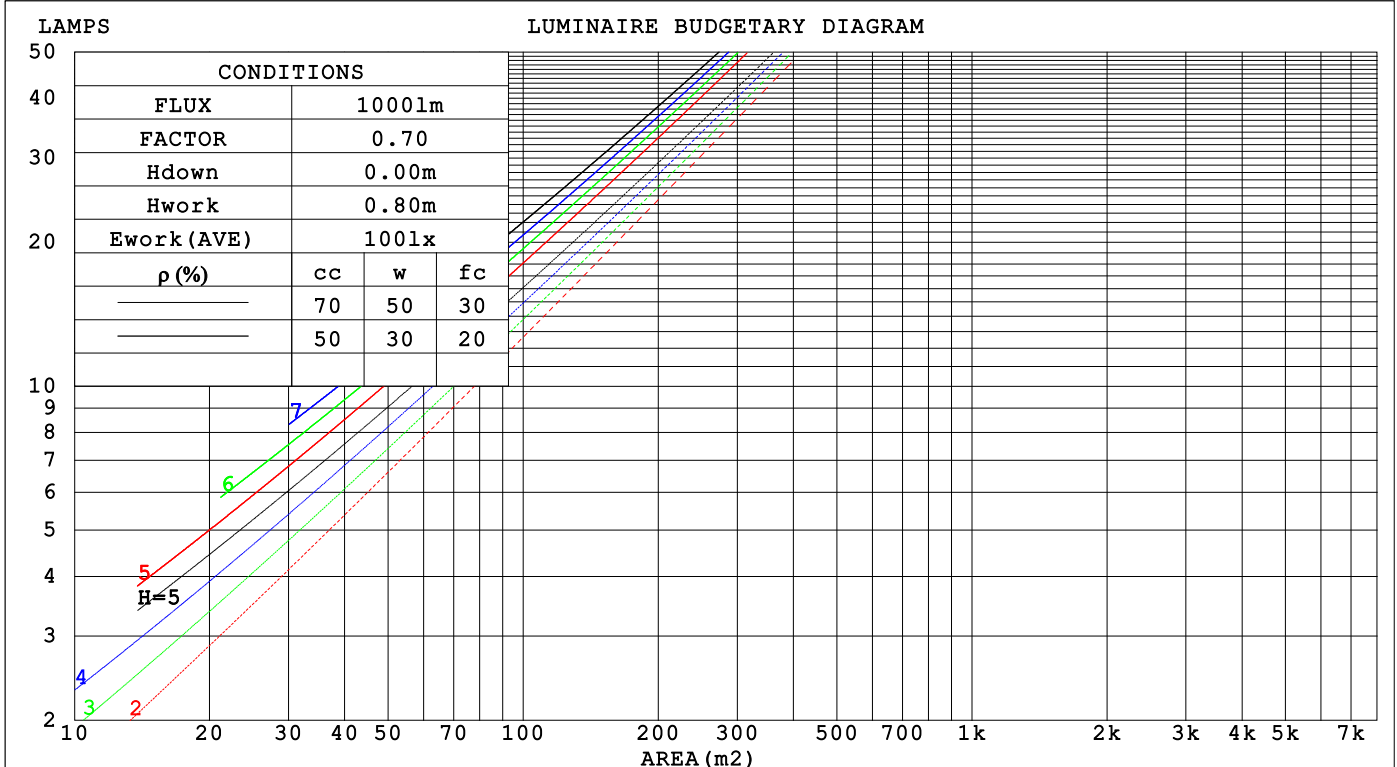

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: MEDIUM
Temperature:25°C
Operators:YHX
Test Date:

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Checker: YHX

Assessor: ZQQ

WEC AND CCEC

Test:U:230.15V I:0.0202A P:2.9599W PF:0.6369 Freq:49.99Hz			UTHDi:0.00% ITHDi:0.00% KDisp:0			Lamp Flux:412.785x1 lm		
NAME: GU10-9D 3W 4000K 36D			TYPE:			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: KLITE			SUR.:			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.183	.104	.033	.176	.101	.032	.163	.093	.030	.151	.087	.028	.139	.081	.026															
2.0	.174	.095	.029	.168	.092	.028	.156	.087	.027	.146	.082	.026	.136	.077	.024															
3.0	.164	.088	.026	.159	.085	.026	.150	.081	.025	.141	.077	.024	.132	.073	.023															
4.0	.156	.081	.024	.151	.079	.023	.143	.076	.023	.135	.072	.022	.128	.069	.021															
5.0	.148	.075	.022	.144	.074	.022	.136	.071	.021	.130	.068	.020	.123	.066	.020															
6.0	.141	.070	.020	.137	.069	.020	.131	.067	.019	.124	.065	.019	.119	.063	.019															
7.0	.134	.066	.019	.131	.065	.019	.125	.063	.018	.120	.061	.018	.114	.059	.017															
8.0	.128	.062	.018	.125	.062	.017	.120	.060	.017	.115	.058	.017	.110	.057	.016															
9.0	.122	.059	.016	.120	.058	.016	.115	.057	.016	.110	.055	.016	.106	.054	.016															
10.0	.117	.056	.016	.115	.055	.015	.110	.054	.015	.106	.053	.015	.103	.052	.015															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.201	.201	.201	.172	.172	.172	.117	.117	.117	.067	.067	.067	.022	.022	.022	
1.0	.182	.168	.155	.156	.144	.133	.106	.099	.092	.061	.057	.054	.020	.018	.017	
2.0	.167	.143	.123	.143	.123	.106	.098	.085	.074	.056	.049	.043	.018	.016	.014	
3.0	.155	.124	.100	.133	.107	.086	.091	.074	.061	.053	.043	.036	.017	.014	.012	
4.0	.144	.109	.083	.124	.094	.072	.085	.066	.051	.049	.039	.030	.016	.013	.010	
5.0	.136	.098	.070	.116	.085	.061	.080	.059	.043	.046	.035	.025	.015	.011	.008	
6.0	.128	.089	.060	.110	.077	.052	.076	.054	.037	.044	.032	.022	.014	.010	.007	
7.0	.121	.081	.053	.104	.070	.046	.072	.049	.032	.042	.029	.019	.014	.009	.006	
8.0	.116	.075	.047	.100	.065	.041	.069	.046	.029	.040	.027	.017	.013	.009	.006	
9.0	.110	.070	.042	.095	.060	.037	.066	.042	.026	.038	.025	.015	.012	.008	.005	
10.0	.106	.065	.038	.091	.057	.033	.063	.040	.024	.037	.024	.014	.012	.008	.005	

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: MEDIUM
Temperature:25°C
Operators:YHX
Test Date:

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Checker: YHX

Assessor: ZQQ

UGR(Unified Glare Rating) Table

Test:U:230.15V I:0.0202A P:2.9599W PF:0.6369 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:412.785x1 lm										
NAME: GU10-9D 3W 4000K 36D					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: KLITE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	7.2	8.1	7.4	8.3	8.5	8.2	9.1	8.4	9.3	9.5
3H	7.1	8.0	7.4	8.2	8.4	8.1	9.0	8.4	9.2	9.4
4H	7.1	7.9	7.4	8.2	8.4	8.1	8.9	8.4	9.2	9.4
6H	7.1	7.9	7.5	8.2	8.4	8.1	8.9	8.5	9.2	9.4
8H	7.2	7.9	7.5	8.2	8.5	8.2	8.9	8.5	9.2	9.5
12H	7.2	7.9	7.5	8.2	8.5	8.3	9.0	8.6	9.3	9.6
4H 2H	7.0	7.8	7.3	8.0	8.3	8.0	8.8	8.3	9.0	9.3
3H	7.0	7.7	7.3	8.0	8.3	7.9	8.6	8.3	8.9	9.2
4H	7.0	7.7	7.4	8.0	8.3	8.0	8.6	8.3	8.9	9.3
6H	7.1	7.7	7.5	8.0	8.4	8.1	8.6	8.5	9.0	9.4
8H	7.2	7.7	7.6	8.1	8.5	8.2	8.7	8.6	9.1	9.5
12H	7.3	7.8	7.7	8.2	8.6	8.4	8.8	8.8	9.2	9.6
8H 4H	7.0	7.5	7.4	7.9	8.3	7.9	8.4	8.3	8.8	9.2
6H	7.2	7.6	7.6	8.0	8.4	8.1	8.5	8.5	8.9	9.4
8H	7.3	7.7	7.8	8.1	8.6	8.3	8.7	8.8	9.1	9.6
12H	7.5	7.8	8.0	8.3	8.8	8.5	8.9	9.0	9.3	9.8
12H 4H	6.9	7.4	7.4	7.8	8.2	7.9	8.3	8.3	8.7	9.2
6H	7.2	7.5	7.6	8.0	8.5	8.1	8.5	8.6	8.9	9.4
8H	7.4	7.7	7.8	8.1	8.6	8.3	8.6	8.8	9.1	9.6
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.0 / - 4.1					+ 2.4 / - 4.1				
1.5H	+ 3.7 / - 4.0					+ 4.1 / - 4.3				
2.0H	+ 3.8 / - 1.6					+ 5.0 / - 2.0				

CIE Pub.117, 412.8 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -3.1)
Area: 0.1 m2

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: MEDIUM
Temperature:25°C
Operators:YHX
Test Date:

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Checker: YHX

Assessor: ZQQ

UTILIZATION FACTORS TABLE

Test:U:230.15V I:0.0202A P:2.9599W PF:0.6369 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:412.785x1 lm		
NAME: GU10-9D 3W 4000K 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: KLITE	SUR.:	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	84	77	73	83	77	73	82	76	72	69
0.80	92	85	81	91	85	81	89	84	80	76
1.00	97	90	86	96	90	86	94	90	86	81
1.25	101	95	91	100	95	91	98	93	90	86
1.50	104	99	95	103	98	94	100	96	93	88
2.00	107	102	99	105	101	98	102	99	96	91
2.50	109	105	101	107	103	100	104	101	98	92
3.00	110	107	104	109	105	103	105	102	100	93
4.00	113	110	107	110	108	106	107	104	103	95
5.00	114	111	109	112	109	108	107	106	104	96
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: MEDIUM
Temperature:25°C
Operators:YHX
Test Date:


Checker: YHX

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Assessor: ZQQ

ISOCANDELA DIAGRAM

Test:U:230.15V I:0.0202A P:2.9599W PF:0.6369 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:412.785x1 lm		
NAME: GU10-9D 3W 4000K 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: KLITE	SUR.:	Shielding Angle:

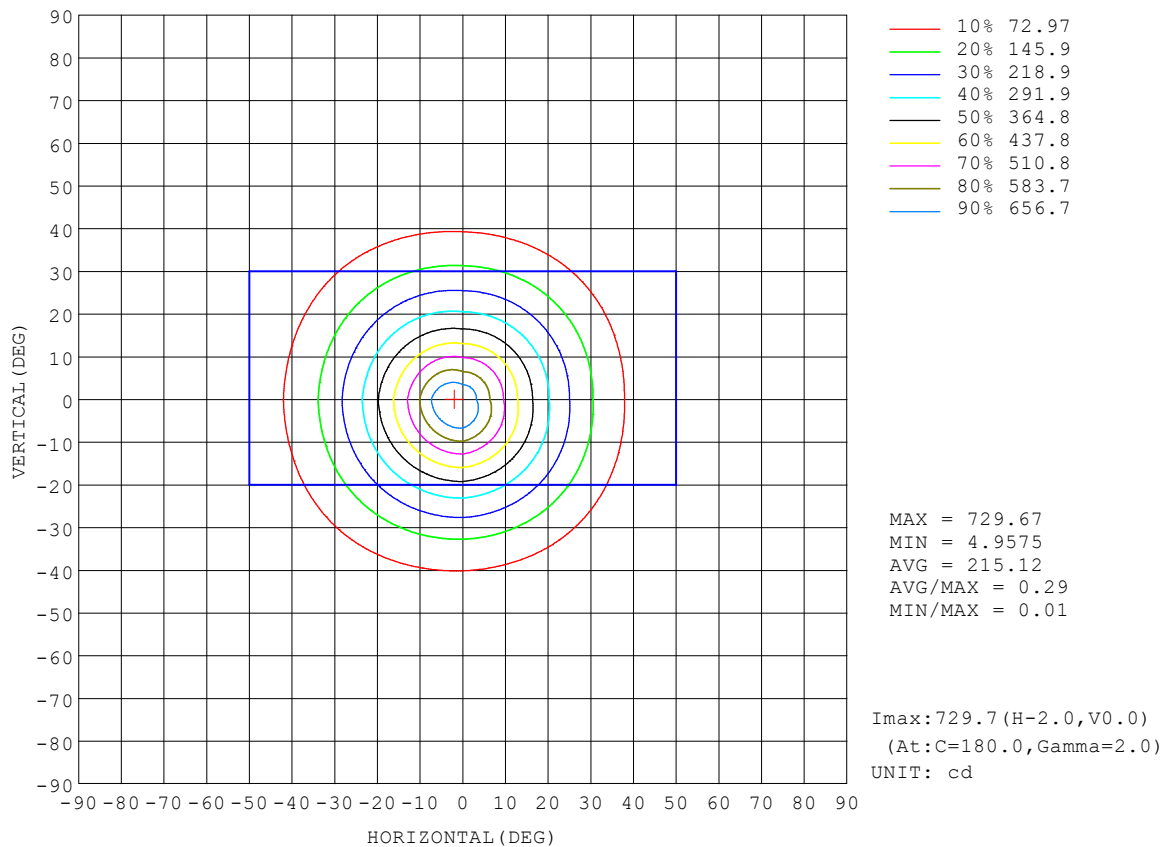

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: MEDIUM
Temperature:25°C
Operators:YHX
Test Date:


Checker: YHX

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Assessor: ZQQ

AAI Figure

Test:U:230.15V I:0.0202A P:2.9599W PF:0.6369 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:412.785x1 lm		
NAME: GU10-9D 3W 4000K 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: KLITE	SUR.:	Shielding Angle:

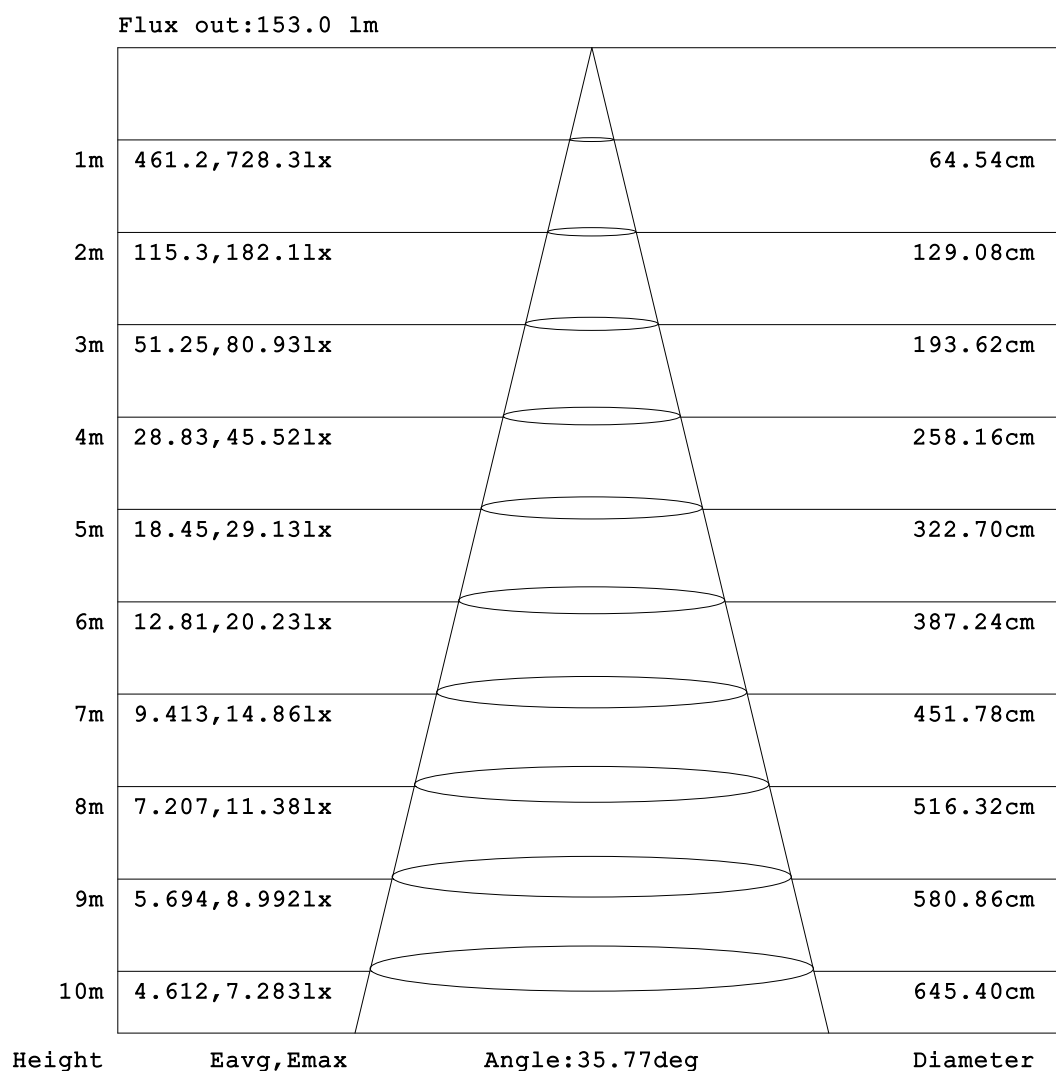

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: MEDIUM
Temperature:25°C
Operators:YHX
Test Date:


γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Checker: YHX

Assessor: ZQQ

ISOLUX DIAGRAM

Test:U:230.15V I:0.0202A P:2.9599W PF:0.6369 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:412.785x1 lm		
NAME: GU10-9D 3W 4000K 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: KLITE	SUR.:	Shielding Angle:

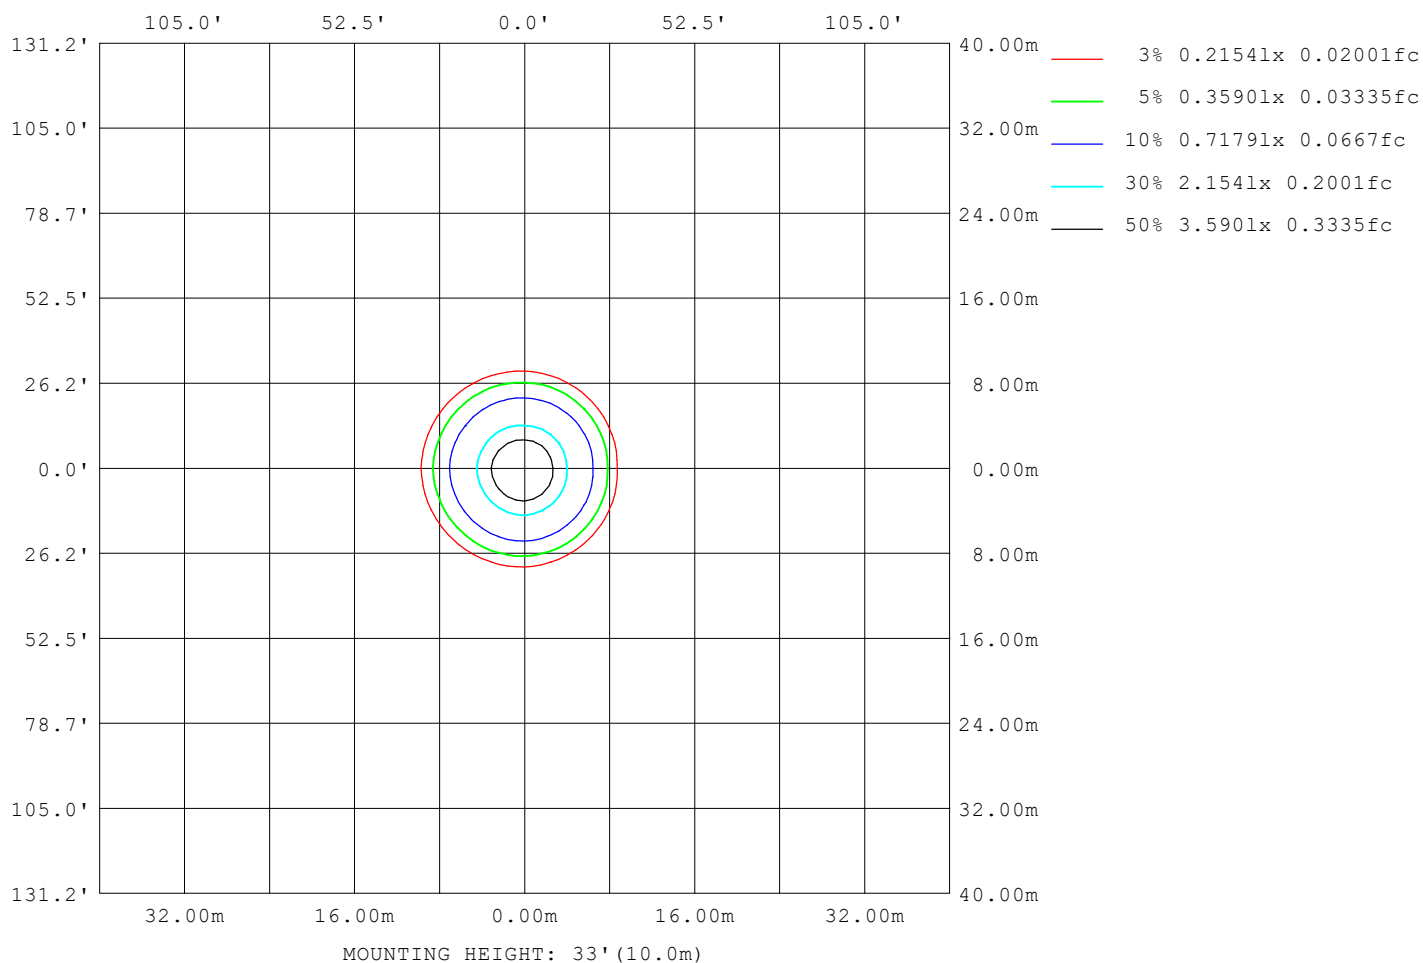

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: MEDIUM
Temperature:25°C
Operators:YHX
Test Date:

Checker: YHX

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Assessor: ZQQ

LED Avg.L Report

Test:U:230.15V I:0.0202A P:2.9599W PF:0.6369 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:412.785x1 lm		
NAME: GU10-9D 3W 4000K 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: KLITE	SUR.:	Shielding Angle:

AvgL	cd/m2
L_0~180 (65) av	81
L_0~180 (75) av	85
L_0~180 (85) av	144
L_90~270 (65) av	74
L_90~270 (75) av	79
L_90~270 (85) av	165
L_45 (65) av	77
L_45 (75) av	82
L_45 (85) av	159

Standard: GB/T 29293-2012


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: MEDIUM
Temperature:25℃
Operators:YHX
Test Date:

Checker: YHX

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Assessor: ZQQ

Planar Illuminance Curve

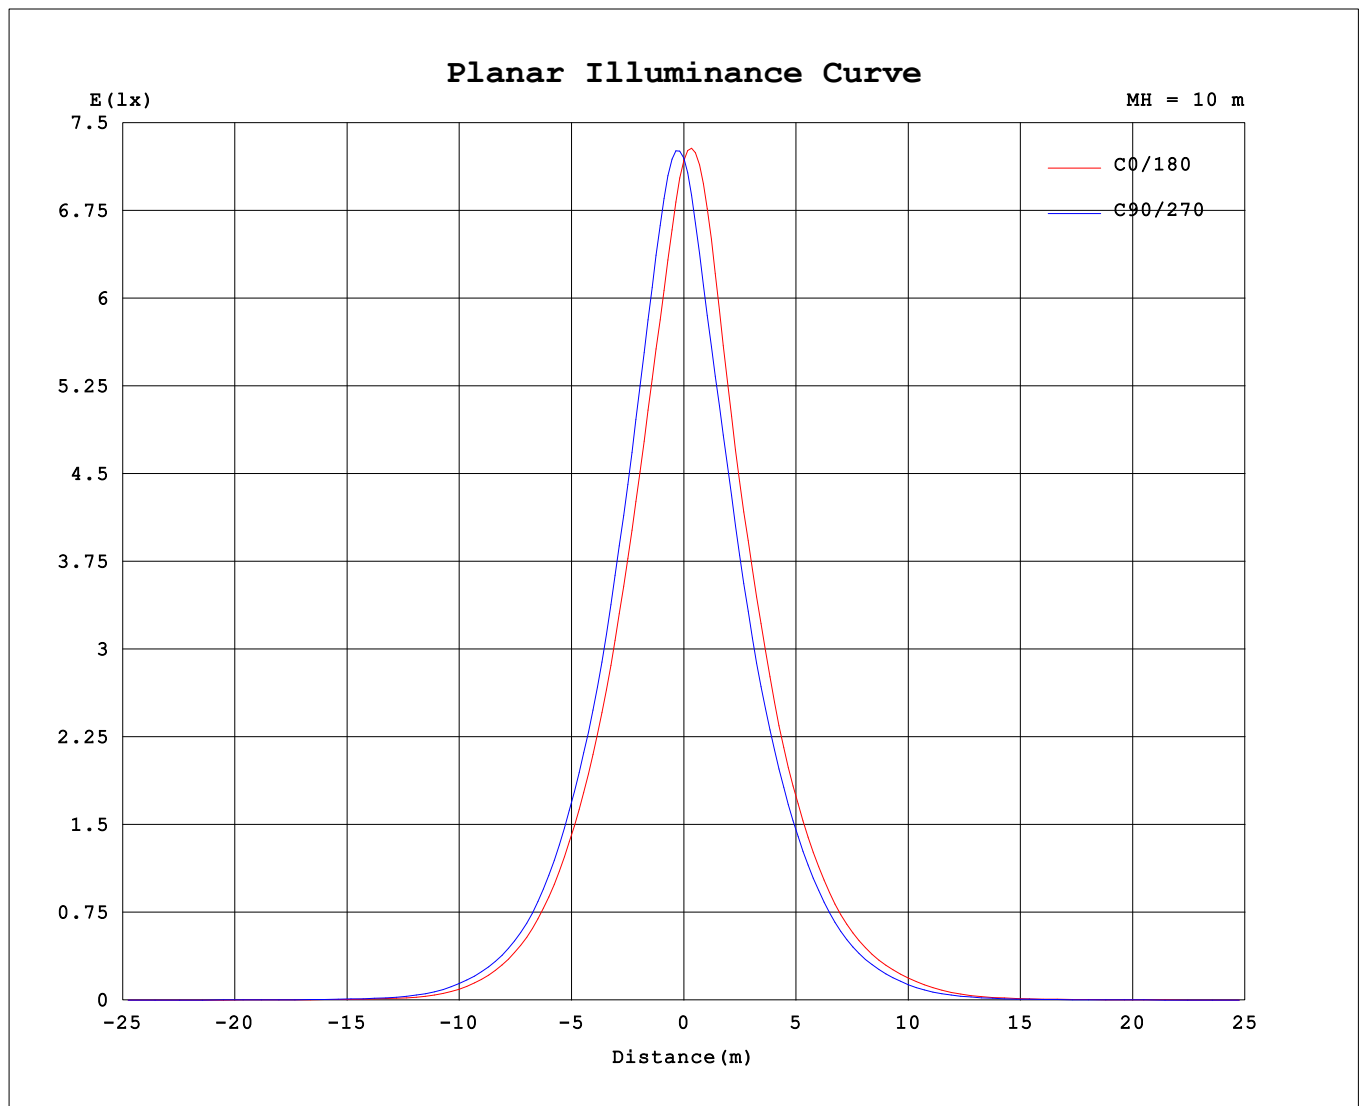

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: MEDIUM
 Temperature: 25°C
 Operators: YHX
 Test Date:

Checker: YHX

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.456
 Humidity: 55%
 Test Distance: 1.160m [K=1.0000]
 Remarks:

Assessor: ZQQ

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.15V I:0.0202A P:2.9599W PF:0.6369 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:412.785x1 lm		
NAME: GU10-9D 3W 4000K 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: KLITE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	90	180	270															
0	719	719	719	719															
5	614	692	707	617															
10	501	579	587	505															
15	393	459	464	395															
20	297	348	361	300															
25	219	261	268	224															
30	152	184	195	161															
35	98.1	120	133	107															
40	57.1	74.0	87.8	67.7															
45	27.1	40.3	53.8	37.7															
50	9.94	16.8	25.4	16.6															
55	5.12	7.11	10.2	7.04															
60	3.50	4.26	5.87	4.18															
65	2.77	3.11	4.10	3.11															
70	2.23	2.60	3.20	2.44															
75	1.81	2.16	2.58	1.95															
80	1.45	1.90	1.98	1.67															
85	1.06	1.51	1.45	1.38															
90	0.88	1.24	1.30	1.02															
95	0.82	0.87	0.90	0.81															
100	0.89	0.97	0.90	0.82															
105	0.91	1.03	0.87	0.86															
110	0.93	1.29	0.90	0.95															
115	1.07	1.43	1.01	0.99															
120	0.83	1.41	1.09	0.78															
125	0.76	0.98	1.05	0.77															
130	0.74	0.95	1.16	0.76															
135	0.65	0.90	0.84	0.70															
140	0.65	0.82	0.74	0.65															
145	0.66	0.81	0.71	0.66															
150	0.71	0.80	0.73	0.69															
155	0.75	0.81	0.76	0.73															
160	0.77	0.83	0.79	0.75															
165	0.71	0.80	0.76	0.69															
170	0.14	0.55	0.55	0.50															
175	0.08	0.09	0.14	0.14															
180	0.02	0.01	0.03	0.03															

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: MEDIUM
Temperature:25℃
Operators:YHX
Test Date:

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.456
Humidity:55%
Test Distance:1.160m [K=1.0000]
Remarks:

Checker: YHX

Assessor: ZQQ