


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:229.89V I:0.0481A P:10.417W PF:0.9429 Freq:49.99Hz Lamp Flux:780x1 lm		
NAME: SGS SKU No.: 0017440190	TYPE:	WEIGHT:
SPEC.: 10W Slim Downlight, 3CCT DIMMABLE IP20 In Front DIM.:	SERIAL No.: 10W 4000K	
MFR.: LIT by CARDI	SUR.: ϕ 0.121	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 74.88 lm/W			
MODEL		I _{max} (cd)	273.8	S/MH(C0/180)	1.23
NOMINAL POWER(W)	10	LOR(%)	100.0	S/MH(C90/270)	1.24
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	780.00	η UP,DN(C0-180)	0.1,52.8
NOMINAL FLUX(lm)	780	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,46.9
LAMPS INSIDE	1	η up (%)	0.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	230	η down (%)	99.8	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

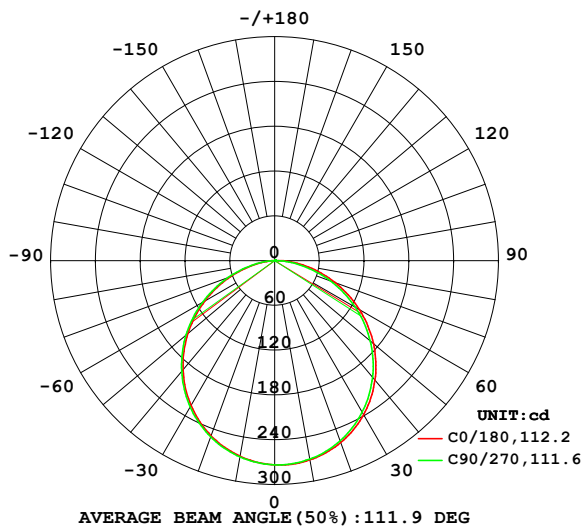

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

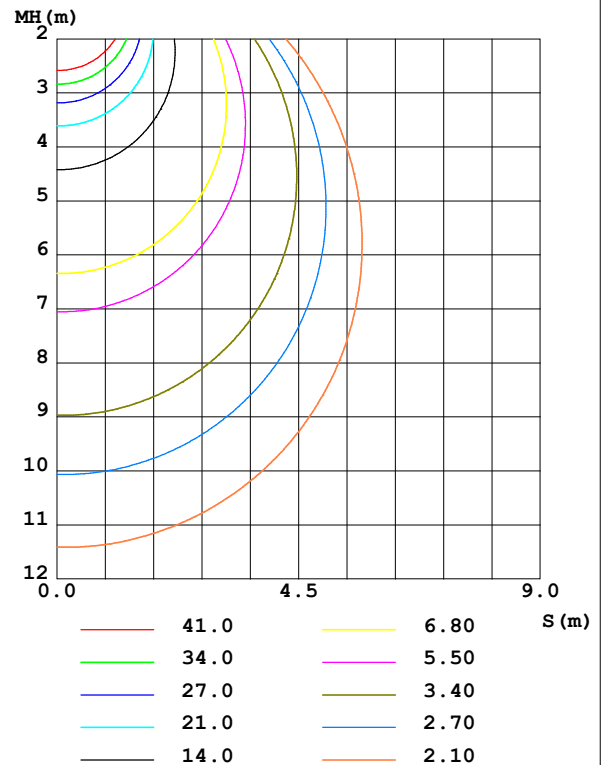

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-09-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C90	C180	C270					γ	Φ zone	Φ total	%lum, lamp
10	271.1	269.9	266.1	267.0					0- 10	25.87	25.87	3.32,3.32
20	259.3	256.8	249.5	251.1					10- 20	74.10	99.97	12.8,12.8
30	238.4	234.4	224.1	226.4					20- 30	112.2	212.2	27.2,27.2
40	209.2	204.2	191.0	193.9					30- 40	135.2	347.4	44.5,44.5
50	173.0	167.2	151.7	155.1					40- 50	139.8	487.2	62.5,62.5
60	131.2	124.9	108.0	111.6					50- 60	125.8	613.1	78.6,78.6
70	86.40	79.53	62.96	66.21					60- 70	95.38	708.4	90.8,90.8
80	42.42	35.05	21.70	24.54					70- 80	54.73	763.2	97.8,97.8
90	5.425	1.280	0.0050	0.0001					80- 90	14.99	778.2	99.8,99.8
100	0	0.0352	0.0955	0.0299					90-100	0.1885	778.4	99.8,99.8
110	0.0752	0.1306	0.2010	0.1305					100-110	0.0883	778.4	99.8,99.8
120	0.1755	0.2410	0.3163	0.2509					110-120	0.1885	778.6	99.8,99.8
130	0.2610	0.3363	0.4169	0.3562					120-130	0.2652	778.9	99.9,99.9
140	0.3513	0.4265	0.5171	0.4566					130-140	0.3039	779.2	99.9,99.9
150	0.4366	0.4918	0.6025	0.5420					140-150	0.3003	779.5	99.9,99.9
160	0.5219	0.5671	0.6827	0.6171					150-160	0.2574	779.8	100,100
170	0.6022	0.6424	0.7106	0.6724					160-170	0.1774	779.9	100,100
180	0.7027	0.7025	0.7077	0.6925					170-180	0.0641	780.0	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-09-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:229.89V I:0.0481A P:10.417W PF:0.9429 Freq:49.99Hz Lamp Flux:780x1 lm		
NAME: SGS SKU No.: 0017440190	TYPE:	WEIGHT:
SPEC.: 10W Slim Downlight, 3CCT DIMMABLE IP20 In Front DIM.:	SERIAL No.: 10W 4000K	
MFR.: LIT by CARDI	SUR.: $\phi 0.121$	Shielding Angle:

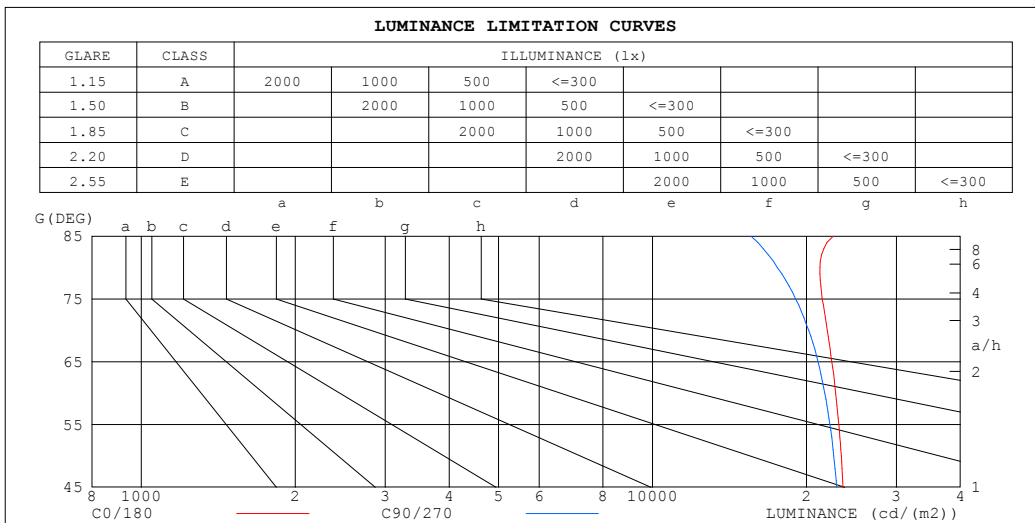

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	22543	15592
80	21241	17552
75	21485	19059
70	21965	20221
65	22435	21078
60	22815	21729
55	23146	22229
50	23398	22620
45	23589	22926


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-09-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:229.89V I:0.0481A P:10.417W PF:0.9429 Freq:49.99Hz Lamp Flux:780x1 lm		
NAME: SGS SKU No.: 0017440190	TYPE:	WEIGHT:
SPEC.: 10W Slim Downlight, 3CCT DIMMABLE IP20 In Front DIM.:	SERIAL No.: 10W 4000K	
MFR.: LIT by CARDI	SUR.: ϕ 0.121	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.99	.96	1.02	.98	.94	.97	.94	.91	.93	.91	.88	.90	.87	.86	.83
2.0	.90	.84	.78	.88	.82	.77	.85	.80	.75	.82	.77	.73	.78	.75	.72	.69
3.0	.79	.71	.65	.78	.70	.64	.75	.68	.63	.72	.66	.62	.69	.65	.61	.58
4.0	.70	.61	.55	.69	.61	.54	.66	.59	.53	.64	.58	.53	.62	.56	.52	.50
5.0	.63	.54	.47	.62	.53	.47	.59	.52	.46	.57	.51	.46	.56	.50	.45	.43
6.0	.56	.47	.41	.55	.47	.41	.54	.46	.40	.52	.45	.40	.50	.44	.40	.38
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.36	.47	.40	.35	.46	.40	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.45	.37	.32	.43	.37	.32	.42	.36	.31	.30
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.28	.27
10.0	.39	.32	.26	.39	.31	.26	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24

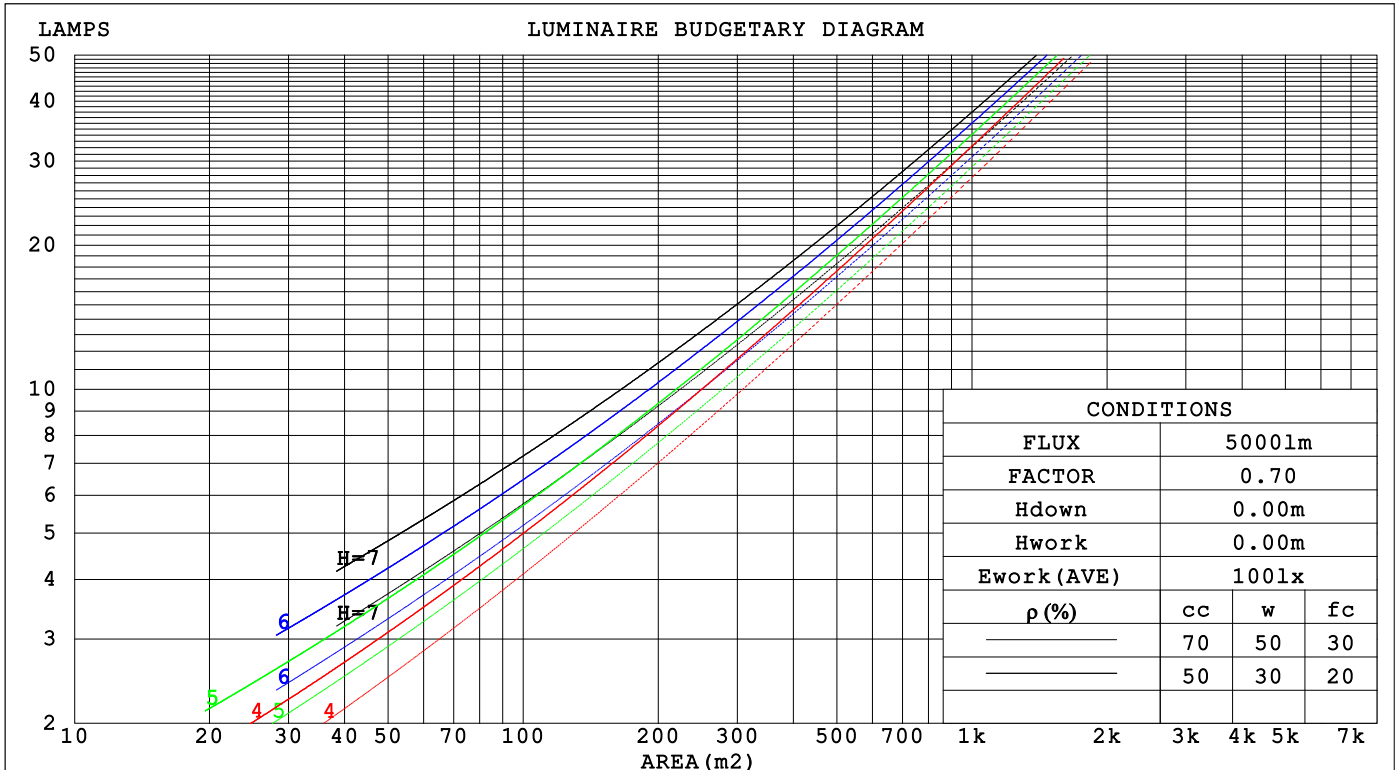

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-09-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:229.89V I:0.0481A P:10.417W PF:0.9429 Freq:49.99Hz Lamp Flux:780x1 lm		
NAME: SGS SKU No.: 0017440190	TYPE:	WEIGHT:
SPEC.: 10W Slim Downlight, 3CCT DIMMABLE IP20 In Front DIM.:	SERIAL No.: 10W 4000K	
MFR.: LIT by CARDI	SUR.: ϕ 0.121	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.310	.176	.056	.303	.173	.055	.290	.166	.053	.277	.160	.051	.266	.154	.050															
2.0	.292	.160	.049	.285	.157	.048	.274	.152	.047	.263	.147	.046	.253	.143	.045															
3.0	.270	.144	.043	.264	.142	.043	.254	.138	.042	.244	.134	.041	.235	.130	.040															
4.0	.249	.129	.038	.244	.128	.038	.235	.125	.037	.226	.122	.037	.218	.119	.036															
5.0	.230	.117	.034	.226	.116	.034	.218	.113	.033	.210	.111	.033	.203	.108	.033															
6.0	.214	.107	.031	.210	.106	.030	.202	.104	.030	.195	.102	.030	.189	.100	.030															
7.0	.199	.098	.028	.195	.097	.028	.189	.095	.027	.183	.094	.027	.177	.092	.027															
8.0	.186	.091	.026	.183	.090	.025	.177	.088	.025	.171	.087	.025	.166	.085	.025															
9.0	.174	.084	.023	.171	.083	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023															
10.0	.164	.078	.022	.161	.078	.022	.156	.077	.022	.152	.075	.021	.148	.074	.021															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.182	.158	.136	.156	.136	.117	.107	.093	.081	.061	.054	.047	.020	.017	.015	
2.0	.174	.134	.100	.149	.115	.086	.102	.080	.060	.059	.046	.035	.019	.015	.011	
3.0	.166	.116	.076	.143	.100	.066	.098	.070	.046	.057	.041	.027	.018	.013	.009	
4.0	.159	.103	.060	.136	.089	.052	.094	.062	.037	.054	.036	.022	.017	.012	.007	
5.0	.151	.092	.049	.130	.080	.043	.089	.056	.030	.052	.033	.018	.017	.011	.006	
6.0	.144	.084	.041	.124	.073	.036	.085	.051	.025	.050	.030	.015	.016	.010	.005	
7.0	.137	.077	.035	.118	.067	.031	.082	.047	.022	.047	.028	.013	.015	.009	.004	
8.0	.131	.071	.031	.113	.062	.027	.078	.043	.019	.045	.026	.011	.015	.008	.004	
9.0	.125	.066	.027	.107	.058	.024	.074	.041	.017	.043	.024	.010	.014	.008	.003	
10.0	.119	.062	.024	.103	.054	.021	.071	.038	.015	.042	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-09-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:229.89V I:0.0481A P:10.417W PF:0.9429 Freq:49.99Hz Lamp Flux:780x1 lm											
NAME: SGS SKU No.: 0017440190					TYPE:			WEIGHT:			
SPEC.: 10W Slim Downlight, 3CCT DIMMABLE IP20 In Front					DIM.:			SERIAL No.: 10W 4000K			
MFR.: LIT by CARDI					SUR.: ϕ 0.121			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	2H	24.9	26.4	25.2	26.6	26.8	24.7	26.2	25.0	26.4	26.6
	3H	26.6	28.0	26.9	28.2	28.4	26.3	27.7	26.6	27.9	28.2
	4H	27.3	28.6	27.6	28.9	29.1	26.9	28.3	27.2	28.5	28.8
	6H	27.9	29.1	28.2	29.4	29.7	27.4	28.7	27.7	28.9	29.2
	8H	28.1	29.3	28.4	29.6	29.9	27.6	28.8	27.9	29.1	29.4
	12H	28.3	29.4	28.6	29.7	30.1	27.7	28.8	28.0	29.1	29.4
4H	2H	25.5	26.8	25.8	27.1	27.4	25.4	26.7	25.7	27.0	27.2
	3H	27.4	28.5	27.7	28.8	29.1	27.1	28.3	27.5	28.6	28.9
	4H	28.2	29.3	28.6	29.6	29.9	27.9	29.0	28.3	29.3	29.7
	6H	28.9	29.9	29.4	30.3	30.6	28.5	29.5	28.9	29.8	30.2
	8H	29.2	30.1	29.7	30.5	30.9	28.8	29.6	29.2	30.0	30.4
	12H	29.5	30.3	29.9	30.7	31.1	28.9	29.7	29.3	30.1	30.5
8H	4H	28.5	29.4	28.9	29.8	30.2	28.2	29.1	28.7	29.5	29.9
	6H	29.4	30.1	29.9	30.6	31.0	29.0	29.8	29.5	30.2	30.6
	8H	29.8	30.5	30.3	30.9	31.4	29.4	30.0	29.8	30.4	30.9
	12H	30.2	30.7	30.7	31.2	31.7	29.6	30.2	30.1	30.6	31.1
12H	4H	28.5	29.3	29.0	29.7	30.1	28.3	29.1	28.7	29.5	29.9
	6H	29.5	30.1	29.9	30.6	31.0	29.1	29.8	29.6	30.2	30.7
	8H	29.9	30.5	30.4	31.0	31.4	29.5	30.1	30.0	30.5	31.0
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.1 / - 0.3					+ 0.1 / - 0.3					

CIE Pub.117, 780.0 lm Total Lamp Luminous Flux Correct ($8\log(F/F_0) = -0.9$)
Area: 0.0115 m²

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-09-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:229.89V I:0.0481A P:10.417W PF:0.9429 Freq:49.99Hz Lamp Flux:780x1 lm		
NAME: SGS SKU No.: 0017440190	TYPE:	WEIGHT:
SPEC.: 10W Slim Downlight, 3CCT DIMMABLE IP20 In Front DIM.:		SERIAL No.: 10W 4000K
MFR.: LIT by CARDI	SUR.: $\phi 0.121$	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	57	46	39	57	46	39	56	45	39	32
0.80	68	56	48	66	55	48	65	55	48	41
1.00	76	65	57	75	64	57	72	66	57	49
1.25	83	73	65	82	72	65	79	70	64	57
1.50	88	78	71	86	77	71	83	75	70	62
2.00	95	86	80	93	85	79	89	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	86	78
4.00	106	100	96	104	99	94	99	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-09-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity: 65.0%
Test Distance: 8.800m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:229.89V I:0.0481A P:10.417W PF:0.9429 Freq:49.99Hz Lamp Flux:780x1 lm		
NAME: SGS SKU No.: 0017440190	TYPE:	WEIGHT:
SPEC.: 10W Slim Downlight, 3CCT DIMMABLE IP20 In Front DIM.:		SERIAL No.: 10W 4000K
MFR.: LIT by CARDI	SUR.: ϕ 0.121	Shielding Angle:

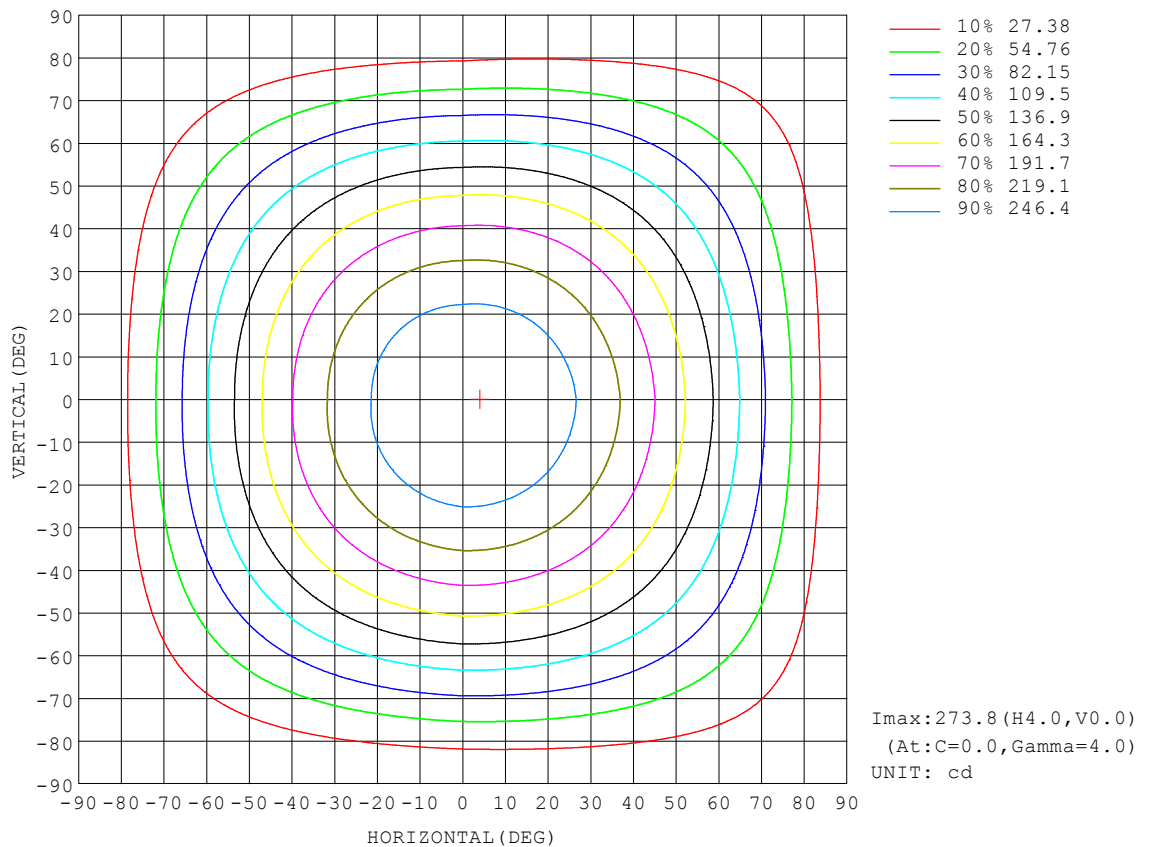


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-09-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

AAI Figure

Test:U:229.89V I:0.0481A P:10.417W PF:0.9429 Freq:49.99Hz Lamp Flux:780x1 lm		
NAME: SGS SKU No.: 0017440190	TYPE:	WEIGHT:
SPEC.: 10W Slim Downlight, 3CCT DIMMABLE IP20 In Front DIM.:	SERIAL No.: 10W 4000K	
MFR.: LIT by CARDI	SUR.: ϕ 0.121	Shielding Angle:

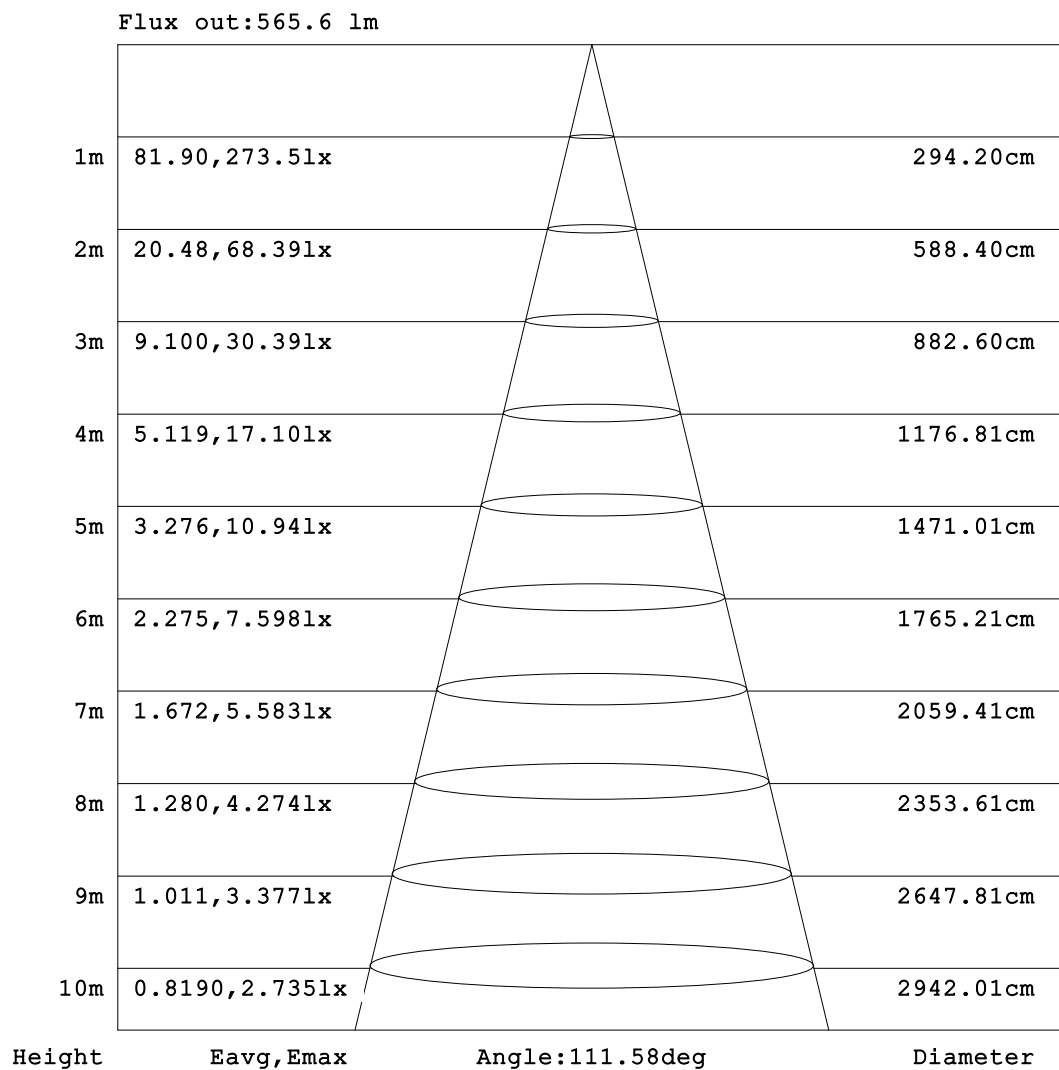


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-09-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:229.89V I:0.0481A P:10.417W PF:0.9429 Freq:49.99Hz Lamp Flux:780x1 lm		
NAME: SGS SKU No.: 0017440190	TYPE:	WEIGHT:
SPEC.: 10W Slim Downlight, 3CCT DIMMABLE IP20 In Front DIM.:	SERIAL No.: 10W 4000K	
MFR.: LIT by CARDI	SUR.: ϕ 0.121	Shielding Angle:

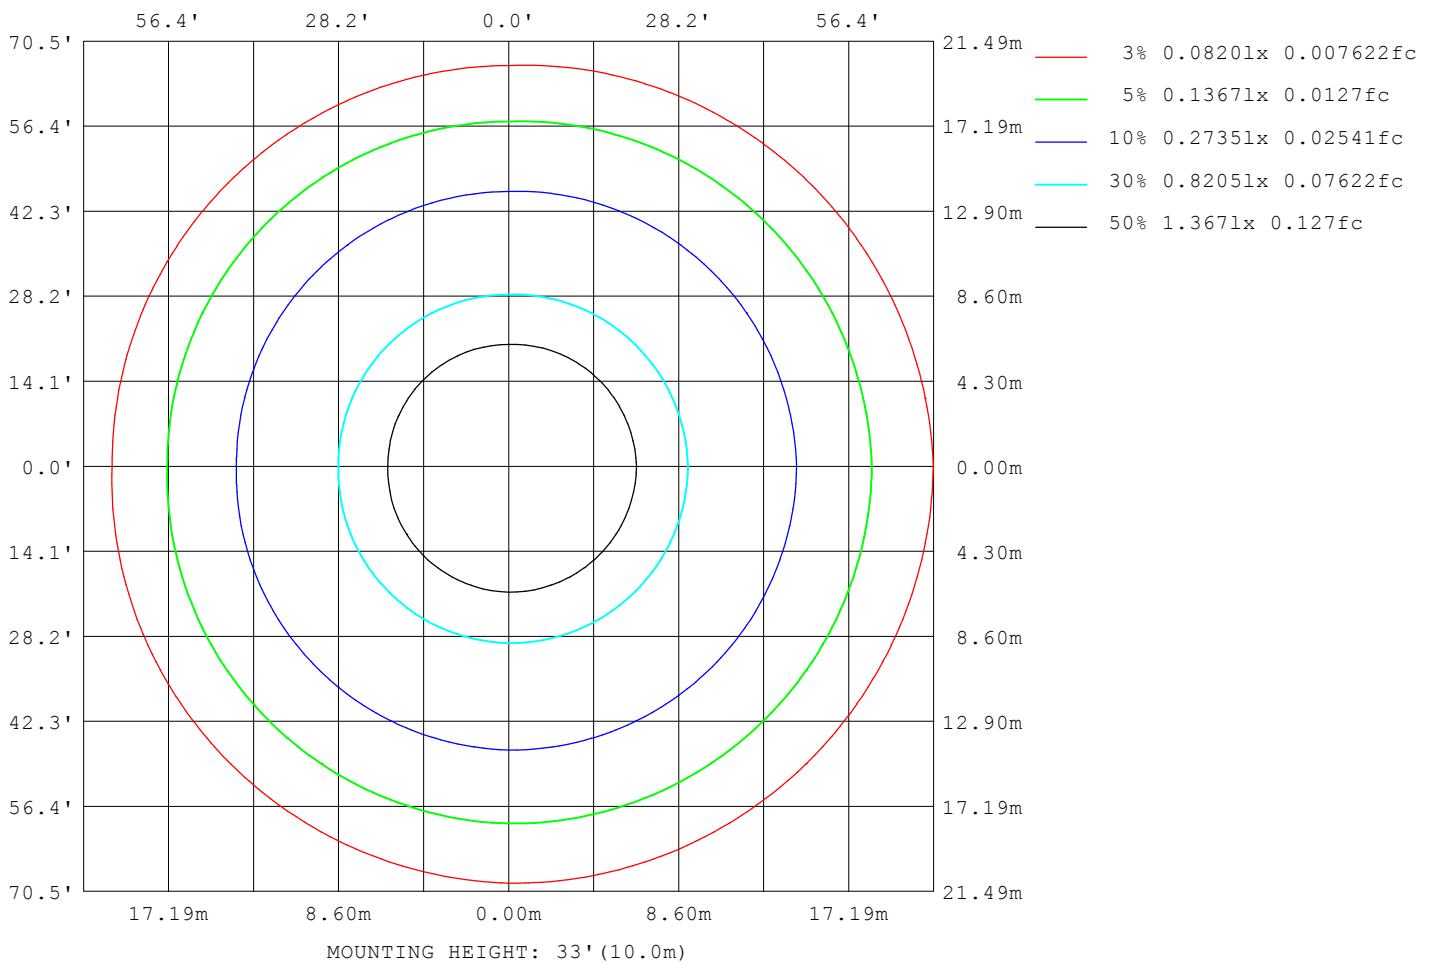

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-09-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:229.89V I:0.0481A P:10.417W PF:0.9429 Freq:49.99Hz Lamp Flux:780x1 lm		
NAME: SGS SKU No.: 0017440190	TYPE:	WEIGHT:
SPEC.: 10W Slim Downlight, 3CCT DIMMABLE IP20 In Front DIM.:		SERIAL No.: 10W 4000K
MFR.: LIT by CARDI	SUR.: ϕ 0.121	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	20003
L_0~180 (75) av	17704
L_0~180 (85) av	13581
L_90~270 (65) av	19681
L_90~270 (75) av	17008
L_90~270 (85) av	11410
L_45 (65) av	19649
L_45 (75) av	17032
L_45 (85) av	11664

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-09-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

Planar Illuminance Curve

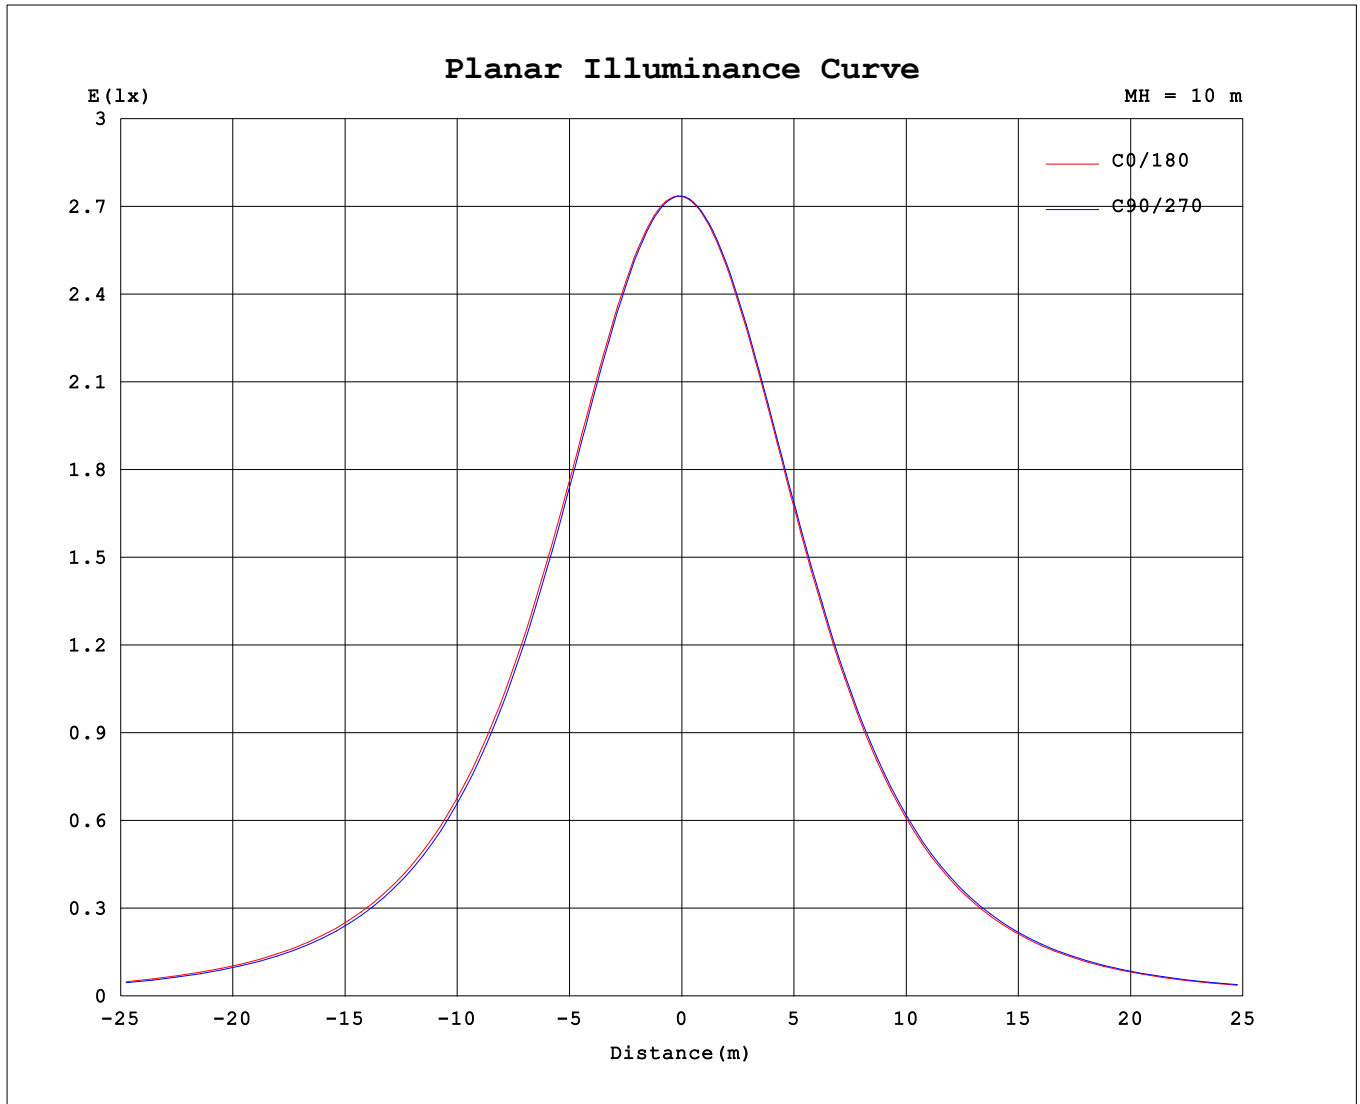

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2024-09-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity: 65.0%
 Test Distance: 8.800m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:229.89V I:0.0481A P:10.417W PF:0.9429 Freq:49.99Hz Lamp Flux:780x1 lm		
NAME: SGS SKU No.: 0017440190	TYPE:	WEIGHT:
SPEC.: 10W Slim Downlight, 3CCT DIMMABLE IP20 In Front DIM.:		SERIAL No.: 10W 4000K
MFR.: LIT by CARDI	SUR.: ϕ 0.121	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	90	180	270															
0	274	274	274	274															
5	274	273	271	271															
10	271	270	266	267															
15	266	265	259	260															
20	259	257	250	251															
25	250	247	238	240															
30	238	234	224	226															
35	225	220	208	211															
40	209	204	191	194															
45	192	186	172	175															
50	173	167	152	155															
55	153	147	130	134															
60	131	125	108	112															
65	109	102	85.4	88.9															
70	86.4	79.5	63.0	66.2															
75	64.0	56.7	41.4	44.5															
80	42.4	35.0	21.7	24.5															
85	22.6	15.6	4.63	7.25															
90	5.43	1.28	0.01	0.00															
95	0.00	0.00	0.05	0.00															
100	0.00	0.04	0.10	0.03															
105	0.03	0.08	0.15	0.08															
110	0.08	0.13	0.20	0.13															
115	0.12	0.19	0.27	0.19															
120	0.18	0.24	0.32	0.25															
125	0.23	0.29	0.37	0.31															
130	0.26	0.34	0.42	0.36															
135	0.31	0.38	0.47	0.41															
140	0.35	0.43	0.52	0.46															
145	0.39	0.46	0.56	0.51															
150	0.44	0.49	0.60	0.54															
155	0.48	0.54	0.65	0.58															
160	0.52	0.57	0.68	0.62															
165	0.57	0.60	0.71	0.65															
170	0.60	0.64	0.71	0.67															
175	0.64	0.68	0.71	0.69															
180	0.70	0.70	0.71	0.69															

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-09-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks: