
LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:229.89V I:0.0395A P:6.6704W PF:0.7342 Freq:49.99Hz Lamp Flux:820.31x1 lm		
NAME: 0019590108	TYPE:	WEIGHT:
SPEC.: 0019590108 3713202 7W 2700K 806lm	DIM.:	SERIAL No.:1
MFR.: /	SUR.:	Shielding Angle:


DATA OF LAMP		PHOTOMETRIC DATA Eff: 122.98 lm/W			
MODEL	0019590108	Imax(cd)	122.2	S/MH(C0/180)	3.47
NOMINAL POWER(W)	7	LOR(%)	100.0	S/MH(C90/270)	3.59
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	806	η UP,DN(C0-180)	29.4,29.5
NOMINAL FLUX(lm)	806	CIE CLASS	DIFFUSE	η UP,DN(C180-360)	19.5,21.6
LAMPS INSIDE	1	η up(%)	48.9	CIBSE SHR NOM	2.00
TEST VOLTAGE(V)		η down(%)	51.1	CIBSE SHR MAX	2.00

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

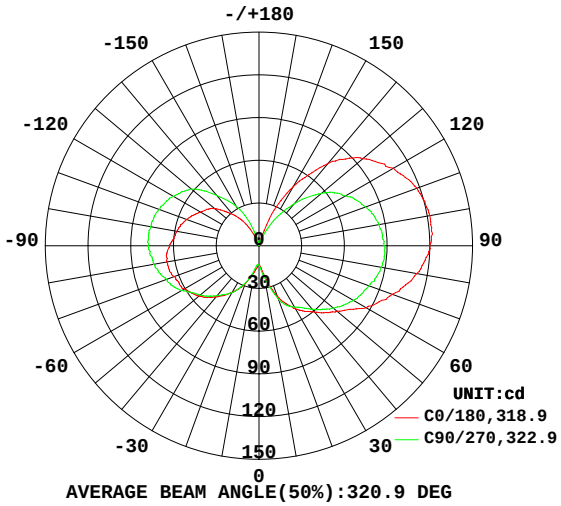

AVERAGE BEAM ANGLE(50%):320.9 DEG

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

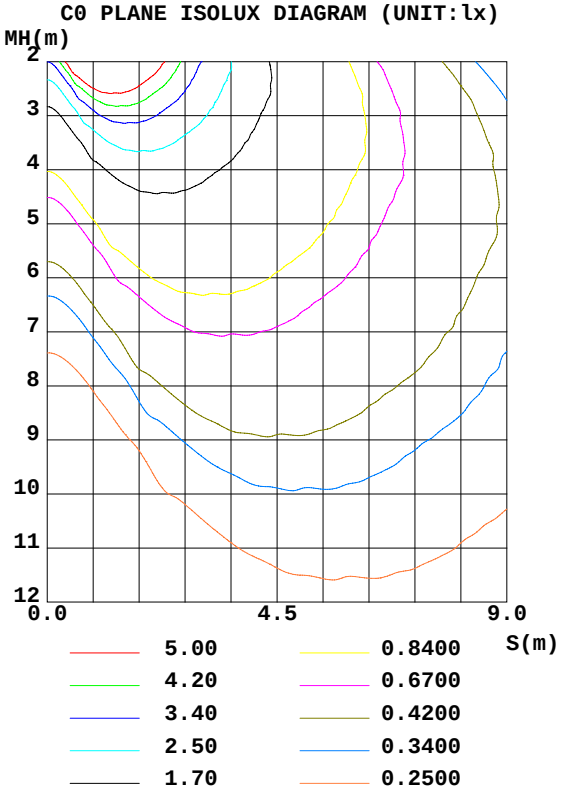

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:XCJ
Test Date:2024-12-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.6
Humidity:65.0%
Test Distance:9.313m [K=1.0000]
Remarks:

Checker: XCJ

Assessor: XZY

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C90	C180	C270					γ	Φ zone	Φ total	%lum,lamp
10	21.00	22.73	18.57	16.53					0- 10	1.603	1.603	0.20,0.20
20	37.61	39.78	28.39	27.70					10- 20	7.667	9.270	1.13,1.13
30	51.15	49.87	37.76	37.93					20- 30	18.27	27.54	3.36,3.36
40	60.87	58.21	46.79	45.97					30- 40	30.54	58.08	7.08,7.08
50	71.47	68.12	55.02	54.09					40- 50	44.82	102.9	12.5,12.5
60	87.09	76.41	60.48	62.88					50- 60	59.94	162.8	19.9,19.9
70	99.83	82.27	63.34	69.09					60- 70	74.94	237.8	29,29
80	112.6	87.09	65.75	75.16					70- 80	87.06	324.8	39.6,39.6
90	119.8	87.76	62.86	77.84					80- 90	94.41	419.2	51.1,51.1
100	121.9	85.66	58.62	77.29					90-100	94.54	513.8	62.6,62.6
110	118.2	79.70	54.15	74.55					100-110	88.91	602.7	73.5,73.5
120	109.0	70.12	47.24	69.34					110-120	77.51	680.2	82.9,82.9
130	95.16	57.14	40.63	62.00					120-130	62.17	742.4	90.5,90.5
140	75.50	38.46	28.64	46.13					130-140	43.43	785.8	95.8,95.8
150	47.68	20.05	16.34	31.92					140-150	24.15	810.0	98.7,98.7
160	15.48	5.418	4.038	12.97					150-160	9.142	819.1	99.9,99.9
170	0.9708	0.9305	0.9511	1.145					160-170	1.114	820.2	100,100
180	0.8758	0.9179	0.8821	0.9368					170-180	0.0897	820.3	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:XCJ
Test Date:2024-12-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.6
Humidity:65.0%
Test Distance:9.313m [K=1.0000]
Remarks:

Checker: XCJ


Assessor: XZY

LUMINANCE LIMITATION CURVES

Test:U:229.89V I:0.0395A P:6.6704W PF:0.7342 Freq:49.99Hz Lamp Flux:820.31x1 lm		
NAME: 0019590108	**TYPE:**	**WEIGHT:**
SPEC.: 0019590108 3713202 7W 2700K 806lm	**DIM.:**	**SERIAL No.:1**
MFR.: /	**SUR.:**	**Shielding Angle:**

LUMINANCE LIMITATION CURVES

GLARE	CLASS	ILLUMINANCE (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300
		a	b	c	d	e	f	g	h

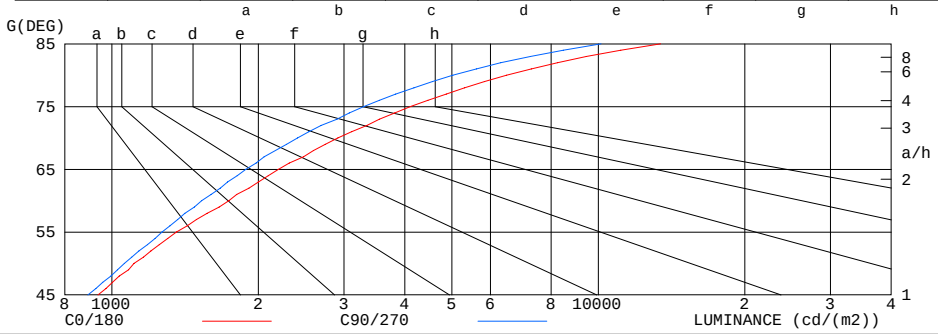

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	13425	10133
80	6477	5021
75	4109	3296
70	2916	2408
65	2200	1886
60	1740	1530
55	1357	1268
50	1111	1061
45	936	892

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:XCJ
Test Date:2024-12-26

Checker: XCJ

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.6
Humidity:65.0%
Test Distance:9.313m [K=1.0000]
Remarks:

Assessor: XZY


CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:229.89V I:0.0395A P:6.6704W PF:0.7342 Freq:49.99Hz Lamp Flux:820.31x1 lm		
NAME: 0019590108	TYPE:	WEIGHT:
SPEC.: 0019590108 3713202 7W 2700K 806lm	DIM.:	SERIAL No.:1
MFR.: /	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.07	1.07	1.07	.99	.99	.99	.84	.84	.84	.70	.70	.70	.57	.57	.57	.51
1.0	.85	.79	.74	.78	.73	.68	.65	.61	.57	.53	.49	.46	.41	.39	.37	.31
2.0	.71	.63	.56	.65	.58	.51	.54	.48	.43	.43	.38	.34	.33	.30	.27	.22
3.0	.61	.51	.44	.56	.47	.40	.46	.39	.33	.36	.31	.27	.28	.24	.20	.16
4.0	.53	.43	.36	.48	.39	.33	.39	.32	.27	.31	.26	.21	.24	.19	.16	.12
5.0	.46	.37	.29	.42	.34	.27	.35	.28	.22	.27	.22	.18	.21	.16	.13	.10
6.0	.41	.32	.25	.37	.29	.23	.31	.24	.19	.24	.19	.15	.18	.14	.11	.08
7.0	.37	.28	.21	.33	.25	.19	.27	.21	.16	.22	.17	.13	.17	.12	.09	.06
8.0	.33	.24	.18	.30	.22	.17	.25	.18	.14	.20	.15	.11	.15	.11	.08	.05
9.0	.30	.22	.16	.27	.20	.15	.23	.16	.12	.18	.13	.09	.14	.10	.07	.05
10.0	.27	.19	.14	.25	.18	.13	.21	.15	.11	.17	.12	.08	.13	.09	.06	.04

LAMPS

LUMINAIRE BUDGETARY DIAGRAM

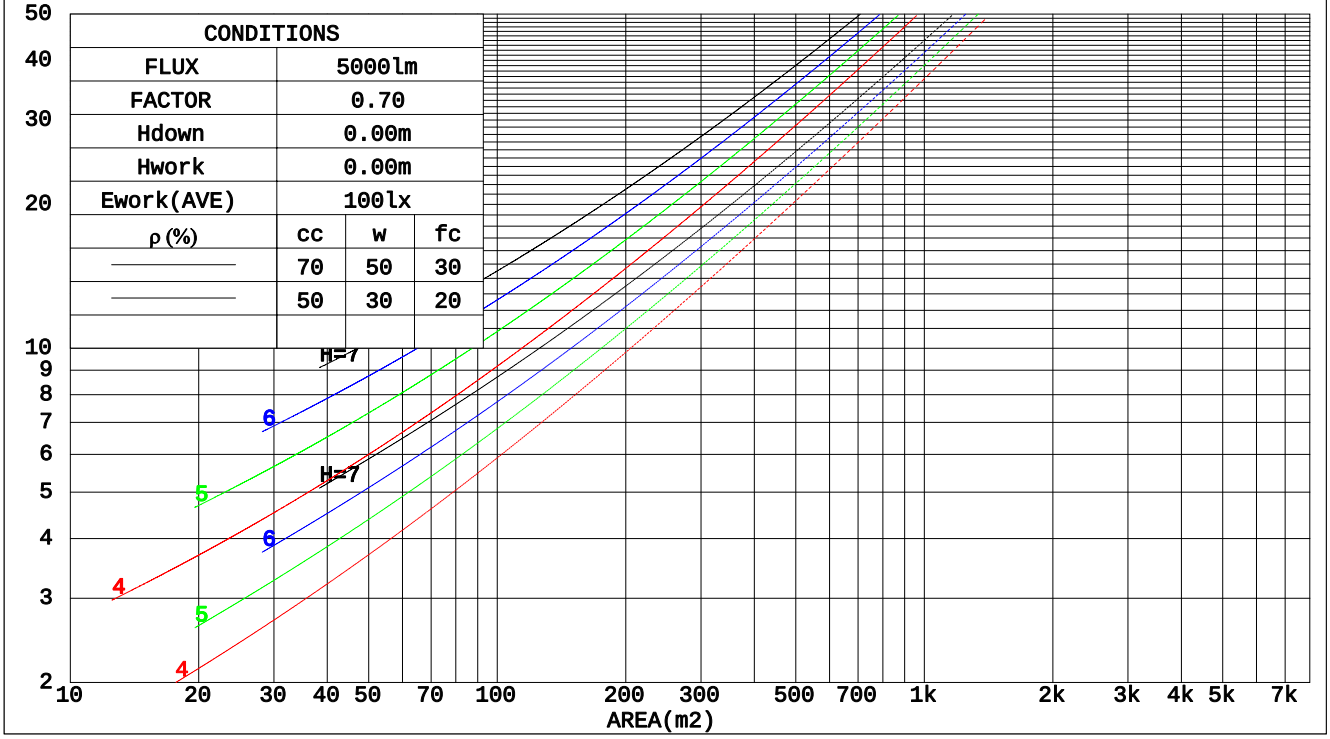

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:XCJ
Test Date:2024-12-26

Checker: XCJ

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.6
Humidity:65.0%
Test Distance:9.313m [K=1.0000]
Remarks:

Assessor: XZY

WEC AND CCEC

Test:U:229.89V I:0.0395A P:6.6704W PF:0.7342 Freq:49.99Hz Lamp Flux:820.31x1 lm		
NAME: 0019590108	TYPE:	WEIGHT:
SPEC.: 0019590108 3713202 7W 2700K 806lm	DIM.:	SERIAL No.:1
MFR.: /	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coeffcients(WEC)									
0.0																
1.0	.440	.250	.079	.418	.238	.076	.376	.216	.069	.338	.195	.063	.303	.175	.057	
2.0	.361	.198	.061	.341	.188	.058	.303	.168	.052	.268	.150	.047	.235	.133	.042	
3.0	.312	.166	.050	.293	.157	.047	.259	.140	.043	.226	.124	.038	.197	.109	.034	
4.0	.276	.143	.042	.259	.135	.040	.227	.120	.036	.197	.106	.032	.170	.092	.028	
5.0	.248	.126	.037	.232	.119	.035	.203	.106	.031	.175	.093	.028	.150	.080	.024	
6.0	.225	.113	.032	.210	.106	.031	.183	.094	.027	.158	.082	.024	.134	.071	.021	
7.0	.206	.102	.029	.193	.096	.027	.168	.085	.024	.144	.074	.021	.122	.063	.019	
8.0	.190	.093	.026	.178	.087	.025	.154	.077	.022	.132	.067	.019	.112	.057	.017	
9.0	.176	.085	.024	.165	.080	.023	.143	.071	.020	.123	.061	.018	.103	.053	.015	
10.0	.164	.079	.022	.154	.074	.021	.133	.065	.018	.114	.057	.016	.096	.048	.014	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.563	.563	.563	.481	.481	.481	.328	.328	.328	.189	.189	.189	.060	.060	.060	
1.0	.565	.531	.500	.483	.455	.430	.331	.313	.297	.190	.181	.173	.061	.058	.056	
2.0	.560	.510	.468	.479	.439	.404	.328	.304	.282	.189	.177	.165	.061	.057	.054	
3.0	.553	.495	.449	.474	.427	.389	.325	.296	.273	.188	.173	.161	.060	.056	.053	
4.0	.545	.483	.436	.468	.418	.379	.322	.291	.267	.186	.170	.158	.060	.056	.052	
5.0	.538	.474	.428	.462	.410	.372	.318	.287	.263	.184	.168	.156	.059	.055	.051	
6.0	.530	.467	.422	.456	.405	.367	.314	.283	.260	.182	.167	.154	.059	.054	.051	
7.0	.523	.461	.417	.450	.400	.364	.311	.280	.258	.181	.165	.153	.058	.054	.051	
8.0	.517	.456	.414	.445	.395	.361	.308	.278	.256	.179	.164	.153	.058	.054	.051	
9.0	.510	.451	.412	.440	.392	.359	.305	.275	.255	.177	.163	.152	.057	.053	.050	
10.0	.505	.448	.410	.435	.389	.357	.302	.273	.254	.176	.162	.152	.057	.053	.050	

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:XCJ
Test Date:2024-12-26

Checker: XCJ

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.6
Humidity:65.0%
Test Distance:9.313m [K=1.0000]
Remarks:

Assessor: XZY

UGR(Unified Glare Rating) Table

Test:U:229.89V I:0.0395A P:6.6704W PF:0.7342 Freq:49.99Hz Lamp Flux:820.31x1 lm		
NAME: 0019590108	TYPE:	WEIGHT:
SPEC.: 0019590108 3713202 7W 2700K 806lm	DIM.:	SERIAL No.:1
MFR.: /	SUR.:	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	12.3	13.4	13.1	14.3	15.5	11.8	12.9	12.7	13.8	15.0
3H	16.2	17.2	17.1	18.1	19.3	15.4	16.4	16.3	17.3	18.5
4H	18.4	19.4	19.3	20.3	21.5	17.4	18.4	18.3	19.3	20.5
6H	20.9	21.8	21.8	22.7	23.9	19.6	20.5	20.5	21.5	22.7
8H	22.2	23.1	23.1	24.0	25.3	20.8	21.7	21.7	22.6	23.9
12H	23.7	24.5	24.6	25.5	26.7	22.2	23.0	23.1	24.0	25.2
4H 2H	13.4	14.3	14.3	15.3	16.5	13.1	14.0	14.0	15.0	16.2
3H	17.3	18.2	18.3	19.1	20.4	16.7	17.6	17.6	18.5	19.7
4H	19.6	20.4	20.6	21.4	22.7	18.8	19.6	19.8	20.6	21.8
6H	22.2	22.9	23.2	23.9	25.2	21.1	21.8	22.1	22.8	24.1
8H	23.6	24.3	24.6	25.3	26.6	22.4	23.1	23.4	24.1	25.4
12H	25.2	25.9	26.2	26.8	28.2	23.9	24.5	24.8	25.5	26.8
8H 4H	20.4	21.0	21.3	22.0	23.3	19.7	20.4	20.7	21.4	22.7
6H	23.2	23.7	24.2	24.7	26.1	22.3	22.9	23.3	23.9	25.2
8H	24.8	25.3	25.8	26.3	27.6	23.8	24.3	24.7	25.3	26.6
12H	26.6	27.0	27.6	28.1	29.4	25.4	25.8	26.4	26.9	28.2
12H 4H	20.5	21.2	21.5	22.2	23.5	20.0	20.6	21.0	21.6	23.0
6H	23.5	24.0	24.5	25.0	26.3	22.7	23.2	23.7	24.2	25.6
8H	25.2	25.6	26.2	26.6	28.0	24.3	24.7	25.3	25.8	27.1
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.3 / - 0.4					+ 0.3 / - 0.4				

CIE Pub.117, 820.3 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.7)

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:XCJ
Test Date:2024-12-26

Checker: XCJ

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.6
Humidity:65.0%
Test Distance:9.313m [K=1.0000]
Remarks:

Assessor: XZY

UTILIZATION FACTORS TABLE

Test:U:229.89V I:0.0395A P:6.6704W PF:0.7342 Freq:49.99Hz Lamp Flux:820.31x1 lm		
NAME: 0019590108	TYPE:	WEIGHT:
SPEC.: 0019590108 3713202 7W 2700K 806lm	DIM.:	SERIAL No.:1
MFR.: /	SUR.:	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	34	21	14	32	20	13	29	18	12	5
0.80	43	28	19	40	27	19	35	24	17	7
1.00	50	35	25	46	33	24	40	31	21	10
1.25	56	41	32	52	39	30	45	34	26	13
1.50	62	47	37	57	44	35	49	38	31	15
2.00	70	56	46	64	52	43	55	45	37	19
2.50	75	62	52	69	58	49	59	50	42	22
3.00	79	67	58	73	62	54	62	53	47	25
4.00	85	74	66	78	69	61	66	59	53	29
5.00	88	79	71	81	73	66	68	62	57	32
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004				Suspended					SHRNOM = 1.25	

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:XCJ
Test Date:2024-12-26


γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.6
Humidity:65.0%
Test Distance:9.313m [K=1.0000]
Remarks:

Checker: XCJ

Assessor: XZY

ISOCANDELA DIAGRAM

Test:U:229.89V I:0.0395A P:6.6704W PF:0.7342 Freq:49.99Hz Lamp Flux:820.31x1 lm		
NAME: 0019590108	**TYPE:**	**WEIGHT:**
SPEC.: 0019590108 3713202 7W 2700K 806lm	**DIM.:**	**SERIAL No.:1**
MFR.: /	**SUR.:**	**Shielding Angle:**

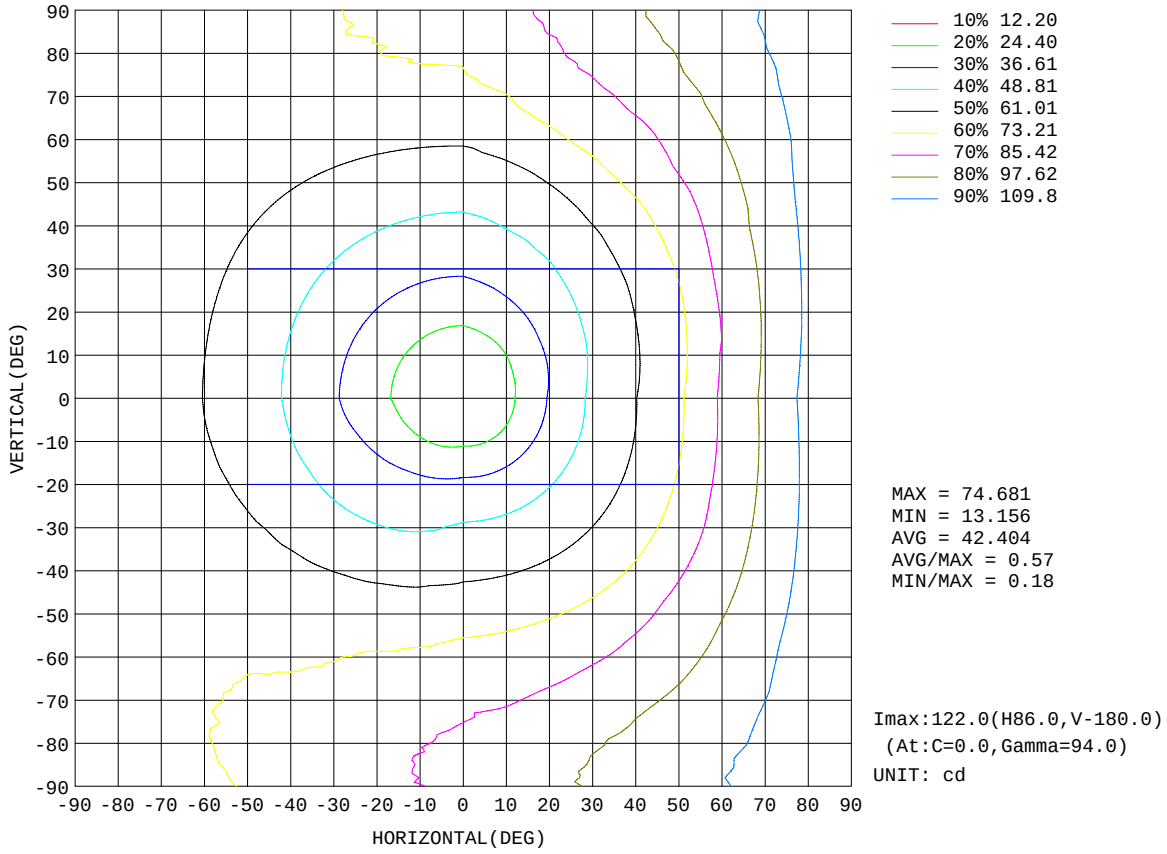

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:XCJ
Test Date:2024-12-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.6
Humidity:65.0%
Test Distance:9.313m [K=1.0000]
Remarks:


Checker: XCJ

Assessor: XZY

AAI Figure

Test:U:229.89V I:0.0395A P:6.6704W PF:0.7342 Freq:49.99Hz Lamp Flux:820.31x1 lm		
NAME: 0019590108	TYPE:	WEIGHT:
SPEC.: 0019590108 3713202 7W 2700K 806lm	DIM.:	SERIAL No.:1
MFR.: /	SUR.:	Shielding Angle:

Flux out:78.61 lm

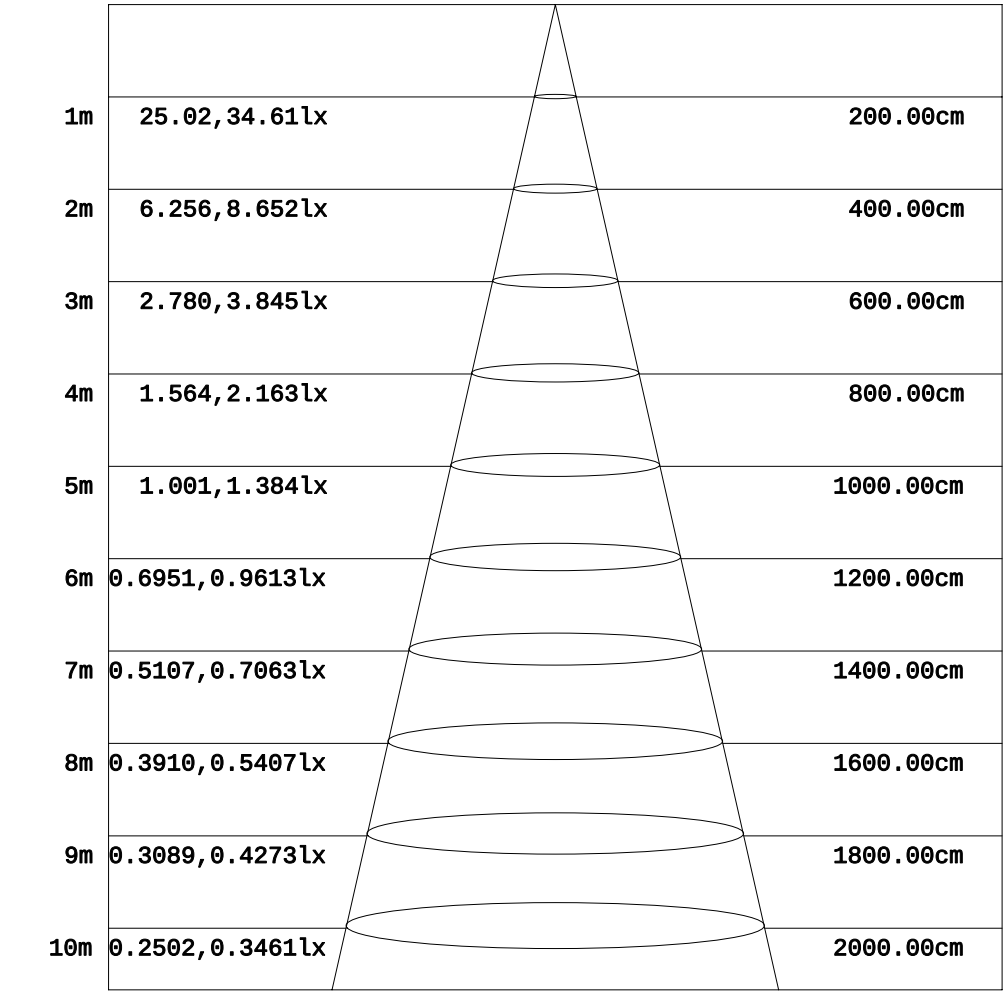

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:XCJ
Test Date:2024-12-26


Checker: XCJ

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.6
Humidity:65.0%
Test Distance:9.313m [K=1.0000]
Remarks:

Assessor: XZY

ISOLUX DIAGRAM

Test:U:229.89V I:0.0395A P:6.6704W PF:0.7342 Freq:49.99Hz Lamp Flux:820.31x1 lm		
NAME: 0019590108	**TYPE:**	**WEIGHT:**
SPEC.: 0019590108 3713202 7W 2700K 806lm	**DIM.:**	**SERIAL No.:1**
MFR.: /	**SUR.:**	**Shielding Angle:**

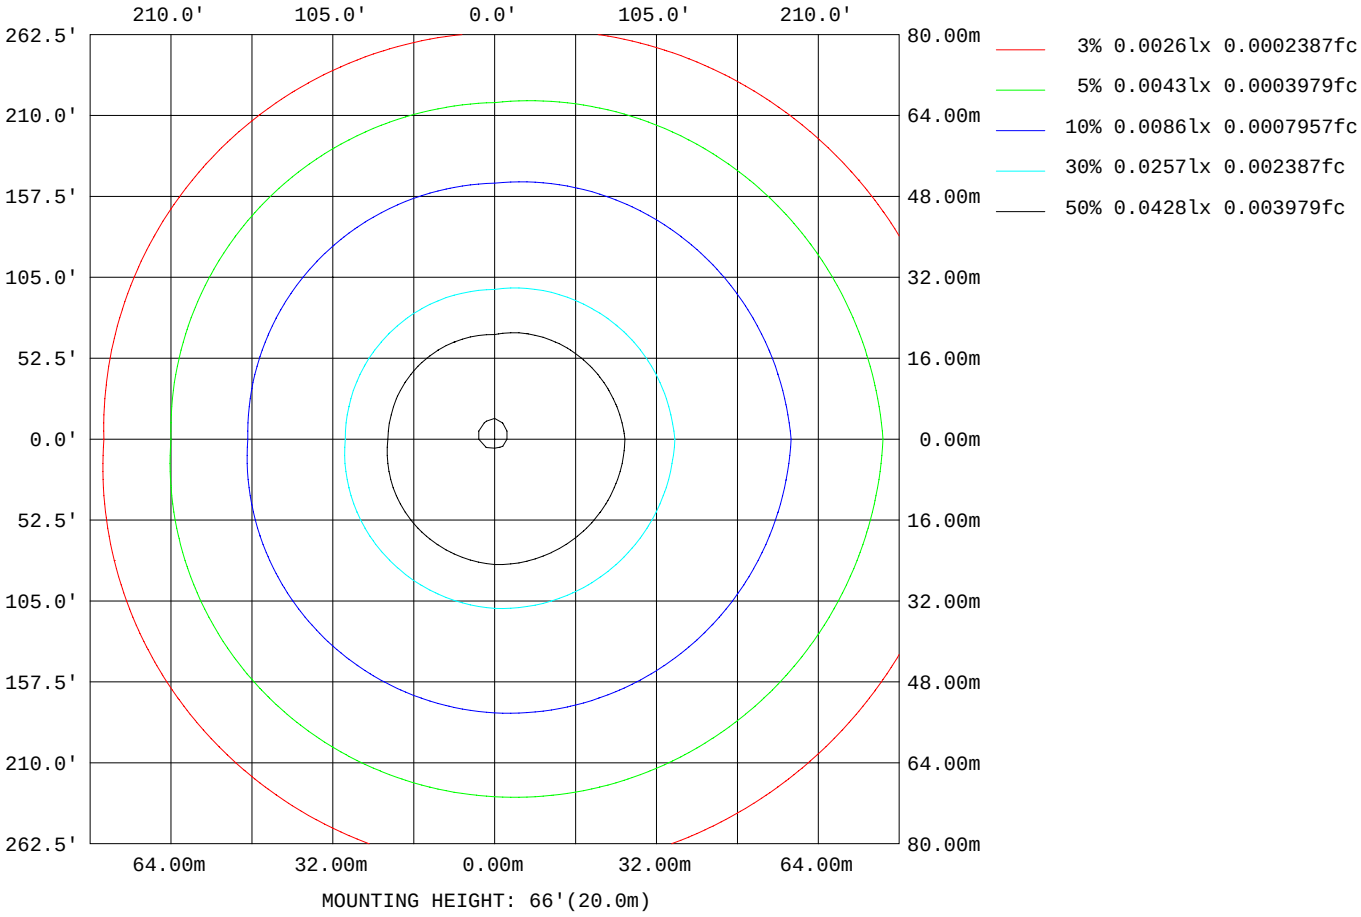

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:XCJ
Test Date:2024-12-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.6
Humidity:65.0%
Test Distance:9.313m [K=1.0000]
Remarks:

Checker: XCJ

Assessor: XZY

LED Avg.L Report

Test:U:229.89V I:0.0395A P:6.6704W PF:0.7342 Freq:49.99Hz Lamp Flux:820.31x1 lm		
NAME: 0019590108	TYPE:	WEIGHT:
SPEC.: 0019590108 3713202 7W 2700K 806lm	DIM.:	SERIAL No.:1
MFR.:/	SUR.:	Shielding Angle:

AvgL	cd/m2
L_0~180(65)av	1834
L_0~180(75)av	3317
L_0~180(85)av	10452
L_90~270(65)av	1732
L_90~270(75)av	3054
L_90~270(85)av	9463
L_45(65)av	1747
L_45(75)av	3102
L_45(85)av	9647

Standard: GB/T 29293-2012


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:XCJ
Test Date:2024-12-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.6
Humidity:65.0%
Test Distance:9.313m [K=1.0000]
Remarks:

Checker: XCJ

Assessor: XZY

Planar Illuminance Curve

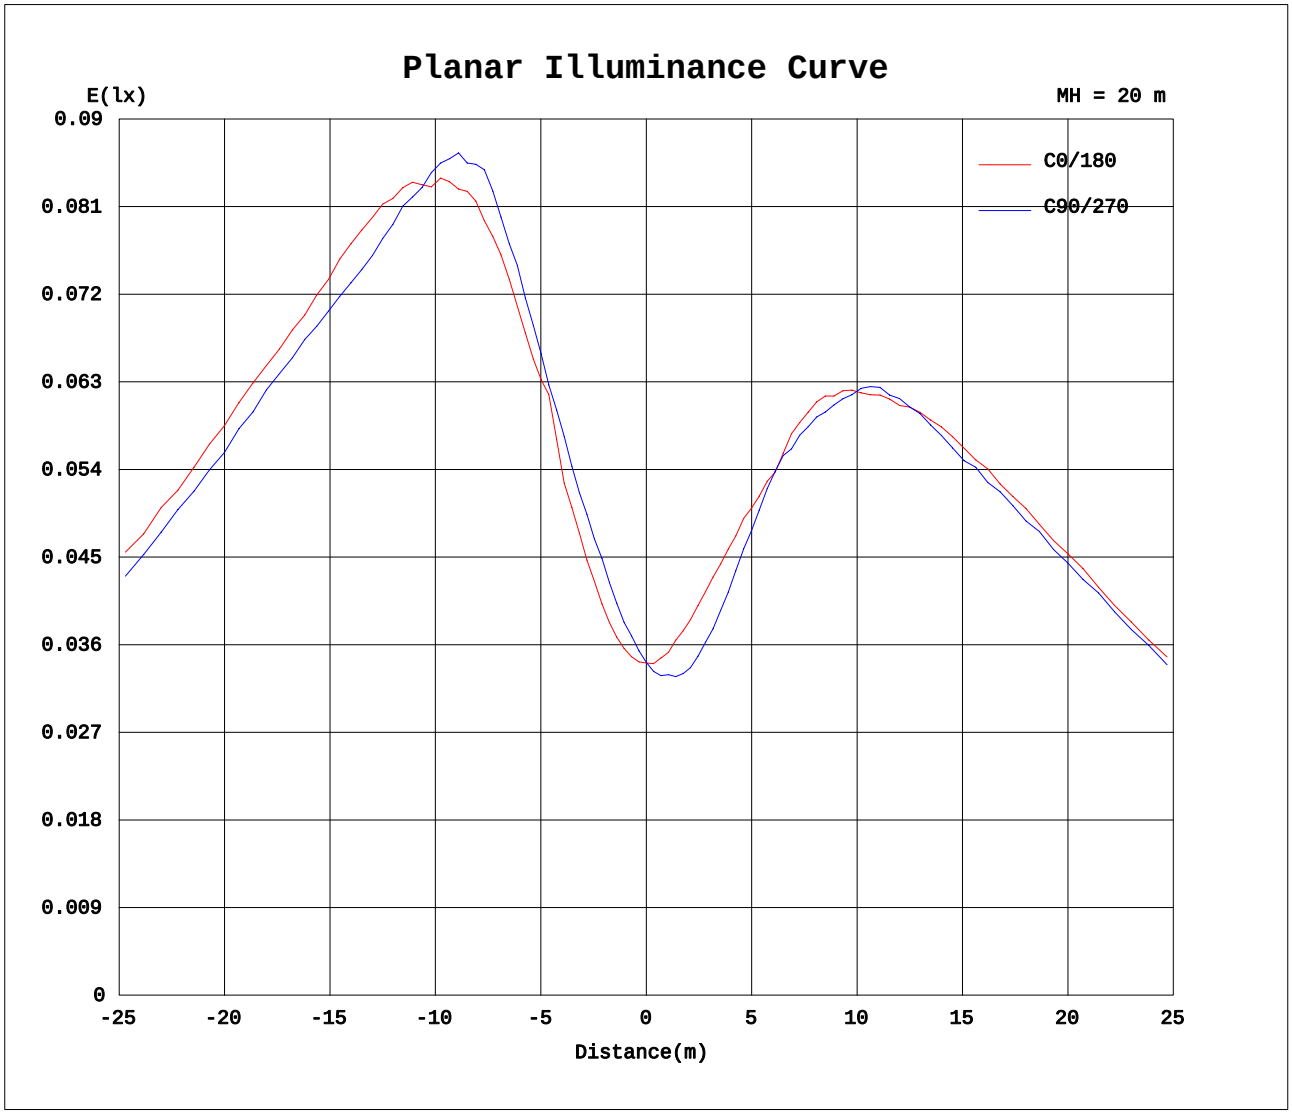

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:XCJ
Test Date:2024-12-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.6
Humidity:65.0%
Test Distance:9.313m [K=1.0000]
Remarks:

Checker: XCJ

Assessor: XZY

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:229.89V I:0.0395A P:6.6704W PF:0.7342 Freq:49.99Hz Lamp Flux:820.31x1 lm		
NAME: 0019590108	TYPE:	WEIGHT:
SPEC.: 0019590108 3713202 7W 2700K 806lm	DIM.:	SERIAL No.:1
MFR.: /	SUR.:	Shielding Angle:

Table--1 UNIT: cd

γ (DEG) \ C(DEG)	0	90	180	270
0	13.7	13.7	13.7	13.7
5	15.5	17.1	15.2	13.4
10	21.0	22.7	18.6	16.5
15	29.0	30.5	22.8	22.1
20	37.6	39.8	28.4	27.7
25	44.9	46.1	33.4	32.9
30	51.1	49.9	37.8	37.9
35	56.2	53.2	42.5	41.8
40	60.9	58.2	46.8	46.0
45	66.3	63.0	51.3	50.2
50	71.5	68.1	55.0	54.1
55	77.9	72.6	57.9	57.5
60	87.1	76.4	60.5	62.9
65	93.1	79.6	62.0	66.8
70	99.8	82.3	63.3	69.1
75	106	85.2	65.2	72.8
80	113	87.1	65.8	75.2
85	117	88.2	65.1	76.7
90	120	87.8	62.9	77.8
95	122	87.3	60.0	77.9
100	122	85.7	58.6	77.3
105	121	83.4	57.0	76.5
110	118	79.7	54.1	74.5
115	113	75.5	50.8	72.4
120	109	70.1	47.2	69.3
125	102	64.8	44.7	66.2
130	95.2	57.1	40.6	62.0
135	86.2	48.0	34.4	54.5
140	75.5	38.5	28.6	46.1
145	61.0	28.8	23.0	39.0
150	47.7	20.1	16.3	31.9
155	32.9	10.9	8.50	23.5
160	15.5	5.42	4.04	13.0
165	2.26	1.14	1.26	5.98
170	0.97	0.93	0.95	1.14
175	0.88	0.92	0.88	0.96
180	0.88	0.92	0.88	0.94

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:XCJ
Test Date:2024-12-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.6
Humidity:65.0%
Test Distance:9.313m [K=1.0000]
Remarks:

Checker: XCJ

Assessor: XZY