
LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:229.88V I:0.0426A P:7.2211W PF:0.7378 Freq:49.99Hz Lamp Flux:834.994x1 lm		
NAME: 0019590109	TYPE:	WEIGHT:
SPEC.: 0019590109 3713203 7W 2700K 806lm	DIM.:	SERIAL No.:1
MFR.: /	SUR.:	Shielding Angle:


DATA OF LAMP		PHOTOMETRIC DATA Eff: 115.63 lm/W			
MODEL	0019590109	Imax(cd)	83.69	S/MH(C0/180)	1.79
NOMINAL POWER(W)	7	LOR(%)	100.0	S/MH(C90/270)	1.83
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	806	η UP,DN(C0-180)	25.3,25.1
NOMINAL FLUX(lm)	806	CIE CLASS	DIFFUSE	η UP,DN(C180-360)	25.5,24.1
LAMPS INSIDE	1	η up(%)	50.8	CIBSE SHR NOM	2.00
TEST VOLTAGE(V)		η down(%)	49.2	CIBSE SHR MAX	2.00

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

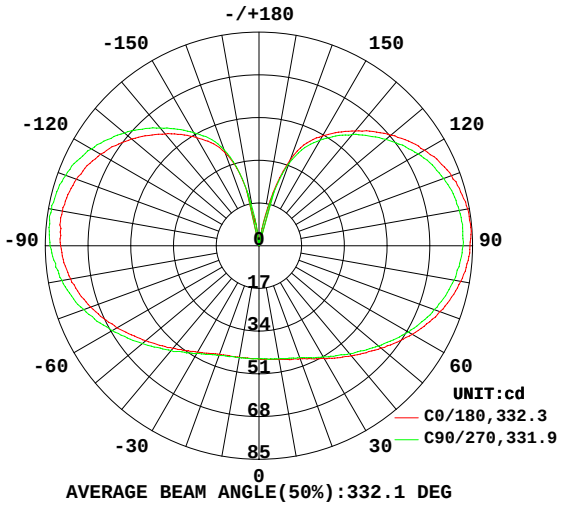

AVERAGE BEAM ANGLE(50%):332.1 DEG

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

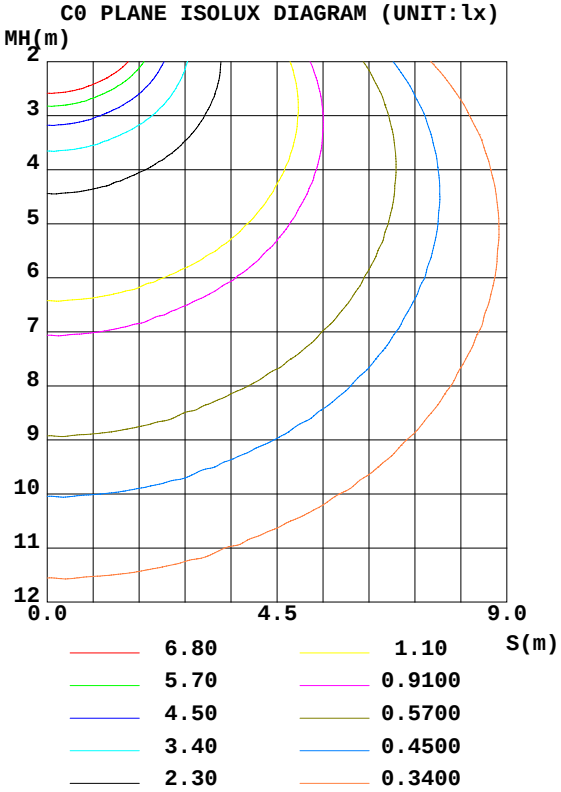

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:XCJ
Test Date:2024-12-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.6
Humidity:65.0%
Test Distance:9.313m [K=1.0000]
Remarks:

Checker: XCJ

Assessor: XZY

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C90	C180	C270					γ	Φ zone	Φ total	%lum,lamp
10	45.91	45.66	45.02	45.17					0- 10	4.320	4.320	0.51,0.51
20	47.83	47.42	45.99	46.43					10- 20	13.09	17.41	2.06,2.06
30	51.79	51.08	48.95	49.46					20- 30	22.50	39.91	4.72,4.72
40	57.23	55.98	53.28	54.41					30- 40	33.18	73.08	8.65,8.65
50	63.35	62.08	58.77	60.54					40- 50	45.10	118.2	14,14
60	70.44	68.67	65.33	67.54					50- 60	57.97	176.2	20.8,20.8
70	76.58	74.26	71.33	74.18					60- 70	70.63	246.8	29.2,29.2
80	81.53	78.86	76.09	79.55					70- 80	81.23	328.0	38.8,38.8
90	83.94	81.23	78.91	83.16					80- 90	87.92	415.9	49.2,49.2
100	84.34	80.88	79.43	83.73					90-100	89.65	505.6	59.8,59.8
110	81.56	78.28	77.33	81.83					100-110	85.85	591.4	70,70
120	76.10	73.21	72.91	76.98					110-120	76.95	668.4	79.1,79.1
130	68.49	65.97	66.17	69.75					120-130	64.06	732.4	86.7,86.7
140	59.65	57.84	58.05	61.22					130-140	49.25	781.7	92.5,92.5
150	50.47	48.54	49.65	51.94					140-150	34.51	816.2	96.6,96.6
160	36.41	34.62	39.43	40.67					150-160	20.90	837.1	99.1,99.1
170	7.079	5.343	9.594	14.75					160-170	7.467	844.6	99.9,99.9
180	0.9799	0.9868	0.9920	0.9868					170-180	0.4301	845.0	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:XCJ
Test Date:2024-12-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.6
Humidity:65.0%
Test Distance:9.313m [K=1.0000]
Remarks:

Checker: XCJ


Assessor: XZY

LUMINANCE LIMITATION CURVES

Test:U:229.88V I:0.0426A P:7.2211W PF:0.7378 Freq:49.99Hz Lamp Flux:834.994x1 lm		
NAME: 0019590109	**TYPE:**	**WEIGHT:**
SPEC.: 0019590109 3713203 7W 2700K 806lm	**DIM.:**	**SERIAL No.:1**
MFR.: /	**SUR.:**	**Shielding Angle:**

LUMINANCE LIMITATION CURVES

GLARE	CLASS	ILLUMINANCE (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300
		a	b	c	d	e	f	g	h

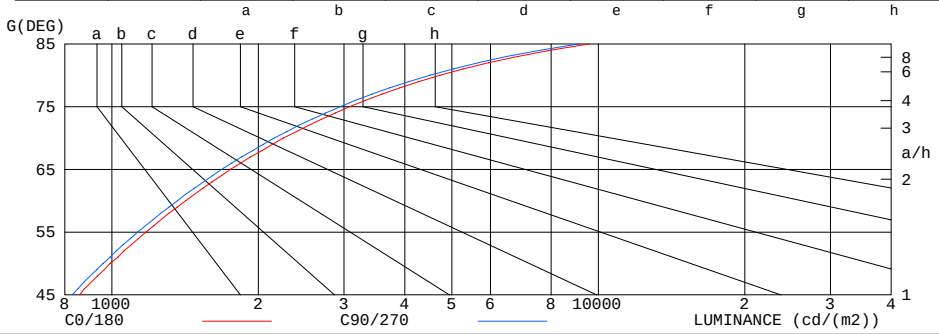

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	9596	9140
80	4726	4511
75	3082	2953
70	2254	2157
65	1753	1682
60	1418	1364
55	1176	1131
50	992	959
45	858	829

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:XCJ
Test Date:2024-12-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.6
Humidity:65.0%
Test Distance:9.313m [K=1.0000]
Remarks:

Checker: XCJ

Assessor: XZY


CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:229.88V I:0.0426A P:7.2211W PF:0.7378 Freq:49.99Hz Lamp Flux:834.994x1 lm		
NAME: 0019590109	TYPE:	WEIGHT:
SPEC.: 0019590109 3713203 7W 2700K 806lm	DIM.:	SERIAL No.:1
MFR.: /	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.07	1.07	1.07	.99	.99	.99	.83	.83	.83	.69	.69	.69	.55	.55	.55	.49
1.0	.86	.80	.75	.79	.73	.69	.65	.61	.57	.52	.49	.47	.41	.39	.36	.31
2.0	.72	.64	.57	.66	.59	.53	.54	.49	.44	.43	.39	.35	.33	.30	.27	.22
3.0	.62	.53	.45	.57	.48	.42	.46	.40	.35	.37	.32	.28	.28	.24	.21	.17
4.0	.54	.44	.37	.49	.41	.34	.40	.34	.28	.32	.27	.23	.24	.20	.17	.13
5.0	.47	.38	.31	.43	.35	.28	.35	.29	.24	.28	.23	.19	.21	.17	.14	.10
6.0	.42	.33	.26	.39	.30	.24	.32	.25	.20	.25	.20	.16	.19	.15	.12	.09
7.0	.38	.29	.23	.35	.26	.21	.28	.22	.17	.23	.17	.14	.17	.13	.10	.07
8.0	.34	.25	.20	.31	.23	.18	.26	.19	.15	.21	.16	.12	.16	.12	.09	.06
9.0	.31	.23	.17	.28	.21	.16	.23	.17	.13	.19	.14	.10	.14	.11	.08	.05
10.0	.28	.20	.15	.26	.19	.14	.21	.16	.12	.17	.13	.09	.13	.10	.07	.05

LAMPS

LUMINAIRE BUDGETARY DIAGRAM

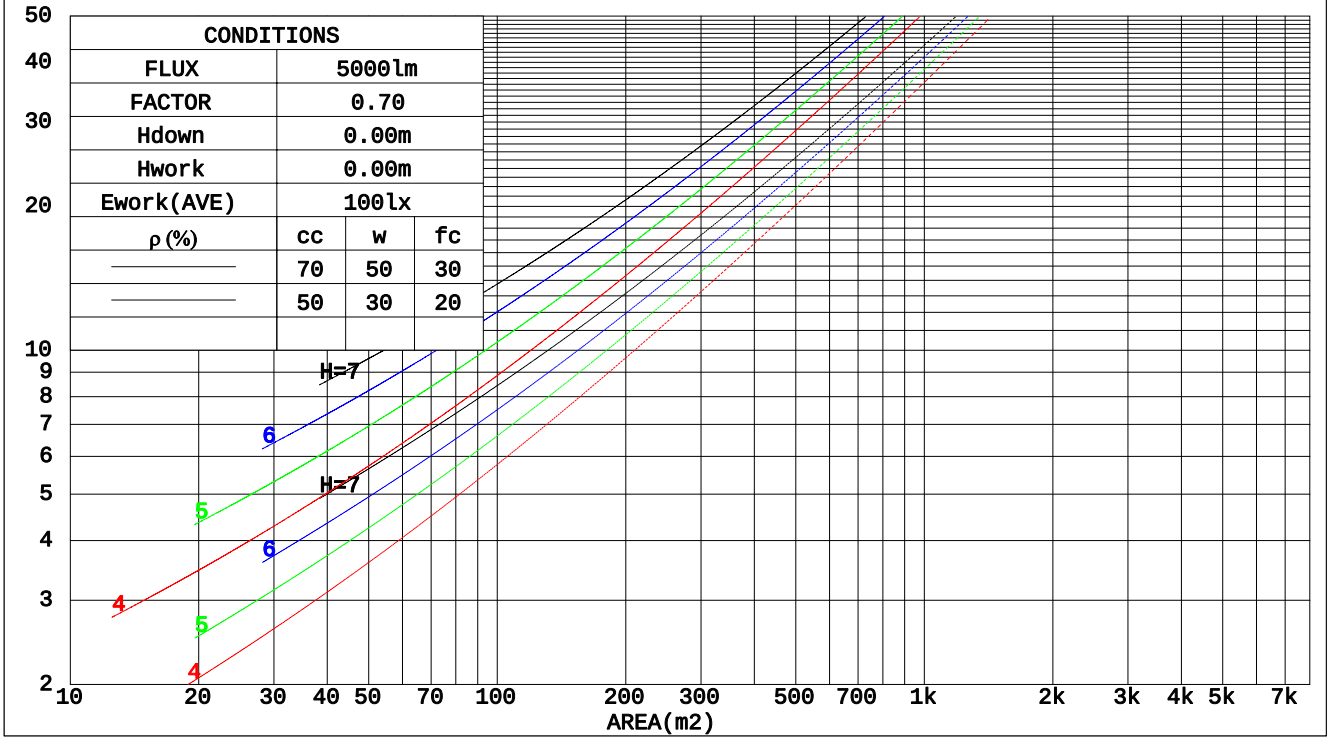

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:XCJ
Test Date:2024-12-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.6
Humidity:65.0%
Test Distance:9.313m [K=1.0000]
Remarks:

Checker: XCJ

Assessor: XZY

WEC AND CCEC

Test:U:229.88V I:0.0426A P:7.2211W PF:0.7378 Freq:49.99Hz Lamp Flux:834.994x1 lm		
NAME: 0019590109	TYPE:	WEIGHT:
SPEC.: 0019590109 3713203 7W 2700K 806lm	DIM.:	SERIAL No.:1
MFR.: /	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coeffcients(WEC)									
0.0																
1.0	.421	.239	.076	.398	.227	.072	.356	.204	.065	.316	.183	.059	.280	.163	.052	
2.0	.348	.191	.059	.327	.180	.056	.288	.160	.050	.253	.142	.044	.219	.124	.039	
3.0	.302	.161	.048	.283	.152	.046	.248	.134	.041	.215	.118	.036	.184	.102	.032	
4.0	.268	.139	.041	.251	.131	.039	.218	.116	.035	.188	.101	.030	.160	.087	.026	
5.0	.241	.123	.036	.225	.116	.034	.195	.102	.030	.167	.088	.026	.141	.075	.023	
6.0	.220	.110	.032	.205	.104	.030	.177	.091	.026	.151	.079	.023	.127	.067	.020	
7.0	.201	.100	.028	.188	.094	.027	.162	.082	.024	.138	.071	.021	.116	.060	.018	
8.0	.186	.091	.026	.174	.085	.024	.150	.075	.021	.127	.064	.019	.106	.055	.016	
9.0	.173	.084	.023	.161	.079	.022	.139	.069	.019	.118	.059	.017	.098	.050	.014	
10.0	.161	.077	.021	.150	.073	.020	.130	.063	.018	.110	.055	.016	.091	.046	.013	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.577	.577	.577	.493	.493	.493	.337	.337	.337	.193	.193	.193	.062	.062	.062	
1.0	.578	.545	.516	.495	.468	.444	.338	.322	.307	.195	.186	.178	.062	.060	.058	
2.0	.572	.524	.484	.490	.451	.418	.336	.312	.292	.194	.182	.171	.062	.059	.056	
3.0	.565	.509	.465	.485	.439	.403	.333	.305	.283	.192	.178	.167	.062	.058	.055	
4.0	.558	.498	.452	.479	.430	.393	.329	.300	.277	.190	.176	.164	.061	.057	.054	
5.0	.551	.489	.443	.473	.423	.386	.326	.296	.272	.189	.174	.162	.061	.057	.053	
6.0	.543	.482	.437	.467	.417	.381	.322	.292	.270	.187	.172	.160	.060	.056	.053	
7.0	.536	.476	.433	.461	.412	.377	.319	.289	.267	.185	.170	.159	.060	.056	.053	
8.0	.530	.470	.430	.456	.408	.375	.316	.287	.266	.184	.169	.158	.059	.055	.052	
9.0	.524	.466	.427	.451	.404	.372	.313	.284	.264	.182	.168	.158	.059	.055	.052	
10.0	.518	.462	.425	.447	.401	.371	.310	.282	.263	.181	.167	.157	.059	.055	.052	

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:XCJ
Test Date:2024-12-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.6
Humidity:65.0%
Test Distance:9.313m [K=1.0000]
Remarks:

Checker: XCJ

Assessor: XZY

UGR(Unified Glare Rating) Table

Test:U:229.88V I:0.0426A P:7.2211W PF:0.7378 Freq:49.99Hz Lamp Flux:834.994x1 lm		
NAME: 0019590109	TYPE:	WEIGHT:
SPEC.: 0019590109 3713203 7W 2700K 806lm	DIM.:	SERIAL No.:1
MFR.: /	SUR.:	Shielding Angle:

ceiling/cavity		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H	y = 2H	10.9	11.9	11.7	12.9	14.0	10.7	11.8	11.6	12.7	13.9
	3H	14.5	15.5	15.4	16.4	17.6	14.3	15.3	15.2	16.2	17.4
	4H	16.5	17.4	17.4	18.4	19.6	16.3	17.2	17.2	18.1	19.4
	6H	18.7	19.6	19.7	20.6	21.8	18.5	19.4	19.4	20.3	21.6
	8H	20.0	20.8	20.9	21.8	23.0	19.7	20.6	20.6	21.5	22.8
	12H	21.4	22.2	22.3	23.2	24.4	21.1	21.9	22.0	22.9	24.1
4H	2H	11.9	12.9	12.8	13.8	15.0	11.8	12.8	12.7	13.7	14.9
	3H	15.6	16.4	16.6	17.4	18.7	15.5	16.3	16.4	17.3	18.5
	4H	17.8	18.5	18.7	19.5	20.8	17.6	18.3	18.5	19.3	20.6
	6H	20.1	20.8	21.1	21.8	23.1	19.9	20.6	20.9	21.6	22.9
	8H	21.5	22.1	22.4	23.1	24.4	21.2	21.8	22.2	22.8	24.2
	12H	23.0	23.5	23.9	24.5	25.9	22.7	23.3	23.7	24.3	25.6
8H	4H	18.5	19.1	19.5	20.1	21.5	18.4	19.0	19.4	20.0	21.3
	6H	21.1	21.7	22.1	22.7	24.0	21.0	21.5	22.0	22.5	23.9
	8H	22.6	23.1	23.7	24.1	25.5	22.4	22.9	23.5	23.9	25.3
	12H	24.3	24.8	25.4	25.8	27.2	24.1	24.5	25.1	25.6	26.9
12H	4H	18.7	19.3	19.7	20.3	21.7	18.6	19.2	19.6	20.2	21.5
	6H	21.5	21.9	22.5	23.0	24.3	21.3	21.8	22.3	22.8	24.2
	8H	23.1	23.5	24.1	24.5	25.9	22.9	23.3	23.9	24.4	25.7
Variations with the observer position at spacings:											
S = 1.0H		+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H		+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H		+ 0.3 / - 0.4					+ 0.3 / - 0.4				

CIE Pub.117, 845.0 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.6)

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:XCJ
Test Date:2024-12-23

Checker: XCJ

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.6
Humidity:65.0%
Test Distance:9.313m [K=1.0000]
Remarks:

Assessor: XZY

UTILIZATION FACTORS TABLE

Test:U:229.88V I:0.0426A P:7.2211W PF:0.7378 Freq:49.99Hz Lamp Flux:834.994x1 lm		
NAME: 0019590109	TYPE:	WEIGHT:
SPEC.: 0019590109 3713203 7W 2700K 806lm	DIM.:	SERIAL No.:1
MFR.: /	SUR.:	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	35	22	15	33	21	15	30	19	13	6
0.80	44	30	21	41	28	20	36	25	18	9
1.00	51	36	27	47	34	26	41	32	23	11
1.25	57	43	33	53	40	31	46	35	28	14
1.50	63	49	39	58	45	36	49	39	32	16
2.00	70	57	47	65	53	44	55	46	39	20
2.50	76	63	54	70	59	50	59	50	43	23
3.00	80	68	59	73	63	55	62	54	47	25
4.00	85	75	67	78	70	62	66	59	53	29
5.00	89	80	72	81	74	67	68	62	57	32
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004				Suspended					SHRNOM = 1.25	

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:XCJ
Test Date:2024-12-23


γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.6
Humidity:65.0%
Test Distance:9.313m [K=1.0000]
Remarks:

Checker: XCJ

Assessor: XZY

ISOCANDELA DIAGRAM

Test:U:229.88V I:0.0426A P:7.2211W PF:0.7378 Freq:49.99Hz Lamp Flux:834.994x1 lm		
NAME: 0019590109	**TYPE:**	**WEIGHT:**
SPEC.: 0019590109 3713203 7W 2700K 806lm	**DIM.:**	**SERIAL No.:1**
MFR.: /	**SUR.:**	**Shielding Angle:**

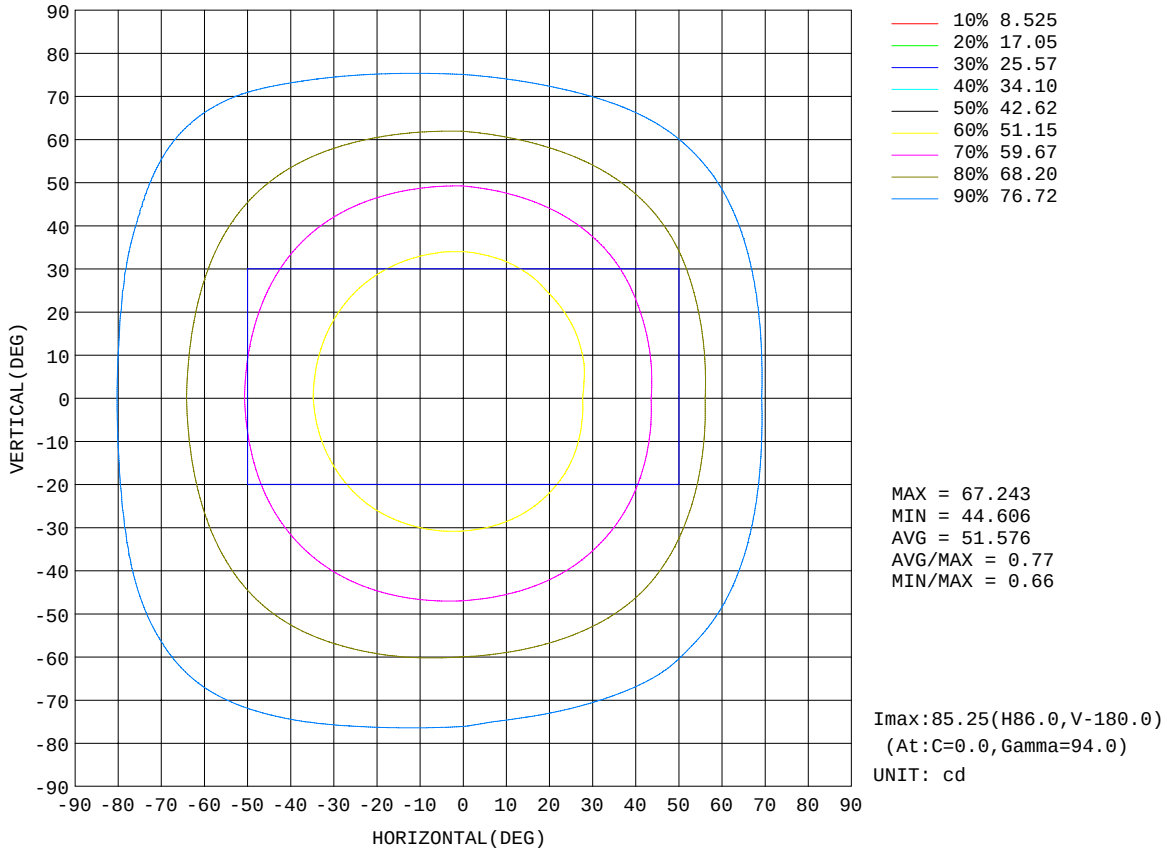

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:XCJ
Test Date:2024-12-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.6
Humidity:65.0%
Test Distance:9.313m [K=1.0000]
Remarks:


Checker: XCJ

Assessor: XZY

AAI Figure

Test:U:229.88V I:0.0426A P:7.2211W PF:0.7378 Freq:49.99Hz Lamp Flux:834.994x1 lm		
NAME: 0019590109	TYPE:	WEIGHT:
SPEC.: 0019590109 3713203 7W 2700K 806lm	DIM.:	SERIAL No.:1
MFR.:/	SUR.:	Shielding Angle:

Flux out:94.07 lm

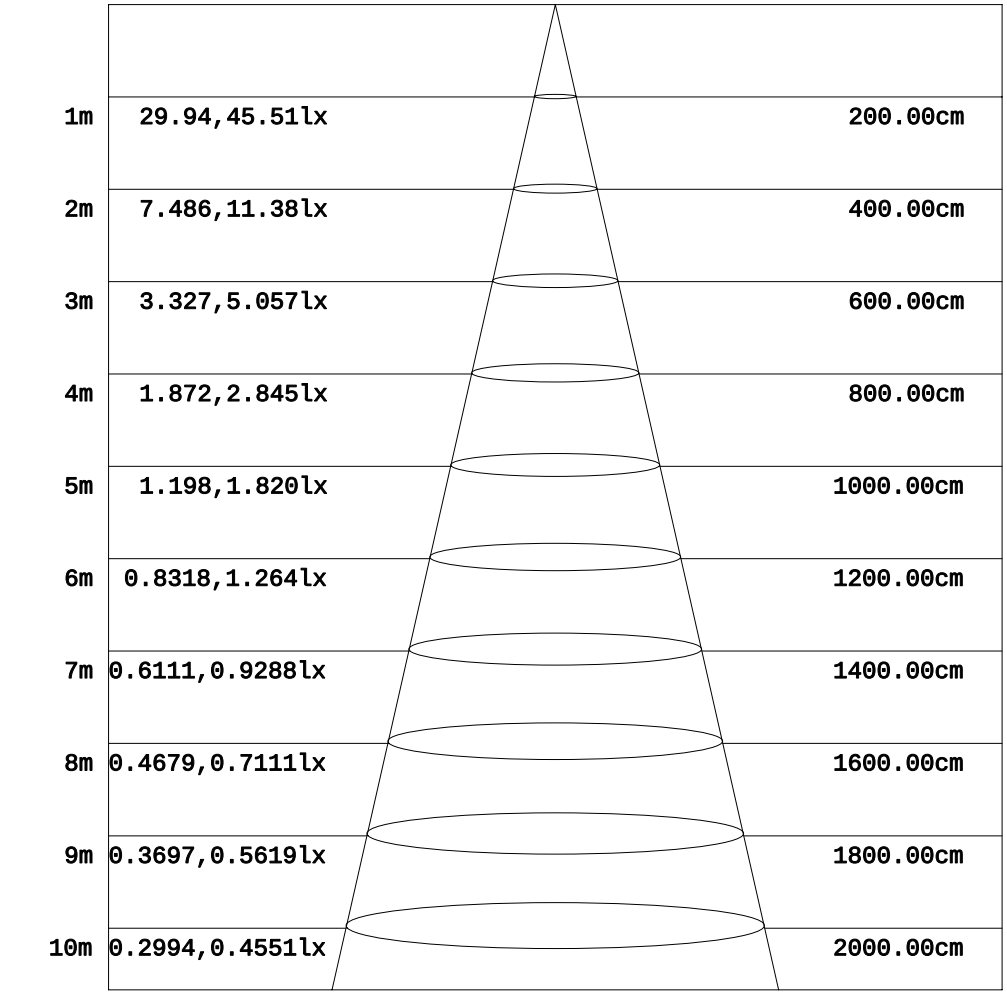

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:XCJ
Test Date:2024-12-23


Checker: XCJ

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.6
Humidity:65.0%
Test Distance:9.313m [K=1.0000]
Remarks:

Assessor: XZY

ISOLUX DIAGRAM

Test:U:229.88V I:0.0426A P:7.2211W PF:0.7378 Freq:49.99Hz Lamp Flux:834.994x1 lm		
NAME: 0019590109	**TYPE:**	**WEIGHT:**
SPEC.: 0019590109 3713203 7W 2700K 806lm	**DIM.:**	**SERIAL No.:1**
MFR.: /	**SUR.:**	**Shielding Angle:**

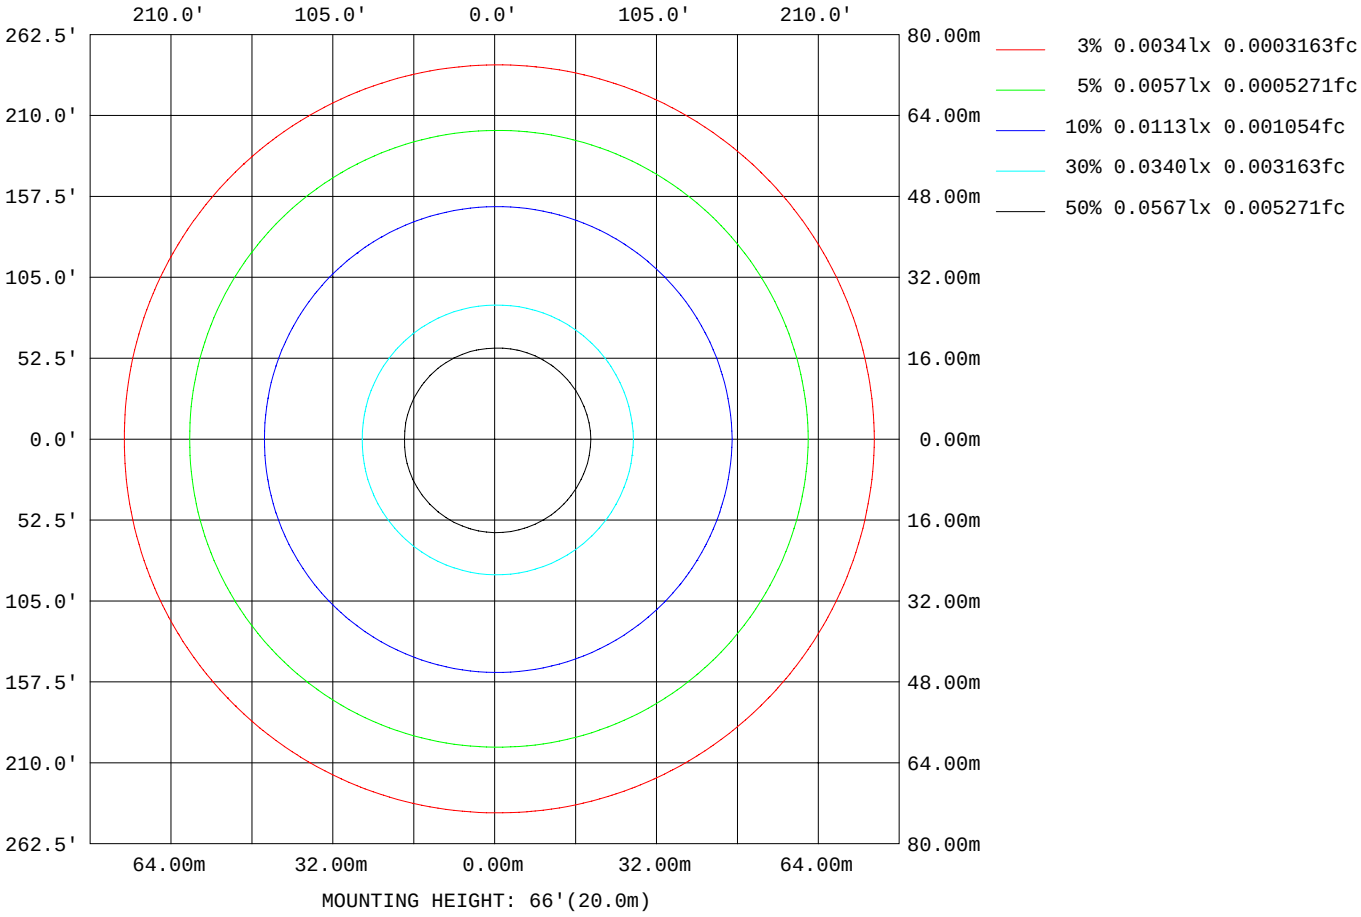

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:XCJ
Test Date:2024-12-23

Checker: XCJ

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.6
Humidity:65.0%
Test Distance:9.313m [K=1.0000]
Remarks:

Assessor: XZY

LED Avg.L Report

Test:U:229.88V I:0.0426A P:7.2211W PF:0.7378 Freq:49.99Hz Lamp Flux:834.994x1 lm		
NAME: 0019590109	**TYPE:**	**WEIGHT:**
SPEC.: 0019590109 3713203 7W 2700K 806lm	**DIM.:**	**SERIAL No.:1**
MFR.: /	**SUR.:**	**Shielding Angle:**

AvgL	cd/m2
L_0~180(65)av	1680
L_0~180(75)av	2961
L_0~180(85)av	9239
L_90~270(65)av	1688
L_90~270(75)av	2977
L_90~270(85)av	9259
L_45(65)av	1681
L_45(75)av	2965
L_45(85)av	9233

Standard: GB/T 29293-2012


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:XCJ
Test Date:2024-12-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.6
Humidity:65.0%
Test Distance:9.313m [K=1.0000]
Remarks:

Checker: XCJ

Assessor: XZY

Planar Illuminance Curve

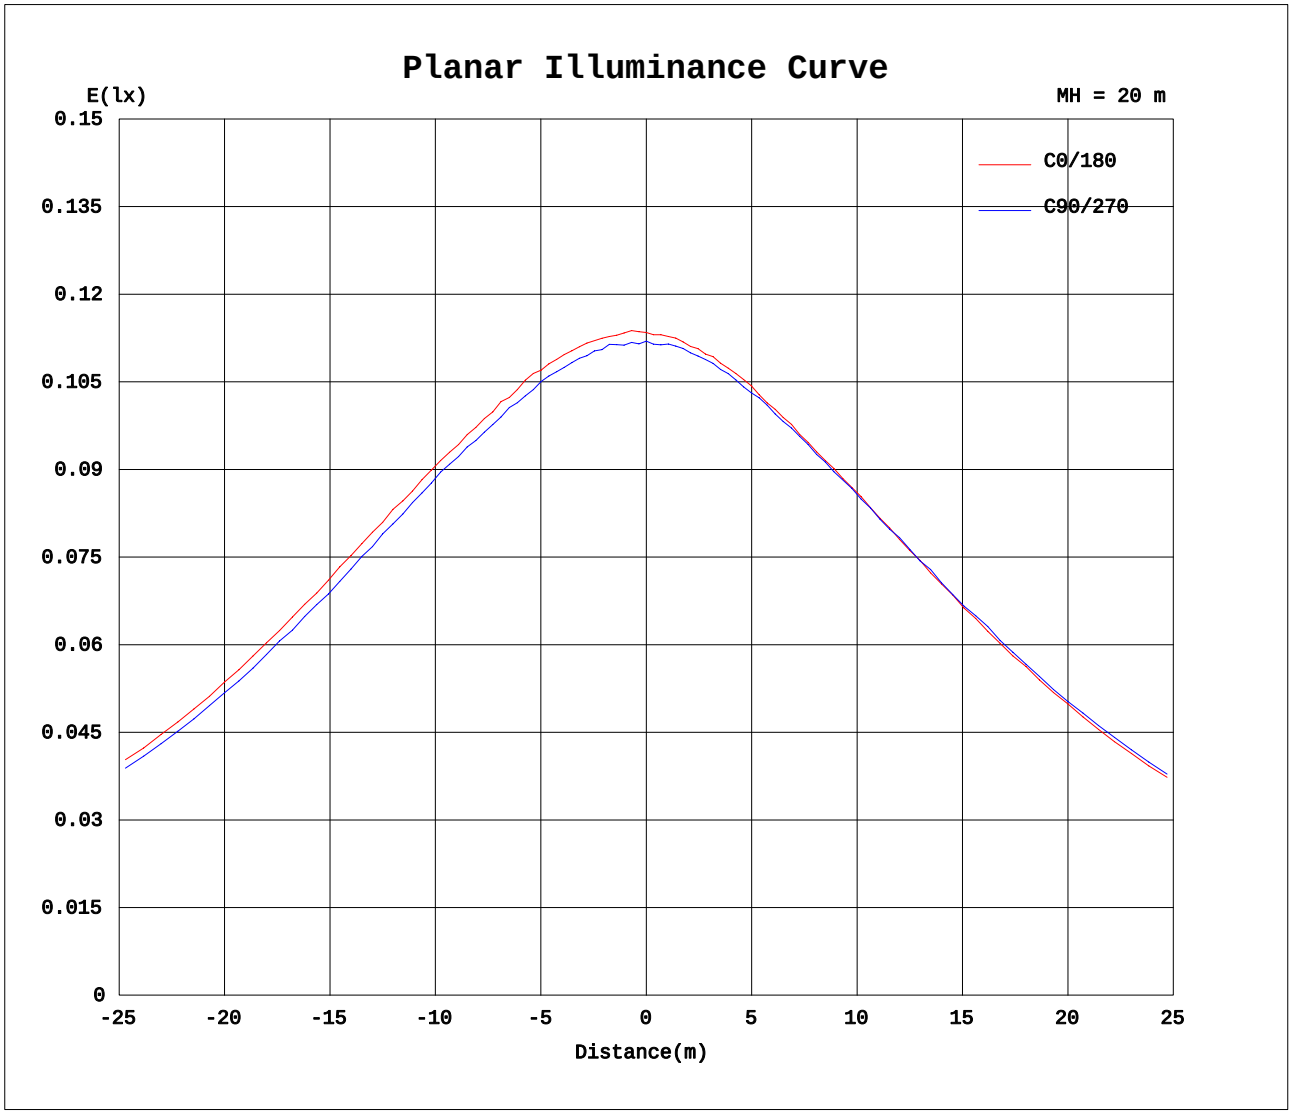

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:XCJ
Test Date:2024-12-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.6
Humidity:65.0%
Test Distance:9.313m [K=1.0000]
Remarks:

Checker: XCJ

Assessor: XZY

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:229.88V I:0.0426A P:7.2211W PF:0.7378 Freq:49.99Hz Lamp Flux:834.994x1 lm		
NAME: 0019590109	TYPE:	WEIGHT:
SPEC.: 0019590109 3713203 7W 2700K 806lm	DIM.:	SERIAL No.:1
MFR.: /	SUR.:	Shielding Angle:

Table--1 UNIT: cd

γ (DEG) \ C(DEG)	0	90	180	270
0	45.1	45.1	45.1	45.1
5	45.3	45.4	45.0	45.1
10	45.9	45.7	45.0	45.2
15	46.9	46.3	45.3	45.7
20	47.8	47.4	46.0	46.4
25	49.6	49.2	47.2	47.7
30	51.8	51.1	48.9	49.5
35	54.4	53.4	50.9	51.7
40	57.2	56.0	53.3	54.4
45	60.3	59.0	56.1	57.3
50	63.3	62.1	58.8	60.5
55	67.0	65.3	61.9	64.0
60	70.4	68.7	65.3	67.5
65	73.6	71.5	68.4	71.1
70	76.6	74.3	71.3	74.2
75	79.3	76.9	74.0	77.2
80	81.5	78.9	76.1	79.6
85	83.1	80.2	78.0	81.2
90	83.9	81.2	78.9	83.2
95	84.6	81.4	79.1	83.9
100	84.3	80.9	79.4	83.7
105	83.0	80.0	78.8	83.3
110	81.6	78.3	77.3	81.8
115	79.1	76.1	75.5	79.9
120	76.1	73.2	72.9	77.0
125	72.7	69.8	69.6	73.6
130	68.5	66.0	66.2	69.7
135	64.4	61.8	62.1	65.6
140	59.7	57.8	58.1	61.2
145	55.2	53.4	54.1	56.6
150	50.5	48.5	49.7	51.9
155	45.2	43.1	45.3	47.3
160	36.4	34.6	39.4	40.7
165	22.1	20.1	29.7	30.1
170	7.08	5.34	9.59	14.7
175	1.00	1.75	1.93	2.23
180	0.98	0.99	0.99	0.99

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:XCJ
Test Date:2024-12-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.6
Humidity:65.0%
Test Distance:9.313m [K=1.0000]
Remarks:

Checker: XCJ

Assessor: XZY