


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:229.90V I:0.0714A P:15.492W PF:0.9436 Freq:49.99Hz Lamp Flux:1245x1 lm		
NAME: SGS SKU No.: 0017440191	TYPE:	WEIGHT:
SPEC.: 15W Slim Downlight, 3CCT DIMMABLE IP20 In Front DIM.:	SERIAL No.: 15W 4000K	
MFR.: LIT by CARDI	SUR.: $\phi 0.174$	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 80.37 lm/W
MODEL		I _{max} (cd)	439.1	S/MH (C0/180)	1.30	
NOMINAL POWER(W)	15	LOR (%)	100.0	S/MH (C90/270)	1.23	
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	1245.0	η UP,DN (C0-180)	0.1,48.7	
NOMINAL FLUX(lm)	1245	CIE CLASS	DIRECT	η UP,DN (C180-360)	0.2,51.0	
LAMPS INSIDE	1	η up (%)	0.3	CIBSE SHR NOM	1.25	
TEST VOLTAGE(V)	230	η down (%)	99.7	CIBSE SHR MAX	1.35	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

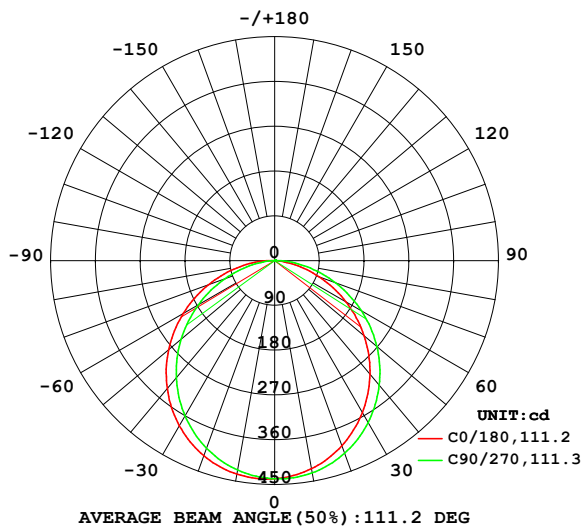

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

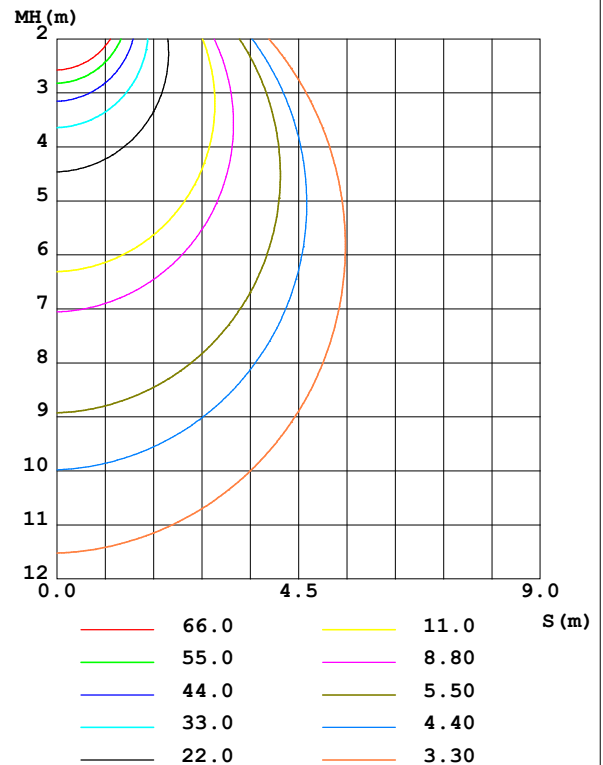

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-09-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C90	C180	C270					γ	Φ zone	Φ total	%lum, lamp
10	424.8	433.0	435.7	427.5					0- 10	41.45	41.45	3.33,3.33
20	395.7	411.8	417.2	401.1					10- 20	118.6	160.0	12.9,12.9
30	352.7	375.8	383.2	360.4					20- 30	179.2	339.2	27.2,27.2
40	298.1	327.0	335.6	307.5					30- 40	215.1	554.4	44.5,44.5
50	234.7	268.0	278.1	245.3					40- 50	222.0	776.4	62.4,62.4
60	165.5	201.3	212.0	176.5					50- 60	199.6	976.0	78.4,78.4
70	94.58	130.0	141.0	105.6					60- 70	151.8	1128	90.6,90.6
80	30.88	60.20	70.93	39.99					70- 80	87.95	1216	97.7,97.7
90	0.0201	4.393	12.33	0.0404					80- 90	25.71	1241	99.7,99.7
100	0.1207	0.1158	0.1058	0.1205					90-100	0.6243	1242	99.8,99.8
110	0.2766	0.2767	0.2518	0.2965					100-110	0.2036	1242	99.8,99.8
120	0.4326	0.4326	0.4280	0.4724					110-120	0.3546	1243	99.8,99.8
130	0.5786	0.5834	0.6091	0.6535					120-130	0.4711	1243	99.9,99.9
140	0.6944	0.7091	0.7652	0.8093					130-140	0.5227	1244	99.9,99.9
150	0.8101	0.8247	0.9260	0.9251					140-150	0.5061	1244	99.9,99.9
160	0.9358	0.9404	1.062	1.051					150-160	0.4314	1245	100,100
170	1.047	1.056	1.178	1.136					160-170	0.2964	1245	100,100
180	1.177	1.177	1.188	1.167					170-180	0.1080	1245	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-09-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:229.90V I:0.0714A P:15.492W PF:0.9436 Freq:49.99Hz Lamp Flux:1245x1 lm		
NAME: SGS SKU No.: 0017440191	TYPE:	WEIGHT:
SPEC.: 15W Slim Downlight, 3CCT DIMMABLE IP20 In Front DIM.:		SERIAL No.: 15W 4000K
MFR.: LIT by CARDI	SUR.: $\phi 0.174$	Shielding Angle:

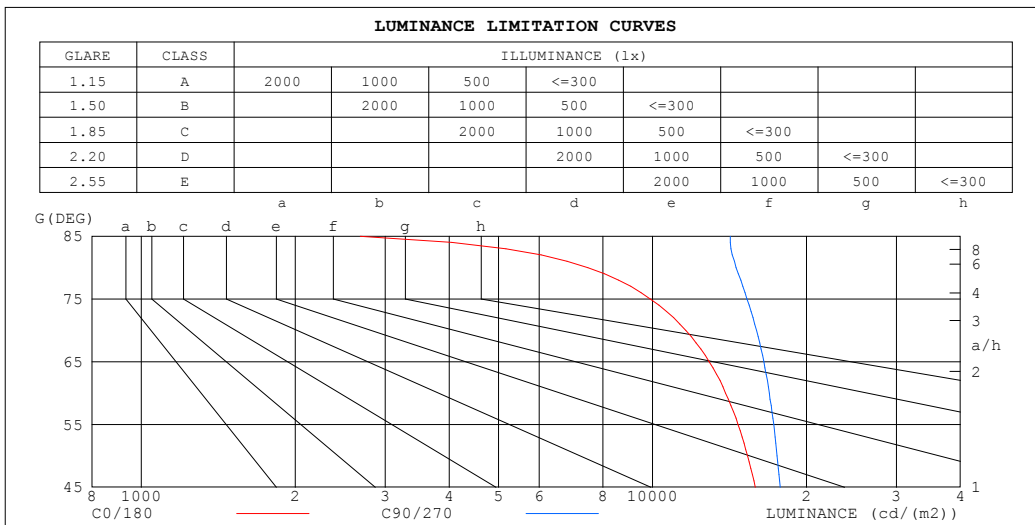

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	2682	14200
80	7469	14571
75	9902	15301
70	11615	15977
65	12915	16503
60	13899	16921
55	14697	17259
50	15337	17528
45	15888	17765


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-09-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:229.90V I:0.0714A P:15.492W PF:0.9436 Freq:49.99Hz Lamp Flux:1245x1 lm		
NAME: SGS SKU No.: 0017440191	TYPE:	WEIGHT:
SPEC.: 15W Slim Downlight, 3CCT DIMMABLE IP20 In Front DIM.:	SERIAL No.: 15W 4000K	
MFR.: LIT by CARDI	SUR.: $\phi 0.174$	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.99	.95	1.01	.97	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.78	.88	.82	.77	.85	.79	.75	.81	.77	.73	.78	.75	.71	.69
3.0	.79	.71	.64	.78	.70	.64	.75	.68	.63	.72	.66	.62	.69	.64	.60	.58
4.0	.70	.61	.55	.69	.61	.54	.66	.59	.53	.64	.58	.53	.62	.56	.52	.50
5.0	.63	.54	.47	.62	.53	.47	.59	.52	.46	.57	.51	.46	.55	.50	.45	.43
6.0	.56	.47	.41	.55	.47	.41	.54	.46	.40	.52	.45	.40	.50	.44	.40	.38
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.36	.47	.40	.35	.46	.40	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.45	.37	.32	.43	.37	.32	.42	.36	.31	.30
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.28	.27
10.0	.40	.32	.26	.39	.31	.26	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24

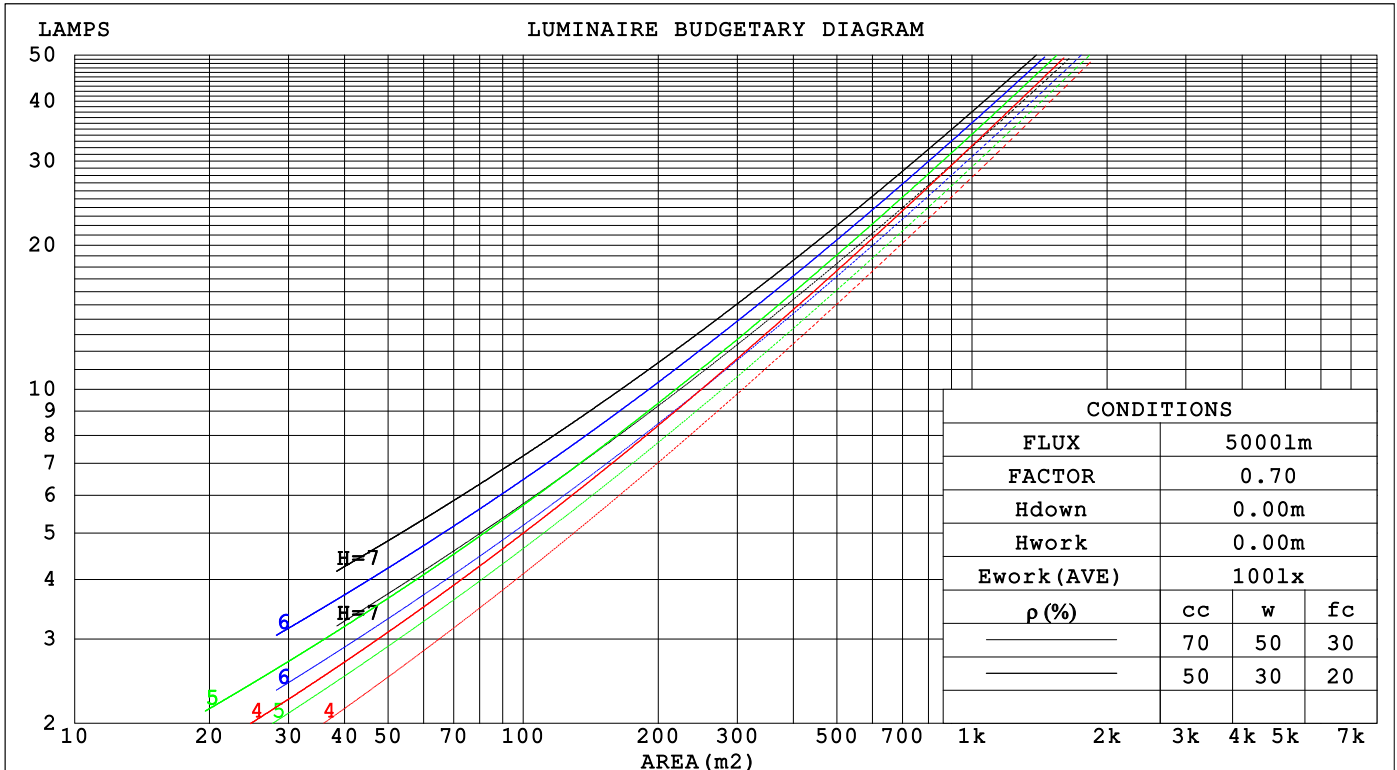

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-09-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:229.90V I:0.0714A P:15.492W PF:0.9436 Freq:49.99Hz Lamp Flux:1245x1 lm		
NAME: SGS SKU No.: 0017440191	TYPE:	WEIGHT:
SPEC.: 15W Slim Downlight, 3CCT DIMMABLE IP20 In Front DIM.:	SERIAL No.: 15W 4000K	
MFR.: LIT by CARDI	SUR.: ϕ 0.174	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.312	.177	.056	.304	.174	.055	.291	.167	.053	.279	.161	.052	.267	.155	.050	
2.0	.292	.160	.049	.286	.158	.049	.274	.153	.047	.263	.148	.046	.253	.143	.045	
3.0	.270	.144	.043	.265	.142	.043	.254	.138	.042	.245	.134	.041	.236	.130	.040	
4.0	.249	.130	.038	.244	.128	.038	.235	.125	.037	.226	.122	.037	.218	.119	.036	
5.0	.230	.117	.034	.226	.116	.034	.218	.113	.033	.210	.111	.033	.203	.108	.033	
6.0	.214	.107	.031	.210	.106	.030	.202	.104	.030	.195	.102	.030	.189	.100	.030	
7.0	.199	.098	.028	.195	.097	.028	.189	.095	.027	.183	.094	.027	.177	.092	.027	
8.0	.186	.091	.026	.183	.090	.025	.177	.088	.025	.171	.087	.025	.166	.085	.025	
9.0	.174	.084	.023	.171	.083	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023	
10.0	.164	.078	.022	.161	.078	.022	.156	.077	.022	.152	.075	.021	.147	.074	.021	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.193	.193	.193	.165	.165	.165	.112	.112	.112	.065	.065	.065	.021	.021	.021	
1.0	.183	.158	.136	.156	.136	.117	.107	.093	.081	.062	.054	.047	.020	.017	.015	
2.0	.175	.134	.100	.149	.115	.087	.102	.080	.060	.059	.046	.035	.019	.015	.012	
3.0	.167	.116	.076	.143	.100	.066	.098	.070	.046	.057	.041	.027	.018	.013	.009	
4.0	.159	.103	.061	.137	.089	.053	.094	.062	.037	.054	.036	.022	.017	.012	.007	
5.0	.152	.093	.049	.130	.080	.043	.090	.056	.030	.052	.033	.018	.017	.011	.006	
6.0	.144	.084	.041	.124	.073	.036	.086	.051	.025	.050	.030	.015	.016	.010	.005	
7.0	.138	.078	.035	.118	.067	.031	.082	.047	.022	.048	.028	.013	.015	.009	.004	
8.0	.131	.072	.031	.113	.062	.027	.078	.044	.019	.045	.026	.011	.015	.008	.004	
9.0	.125	.067	.027	.108	.058	.024	.075	.041	.017	.043	.024	.010	.014	.008	.003	
10.0	.119	.063	.025	.103	.054	.022	.071	.038	.015	.042	.023	.009	.014	.007	.003	

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-09-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:229.90V I:0.0714A P:15.492W PF:0.9436 Freq:49.99Hz Lamp Flux:1245x1 lm											
NAME: SGS SKU No.: 0017440191					TYPE:			WEIGHT:			
SPEC.: 15W Slim Downlight, 3CCT DIMMABLE IP20 In Front					DIM.:			SERIAL No.: 15W 4000K			
MFR.: LIT by CARDI					SUR.: $\varphi 0.174$			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	2H	21.3	22.8	21.5	23.0	23.2	21.9	23.5	22.2	23.7	23.9
	3H	22.6	24.0	22.9	24.2	24.4	23.6	25.0	23.9	25.2	25.5
	4H	23.0	24.3	23.3	24.6	24.9	24.2	25.6	24.6	25.8	26.1
	6H	23.3	24.5	23.6	24.8	25.1	24.8	26.0	25.1	26.3	26.6
	8H	23.3	24.5	23.6	24.8	25.1	25.0	26.2	25.3	26.5	26.8
	12H	23.3	24.4	23.6	24.7	25.0	25.1	26.3	25.5	26.6	26.9
4H	2H	21.9	23.3	22.3	23.5	23.8	22.5	23.8	22.8	24.1	24.3
	3H	23.4	24.6	23.8	24.9	25.2	24.3	25.4	24.6	25.7	26.0
	4H	24.0	25.1	24.4	25.4	25.7	25.1	26.1	25.4	26.5	26.8
	6H	24.3	25.3	24.7	25.7	26.0	25.7	26.7	26.1	27.0	27.4
	8H	24.4	25.3	24.8	25.7	26.1	26.0	26.9	26.4	27.2	27.6
	12H	24.4	25.2	24.8	25.6	26.0	26.2	27.0	26.6	27.4	27.8
8H	4H	24.3	25.2	24.7	25.6	26.0	25.3	26.1	25.7	26.5	26.9
	6H	24.8	25.5	25.2	25.9	26.4	26.1	26.8	26.5	27.2	27.6
	8H	24.9	25.6	25.4	26.0	26.5	26.4	27.1	26.9	27.5	27.9
	12H	25.0	25.5	25.4	26.0	26.5	26.7	27.3	27.2	27.7	28.2
12H	4H	24.3	25.1	24.8	25.5	25.9	25.3	26.1	25.7	26.5	26.9
	6H	24.9	25.5	25.3	26.0	26.4	26.1	26.7	26.6	27.2	27.6
	8H	25.0	25.6	25.5	26.1	26.5	26.5	27.0	26.9	27.5	28.0
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 0.2 / - 0.2					+ 0.1 / - 0.2				
1.5H		+ 0.2 / - 0.4					+ 0.1 / - 0.3				
2.0H		+ 0.2 / - 0.4					+ 0.2 / - 0.3				

CIE Pub.117, 1245 lm Total Lamp Luminous Flux Correct ($8\log(F/F_0) = 0.8$)
Area: 0.0238 m²

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-09-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:229.90V I:0.0714A P:15.492W PF:0.9436 Freq:49.99Hz Lamp Flux:1245x1 lm		
NAME: SGS SKU No.: 0017440191	TYPE:	WEIGHT:
SPEC.: 15W Slim Downlight, 3CCT DIMMABLE IP20 In Front DIM.:		SERIAL No.: 15W 4000K
MFR.: LIT by CARDI	SUR.: $\phi 0.174$	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	57	46	39	57	46	39	56	45	39	32
0.80	67	56	48	66	55	48	65	55	48	41
1.00	76	65	57	75	64	57	72	66	57	49
1.25	83	72	65	81	72	65	79	70	64	57
1.50	88	78	71	86	77	70	83	75	69	62
2.00	95	86	80	93	85	79	89	83	77	69
2.50	99	91	85	97	89	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	86	78
4.00	106	100	96	104	99	94	99	95	92	83
5.00	109	104	100	106	102	98	101	98	95	86
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2024-09-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity: 65.0%
 Test Distance: 8.800m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:229.90V I:0.0714A P:15.492W PF:0.9436 Freq:49.99Hz Lamp Flux:1245x1 lm		
NAME: SGS SKU No.: 0017440191	TYPE:	WEIGHT:
SPEC.: 15W Slim Downlight, 3CCT DIMMABLE IP20 In Front DIM.:		SERIAL No.: 15W 4000K
MFR.: LIT by CARDI	SUR.: $\phi 0.174$	Shielding Angle:

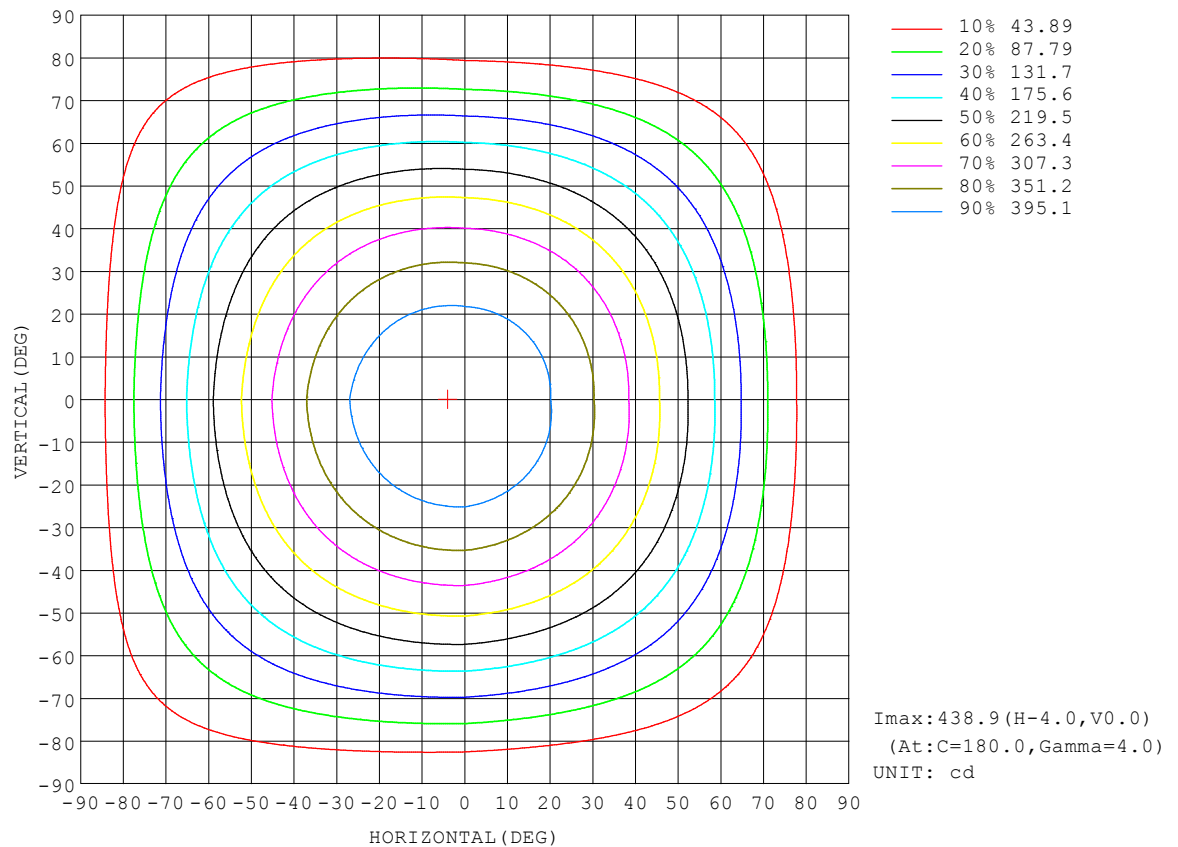


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-09-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity: 65.0%
Test Distance: 8.800m [K=1.0000]
Remarks:

AAI Figure

Test:U:229.90V I:0.0714A P:15.492W PF:0.9436 Freq:49.99Hz Lamp Flux:1245x1 lm		
NAME: SGS SKU No.: 0017440191	TYPE:	WEIGHT:
SPEC.: 15W Slim Downlight, 3CCT DIMMABLE IP20 In Front DIM.:	SERIAL No.: 15W 4000K	
MFR.: LIT by CARDI	SUR.: $\phi 0.174$	Shielding Angle:

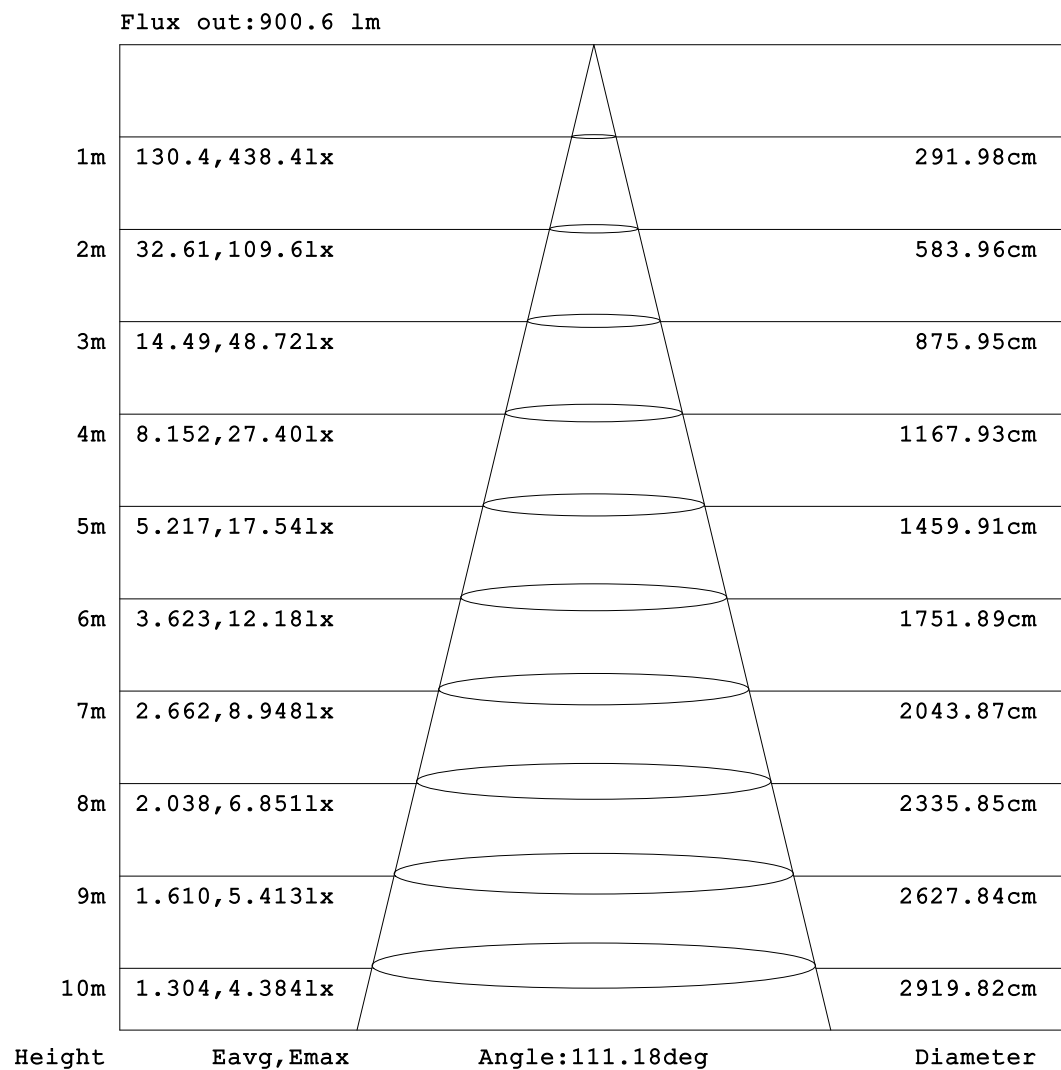


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-09-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:229.90V I:0.0714A P:15.492W PF:0.9436 Freq:49.99Hz Lamp Flux:1245x1 lm		
NAME: SGS SKU No.: 0017440191	TYPE:	WEIGHT:
SPEC.: 15W Slim Downlight, 3CCT DIMMABLE IP20 In Front DIM.:	SERIAL No.: 15W 4000K	
MFR.: LIT by CARDI	SUR.: ϕ 0.174	Shielding Angle:

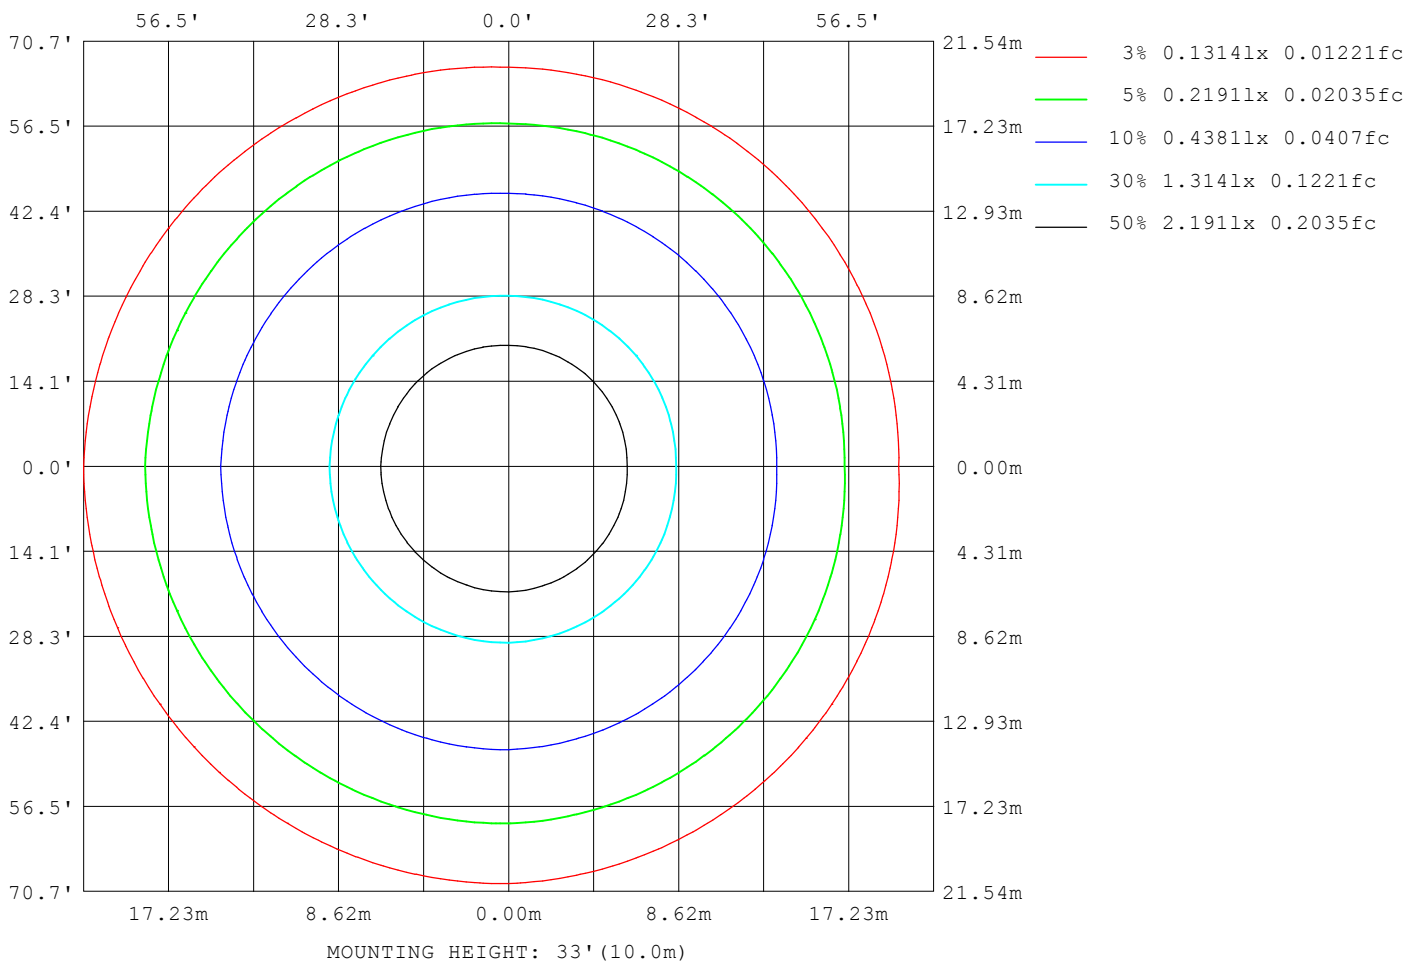

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-09-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:229.90V I:0.0714A P:15.492W PF:0.9436 Freq:49.99Hz Lamp Flux:1245x1 lm		
NAME: SGS SKU No.: 0017440191	TYPE:	WEIGHT:
SPEC.: 15W Slim Downlight, 3CCT DIMMABLE IP20 In Front DIM.:		SERIAL No.: 15W 4000K
MFR.: LIT by CARDI	SUR.: ϕ 0.174	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	15248
L_0~180 (75) av	13494
L_0~180 (85) av	10838
L_90~270 (65) av	15269
L_90~270 (75) av	13444
L_90~270 (85) av	10128
L_45 (65) av	15407
L_45 (75) av	13688
L_45 (85) av	10904

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-09-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

Planar Illuminance Curve

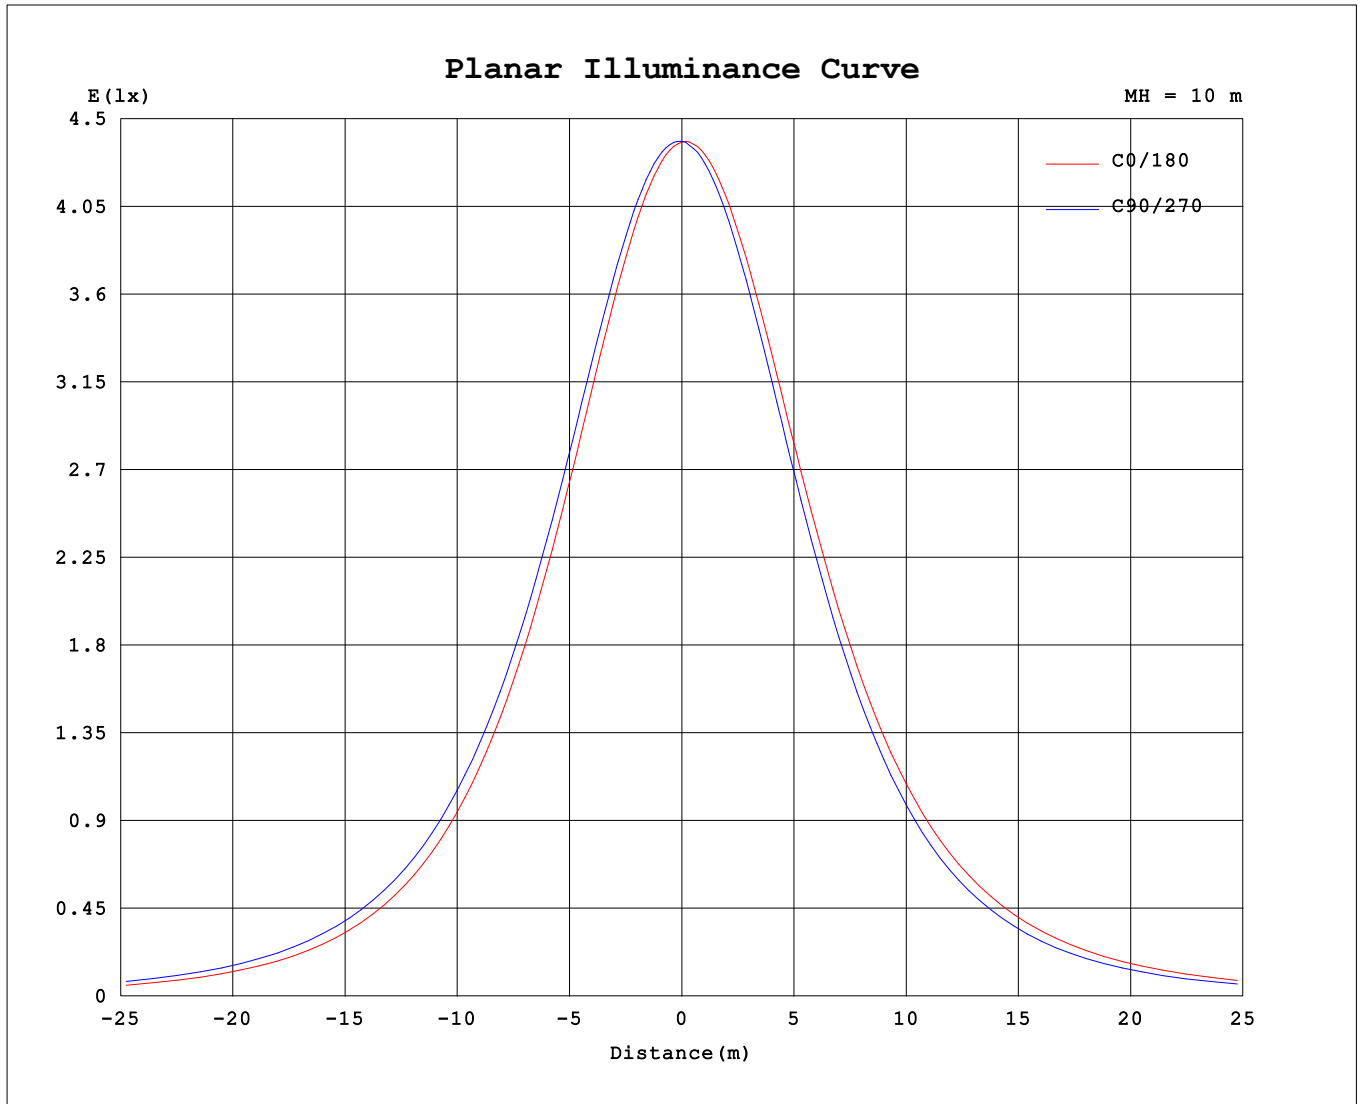

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2024-09-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity: 65.0%
 Test Distance: 8.800m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:229.90V I:0.0714A P:15.492W PF:0.9436 Freq:49.99Hz Lamp Flux:1245x1 lm		
NAME: SGS SKU No.: 0017440191	TYPE:	WEIGHT:
SPEC.: 15W Slim Downlight, 3CCT DIMMABLE IP20 In Front DIM.:		SERIAL No.: 15W 4000K
MFR.: LIT by CARDI	SUR.: ϕ 0.174	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	90	180	270														
0	438	438	438	438														
5	433	438	439	435														
10	425	433	436	428														
15	412	425	428	416														
20	396	412	417	401														
25	376	396	402	382														
30	353	376	383	360														
35	327	353	361	335														
40	298	327	336	307														
45	267	299	308	277														
50	235	268	278	245														
55	201	236	246	212														
60	165	201	212	177														
65	130	166	177	141														
70	94.6	130	141	106														
75	61.0	94.2	105	71.4														
80	30.9	60.2	70.9	40.0														
85	5.56	29.4	39.4	12.6														
90	0.02	4.39	12.3	0.04														
95	0.05	0.07	0.04	0.05														
100	0.12	0.12	0.11	0.12														
105	0.20	0.20	0.18	0.21														
110	0.28	0.28	0.25	0.30														
115	0.36	0.35	0.35	0.38														
120	0.43	0.43	0.43	0.47														
125	0.51	0.52	0.52	0.56														
130	0.58	0.58	0.61	0.65														
135	0.64	0.65	0.69	0.73														
140	0.69	0.71	0.77	0.81														
145	0.76	0.76	0.85	0.86														
150	0.81	0.82	0.93	0.93														
155	0.88	0.88	1.00	0.99														
160	0.94	0.94	1.06	1.05														
165	1.00	1.00	1.12	1.09														
170	1.05	1.06	1.18	1.14														
175	1.11	1.12	1.19	1.16														
180	1.18	1.18	1.19	1.17														

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-09-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks: