

1-Piece Fixing Ties with Arrowhead, with Wings in the Strap

1-Piece Fixing Ties with Arrowhead, with Wings in the Strap


This range of fixing ties is ideal for use in many different industries, including automotive, aerospace and panel building. The T80RSF6.5FW features a detent that fits securely into the profile of the tubing which prevents from lateral movement and slipping.

Features and benefits

- Easy to assemble without the need for a tool
- Arrowhead simply locks into place
- Supporting legs provide a secure and firm fixing when space is limited
- Bundle runs central across fixing point
- Cable tie head always situated in defined position



Designed to secure cables with parallel bundling the T80RSF6.5F offers a simple and secure fixing.

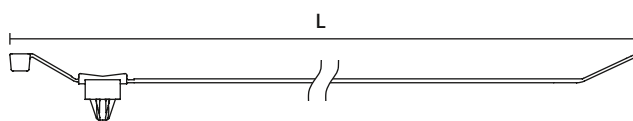

T80RSF6.5F

PART DESCRIPTION	Drawing	Hole Ø (FH)	Panel Thickness	Width (W)	Length (L)	Bundle Ø max.	N
T80RSF6.5FW-PA66HS-BK		6.3 - 6.5	0.6 - 3.0	4.7	209.0	50.0	355
T80SSF6.5F-PA66HIRHS-BK		6.3 - 6.5	0.6 - 3.0	4.6	179.0	43.0	300
T80RSF6.5F-PA46-GY		6.3 - 6.5	0.6 - 3.0	4.7	209.0	50.0	355
T80RSF6.5F-PA66HS-BK		6.3 - 6.5	0.6 - 3.0	4.7	209.0	50.0	355
T80SSF6.5F-PA46-GY		6.3 - 6.5	0.6 - 3.0	4.6	179.0	43.0	225
T80RSF6.5F-PA66-BK		6.3 - 6.5	0.6 - 3.0	4.6	209.0	45.0	355

All dimensions in mm. Subject to technical changes.

1-Piece Fixing Ties with Arrowhead

1-Piece Fixing Ties with Arrowhead, without Wings and Disc, for round holes


The arrowhead design is usefull in areas with limited space.

Features and benefits

- Easy to assemble without the need for a tool
- Fixing tie with arrowhead without wings
- Arrowhead simply locks into place
- Cable tie head always situated in defined position



The arrowhead design allows these fixing ties to be used in areas with limited space.



T30RSF

PART DESCRIPTION	Hole Ø (FH)	Panel Thickness	Width (W)	Length (L)	Bundle Ø max.	N
T30RSF-PA66HS-BK	4.7 - 5.6	0.9 - 2.4	3.6	158.0	32.0	135
T30RSF(U)-PA66HS-BK	4.7 - 5.6	0.9 - 2.4	3.6	161.0	31.0	135
T50RSF(E)-PA66-BK	6.2 - 6.4	2.9 - 3.0	4.6	210.0	44.0	225
T50RSF(U)-PA66HIRHSUV-BK	6.4 - 7.1	1.0 - 3.5	4.7	210.0	44.0	225

All dimensions in mm. Subject to technical changes.



Material Specification Overview

MATERIAL	Material Shortcut	Operating Temperature	Colour*	Flammability
Aluminium alloy	AL	-40 °C to +180 °C	Natural (NA)	
Chloroprene Rubber	CR	-20 °C to +80 °C	Black (BK)	
Ethylene Tetrafluoroethylene (Tefzel®)	E/TFE	-80 °C to +170 °C	Blue (BU)	UL 94 V0
Polyacetal	POM	-40 °C to +90 °C, (+110 °C, 500 h)	Natural (NA)	UL 94 HB
Polyamide 11	PA11	-40 °C to +85 °C, (+105 °C, 500 h)	Black (BK)	UL 94 HB
Polyamide 11, UV-resistant	PA11W	-40 °C to +105 °C	Black (BK)	UL 94 HB
Polyamide 12	PA12	-40 °C to +85 °C, (+105 °C, 500 h)	Black (BK)	UL 94 HB
Polyamide 4.6	PA46	-40 °C to +130 °C, (+150 °C, 5000 h; +195 °C, 500 h)	Natural (NA), Grey (GY)	UL 94 V2
Polyamide 6	PA6	-40 °C to +80 °C	Black (BK)	UL 94 V2
Polyamide 6, glass-fibre reinforced	PA6GF30	-40 °C to +100 °C	Black (BK)	UL 94 HB
Polyamide 6, high impact modified	PA6HIR	-40 °C to +80 °C	Black (BK)	UL 94 HB
Polyamide 6, high impact modified, heat stabilised	PA6HIRHS	-80 °C to +110 °C	Black (BK)	UL 94 HB
Polyamide 6.6	PA66	-40 °C to +85 °C, (+105 °C, 500 h)	Black (BK), Natural (NA)	UL 94 V2
Polyamide 6.6, glass-fibre reinforced	PA66GF13	-40 °C to +105 °C	Black (BK)	UL 94 HB
Polyamide 6.6, glass-fibre reinforced	PA66GF15	-40 °C to +105 °C	Black (BK)	UL 94 HB
Polyamide 6.6, heat and UV stabilised	PA66HSUV	-40 °C to +105 °C	Black (BK), Natural (NA)	UL 94 V2
Polyamide 6.6, heat and UV stabilised	PA66HSW	-40 °C to +105 °C	Black (BK)	UL 94 V2
Polyamide 6.6, heat stabilised	PA66HS	-40 °C to +105 °C	Black (BK), Natural (NA)	UL 94 V2
Polyamide 6.6, high impact modified	PA66HIR	-40 °C to +80 °C, (+105 °C, 500 h)	Black (BK)	UL 94 HB
Polyamide 6.6, high impact modified, heat and UV stabilised	PA66HIRHSUV	-40 °C to +110 °C	Black (BK)	UL 94 HB
Polyamide 6.6, high impact modified, heat and UV stabilised (only for cable ties for Autotool System 3080)	PA66HIRHSUV	-40 °C to +95 °C, (+105 °C, 5000 h; +145 °C, 500 h)	Black (BK), Natural (NA)	UL 94 HB
Polyamide 6.6, high impact modified, heat and UV stabilised	PA66HIRHSW	-40 °C to +110 °C	Black (BK)	UL 94 HB
Polyamide 6.6, high impact modified, heat stabilised	PA66HIRHS	-40 °C to +105 °C	Black (BK)	UL 94 HB
Polyamide 6.6, high impact modified, scan black	PA66HIR(S)	-40 °C to +80 °C, (+105 °C, 500 h)	Black (BK)	UL 94 HB

Tefzel® is a registered trademark of DuPont. General linguistic usage for cable ties made from raw material E/TFE is Tefzel®-Tie. In addition to Tefzel® from DuPont HellermannTyton also uses equivalent E/TFE raw material from other suppliers.

*Further colours available on request.

 = Minimum Loop Tensile Strength for Cable Ties (Newton)

MATERIAL	Material Shortcut	Operating Temperature	Colour*	Flammability
Polyamide 6.6, UV resistant	PA66W	-40 °C to +85 °C, (+105 °C, 500 h)	Black (BK)	UL 94 V2
Polyamide 6.6, UV-stabilised	PA66UV	-40 °C to +85 °C	Black (BK), Natural (NA)	UL 94 V2
Polyamide 6.6, with metal particles	PA66MP	-40 °C to +85 °C, (+105 °C, 500 h)	Blue (BU)	UL 94 HB
Polyamide 6.6, with metal particles	PA66MP+	-40 °C to +85 °C	Blue (BU)	not flame retardant
Polyamide 6.6 V0	PA66V0	-40 °C to +85 °C	White (WH)	UL 94 V0
Polyaryletherketone	PAEK	-55 °C to +200 °C	Beige (BGE)	UL 94 V0
Polyester	SP	-50 °C to +150 °C	Black (BK)	
Polyetheretherketone	PEEK	-55 °C to +240 °C	Beige (BGE)	UL 94 V0
Polyethylene	PE	-40 °C to +50 °C	Black (BK), Grey (GY)	UL 94 HB
Polyolefin	PO	-40 °C to +90 °C	Black (BK)	UL 94 V0
Polyphenylene Sulfide	PPS	-40 °C to +150 °C	Black (BK), Grey (GY)	UL 94 V0
Polypropylene, Ethylene Propylene Diene Terpolymer rubber free of Nitrosamine	PP, EPDM	-20 °C to +95 °C	Black (BK)	UL 94 HB
Polypropylene 20% Talkum	PPT20	-40 °C to +65 °C	Black (BK)	UL 94 HB
Polypropylene with metal particles	PPMP	-40 °C to +115 °C	Blue (BU)	UL 94 HB
Polypropylene with metal particles	PPMP+	-40 °C to +85 °C	Blue (BU)	not flame retardant
Polyvinylidene Fluoride	PVDFX	-50 °C to +150 °C	Natural (NA)	UL 94 V0
Polyvinylchloride	PVC	-10 °C to +70 °C	Black (BK), Natural (NA)	UL 94 V0
Stainless Steel	SS304, SS316	-80 °C to +538 °C	Natural (NA)	non-burning
Thermoplastic Polyurethane	TPU	-40 °C to +85 °C	Black (BK)	UL 94 HB

Tefzel® is a registered trademark of DuPont. General linguistic usage for cable ties made from raw material E/TFE is Tefzel®-Tie. In addition to Tefzel® from DuPont HellermannTyton also uses equivalent E/TFE raw material from other suppliers.

*Further colours available on request.



= Minimum Loop Tensile Strength
for Cable Ties (Newton)

Tip: Material shortcut is part of our Part Description name

Product series name (indicating tie type, clip and harness routing variant)

Material code

Colour code (details on page 326)

T50ROSEC5A-PA66HS/PA66HIRHS-BK