
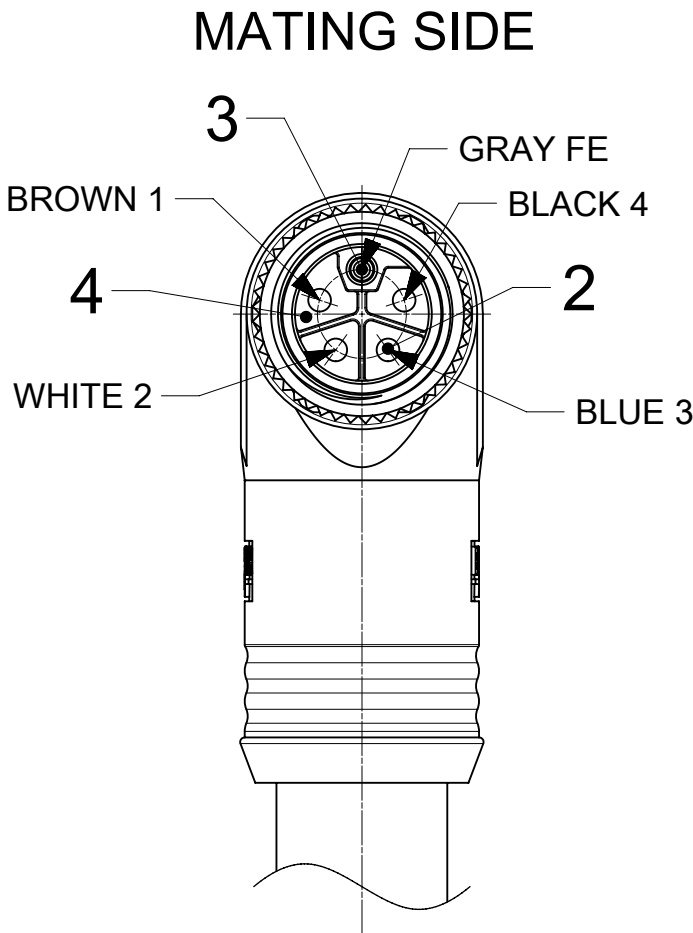


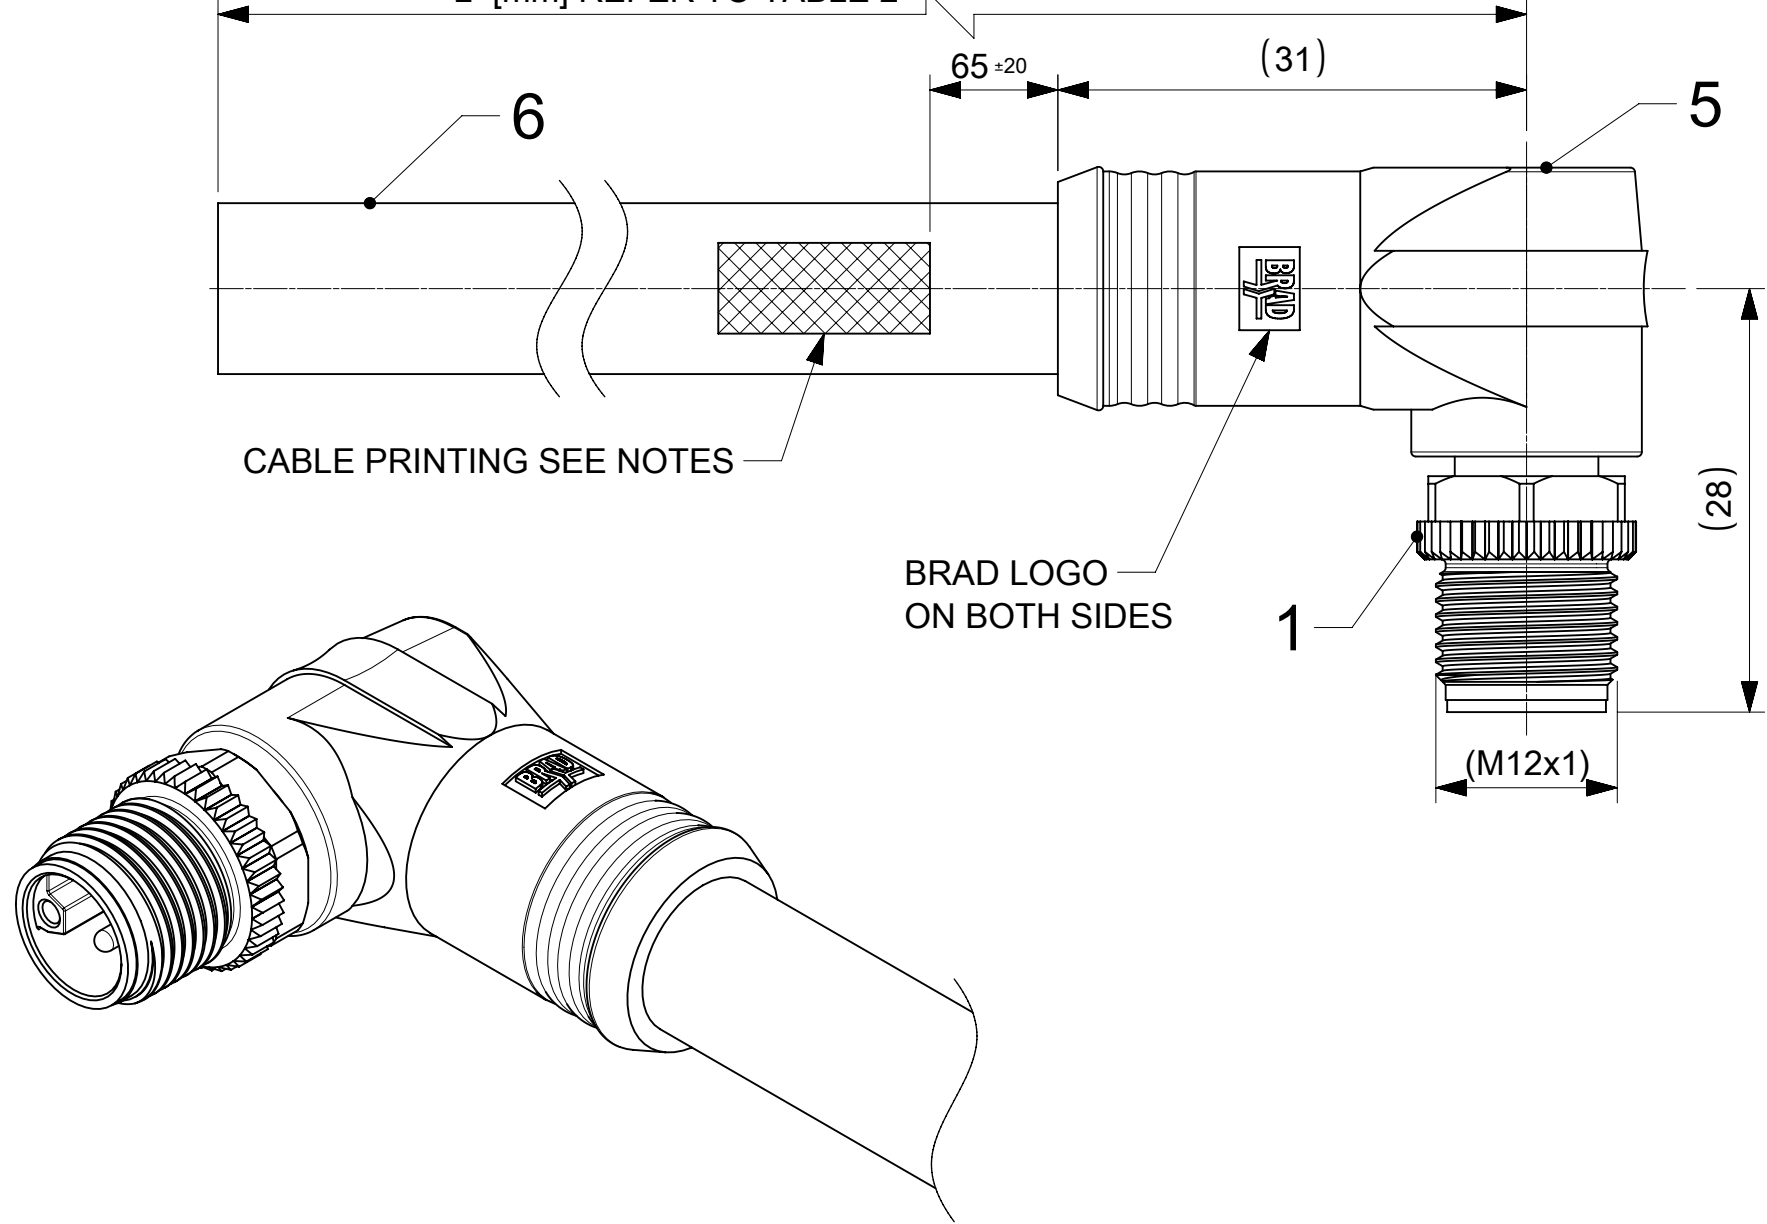

NOTES:

RATED VOLTAGE: MAX. 63V AC/DC
RATED CURRENT: MAX. 16A at 40°C (derating has to be considered)
IP RATING: IP67 (mated and locked condition)
TEMPERATURE RANGE: -25°C TO +85°C

CABLE PRINTING (sequence as shown below):
- MOLEX engineering no. (see page 2)
- MOLEX material no. (see page 2)
- MOLEX MAX. 63V AC/DC MAX. 16 A USR
- MOLEX AND DATE OF MANUFACTURING (YY=YEAR; WW=WEEK): MXYWW
- Not for current interrupting
- PROFINET 24V Power 4x2,5 + FE

PART ACCORDING PRODUCT SPEC: 1205010169
PACKAGING ACCORDING PACKAGING SPEC: 1201202000

TABLE 1

POS	DESCRIPTION	MATERIAL	FINISH
1	NUT M12 MA	BRASS	Ni
2	CONTACT 15 MA	BRASS	Au
3	CONTACT 15 FE	BRASS	Au
4	INSERT	PA	GREY
5	OVERMOLD	TPE	BLACK
6	CABLE 5x2.5 D11.3 WSOR	PUR	GREY
OPTIONAL 7	ID CARRIER	-	-

FUNCTIONAL SYMBOLS FA = 0 FE = 0 FE = 0 DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																
	DIMENSION UNITS		SCALE		CURRENT REV DESC: UPDATED ATTRIBUTE TO GENERAL MARKET IN ECTR			molex									
	mm		2:1														
	GENERAL TOLERANCES (UNLESS SPECIFIED)				CSE M12 5P LC MA RA WSOR GY XM UNSH												
	ANGULAR TOL ± 1.0 °																
	4 PLACES		±		EC NO: 735577			2023/01/12									
	3 PLACES		±		DRWN: MARUTD												
	2 PLACES		± 0.05		CHK'D: RSILLER												
	1 PLACE		± 0.3		APPR: RSILLER			2023/01/19									
	0 PLACES		± 0.5		INITIAL REVISION:			2020/01/29									
				DRWN: FDAFERNER													
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		DOCUMENT NUMBER		DOC TYPE		DOC PART		REVISION	
						A3-SIZE		120500		1205000221		PSD		000		A1	
										MATERIAL NUMBER		CUSTOMER				SHEET NUMBER	
										SEE TABLE 2		GENERAL MARKET				1 OF 2	

ENGINEERING NO - NUMERICAL CODE (Available parts see PART LIST table. Other parts available upon request).

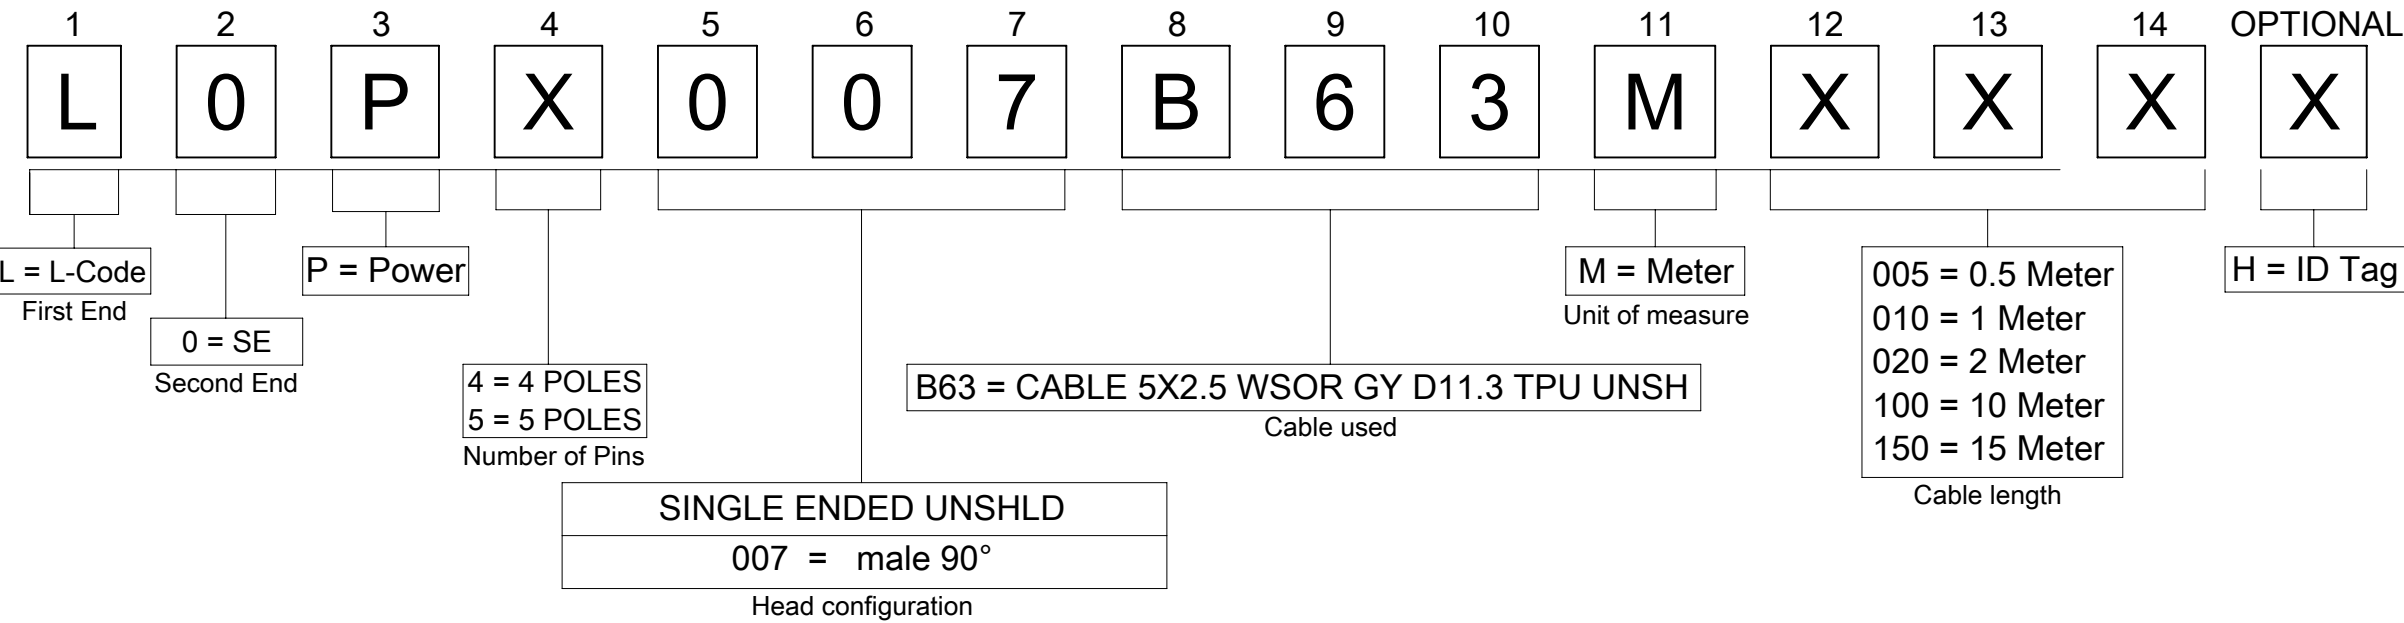


TABLE 2

NOMINAL SECTION 2,5mm²			
MATERIAL NO.	ENGINEERING NO.	L [mm]	TOLERANCE [mm]
1205000221	L0P5007B63M010	1000	+40
1205000222	L0P5007B63M020	2000	+60
1205000223	L0P5007B63M030	3000	+60
1205000224	L0P5007B63M050	5000	+60
1205000225	L0P5007B63M100	10000	+80
1205000226	L0P5007B63M150	15000	+140
1205000227	L0P5007B63M200	20000	+140

FUNCTIONAL SYMBOLS

FA

=

0

FE

=

0

FE

=

0

DIVISIONAL SYMBOLS

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS

mm

SCALE

1:1

GENERAL TOLERANCES (UNLESS SPECIFIED)

ANGULAR TOL

±

1.0 °

4 PLACES

±

3 PLACES

±

2 PLACES

±

0.05

1 PLACE

±

0.3

0 PLACES

±

0.5

CURRENT REV DESC: UPDATED ATTRIBUTE TO GENERAL MARKET IN ECTR

EC NO: 735577

DRWN: MARUTD

CHK'D: RSILLER

APPR: RSILLER

2023/01/12

2023/01/19

2023/01/19

INITIAL REVISION:

DRWN: FDAFERNER

APPR: RSILLER

2020/01/29

2021/03/15

DOCUMENT NUMBER

1205000221

DOC TYPE

PSD

DOC PART

000

REVISION

A1

THIRD ANGLE PROJECTION

DRAWING

SERIES

MATERIAL NUMBER

CUSTOMER

SHEET NUMBER

A3-SIZE

120500

GENERAL MARKET

2 OF 2