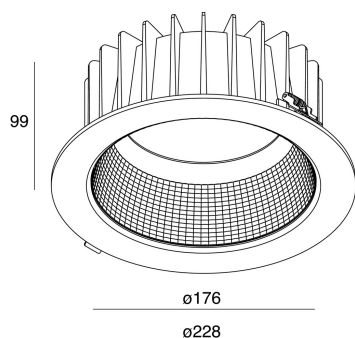


Features

Use: Indoor
Type of installation: RECESSED INTO PLASTERBOARD
Emission: DIRECT
Optics: SPOT
Beam: 36°
Colour: SHINY CHROME
Dimming: ON/OFF
Emergency: WITH ACCESSORY
H: 99mm
Ø: Ø228
D: 200-210mm
Warranty: 5 years
Weight: 1.6kg

Tech data

Luminaire input power: 34W
Luminaire luminous flux: 2998lm
Luminous flux in emergency: 1h: 13% / 3h: 5%
IP: 40
Insulation class: II
No. of driver per product: 1
Supply voltage: 220-240V 50/60Hz
UGR: <19
SELV: Si

Source

Light source: LED
Source power: 32W
Colour temperature: 3000K
CRI: >90
LED lifespan: 50000h L80 B50

Compliance

CEI EN 60598-1:2021 + A11:2023, CEI EN 60598-2-1:2022, CEI EN 60598-2-2:2012

Standards

Photobiological risk: RISK GROUP 1 Certified fixture in RISK GROUP 1 (Low Risk)-The fixture does not pose a hazard due to normal behavioral limitations on exposure - in accordance with CEI EN 62471:2010-01, IEC TR 62778:2014.
CAM edilizia: The product complies with the requirements for public buildings, ministerial decree of 23rd June 2022 n.256.

Average luminance


Average luminance limits for DSE workstation 65°(in accordance to EN 12464-1:2012).


[View more product info](#)

COMPLETION ACCESSORIES

	SLIM: ADATT.PER FORO 240MM / 250MM	11814.01
---	------------------------------------	----------

EMERGENCY ACCESSORIES

	THE PANEL 2: EMER.INC.3H 10/54VDC	1020A5.99
--	-----------------------------------	-----------

	THE PANEL 2: EMER.INC.1H 10/54VDC	1020A4.99
--	-----------------------------------	-----------