




Contact characteristics

Number of poles	Nr.	4	
Rated insulation voltage U_i IEC/EN	V	1000	
Rated impulse withstand voltage U_{imp}	kV	8	
Operational frequency	min	Hz	25
	max	Hz	400
IEC Conventional free air thermal current $I_{th} \leq 40^{\circ}\text{C}$	A	1000	
Operational current I_e	AC-1 ($\leq 40^{\circ}\text{C}$)	A	1000
	AC-1 ($\leq 55^{\circ}\text{C}$)	A	850
	AC-1 ($\leq 70^{\circ}\text{C}$)	A	700
	AC-4 (400V)	A	260
Rated operational power AC-1 ($T \leq 40^{\circ}\text{C}$)	230V	kW	350
	400V	kW	600
	500V	kW	750
	690V	kW	1000
IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 1 poles in series	75V	A	800
	110V	A	460
	220V	A	--
	330V	A	--
	460V	A	--
IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 2 poles in series	75V	A	800
	110V	A	800
	220V	A	700
	330V	A	--
	460V	A	--
IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 3 poles in series	75V	A	800
	110V	A	800
	220V	A	800
	330V	A	700
	460V	A	--
IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 4 poles in series	75V	A	800
	110V	A	800
	220V	A	800
	330V	A	750
	460V	A	700
IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 1 poles in series	75V	A	800
	110V	A	460


	220V	A	--
	330V	A	--
	460V	A	--
IEC max current Ie in DC3-DC5 with L/R ≤ 15ms with 2 poles in series			
	75V	A	800
	110V	A	800
	220V	A	700
	330V	A	--
	460V	A	--
IEC max current Ie in DC3-DC5 with L/R ≤ 15ms with 3 poles in series			
	75V	A	800
	110V	A	800
	220V	A	800
	330V	A	650
	460V	A	--
IEC max current Ie in DC3-DC5 with L/R ≤ 15ms with 4 poles in series			
	75V	A	800
	110V	A	800
	220V	A	800
	330V	A	650
	460V	A	700
Short-time allowable current for 10s (IEC/EN60947-1)		A	5600
Protection fuse	gG (IEC)	A	1000
Making capacity (RMS value)		A	6300
Breaking capacity at voltage	440V	A	6300
	500V	A	5600
	690V	A	5000
Resistance per pole (average value)		mΩ	0.14
Power dissipation per pole (average value)	Ith	W	140
	AC-3	W	56
Tightening torque for terminals			
	min	Nm	55
	max	Nm	55
	min	Ibin	40.6
	max	Ibin	40.6
Tightening torque for coil terminal			
	min	Nm	1
	max	Nm	1
	min	Ibin	0.74
	max	Ibin	0.74
Max number of wires simultaneously connectable		Nr.	2
Conductor section	AWG/Kcmil		
	max		2x 900 kcmil
Power terminal protection according to IEC/EN 60529			IP00
Mechanical features			
Operating position	normal allowable		Vertical plan ±30°
Fixing			Screw

Weight	g	26
Operations		
Mechanical life	cycles	5000000
Electrical life	cycles	700000
Safety related data		
Performance level B10d according to EN/ISO 13489-1		
	rated load	cycles 700000
	mechanical load	cycles 5000000
Mirror contacts according to IEC/EN 60947-4-1 annex F		Yes
EMC compatibility		yes
AC coil operating		
Rated AC voltage at 50/60Hz, 60Hz		
	min	V 380
	max	V 415
AC operating voltage		
of 50/60Hz coil powered at 50Hz		
pick-up		
	min	%Us 80
	max	%Us 110
drop-out		
	min	%Us 20
	max	%Us 60
of 50/60Hz coil powered at 60Hz		
pick-up		
	min	%Us 80
	max	%Us 110
drop-out		
	min	%Us 20
	max	%Us 60
of 60Hz coil powered at 60Hz		
pick-up		
	min	%Us 80
	max	%Us 110
drop-out		
	min	%Us 20
	max	%Us 60
AC average coil consumption at 20°C		
of 50/60Hz coil powered at 50Hz		
	in-rush	VA 400
	holding	VA 18
of 50/60Hz coil powered at 60Hz		
	in-rush	VA 400
	holding	VA 18
Dissipation at holding ≤20°C 50Hz	W	18
DC coil operating		
DC rated control voltage		
	min	V 380
	max	V 415
max		V 415
DC operating voltage		
pick-up		
	min	%Us 80
	max	%Us 110
drop-out		

		min	%Us	20
		max	%Us	60
Average coil consumption ≤20°C				
		in-rush	W	400
		holding	W	18
Max cycles frequency				
Mechanical operation			cycles/h	1200
Operating times				
Average time for Us control				
in AC				
		Closing NO		
		min	ms	110
		max	ms	180
		Opening NO		
		min	ms	60
		max	ms	100
in DC				
		Closing NO		
		min	ms	110
		max	ms	180
		Opening NO		
		min	ms	60
		max	ms	100
UL technical data				
Rated operational voltage AC (UL)			V	600
General USE				
Contactor				
		AC current	A	1000
Short-circuit protection fuse, 600V				
Standard fault				
		Short circuit current	kA	18
		Fuse rating	A	1500
		Fuse class		L
Ambient conditions				
Temperature				
Operating temperature				
		min	°C	-50
		max	°C	70
Storage temperature				
		min	°C	-60
		max	°C	80
Max altitude			m	3000
Resistance & Protection				
Pollution degree				3
Dimensions				

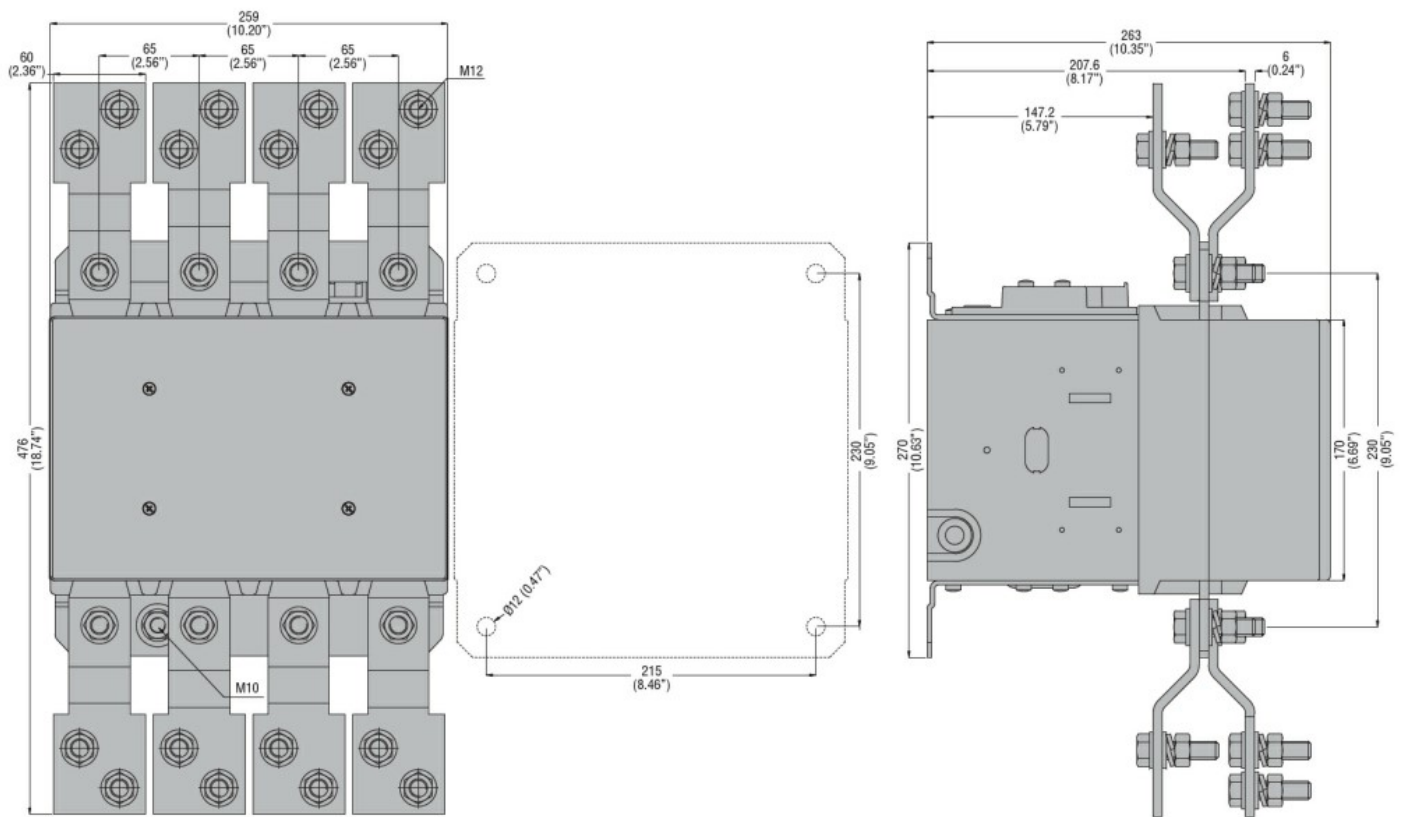

Wiring diagrams

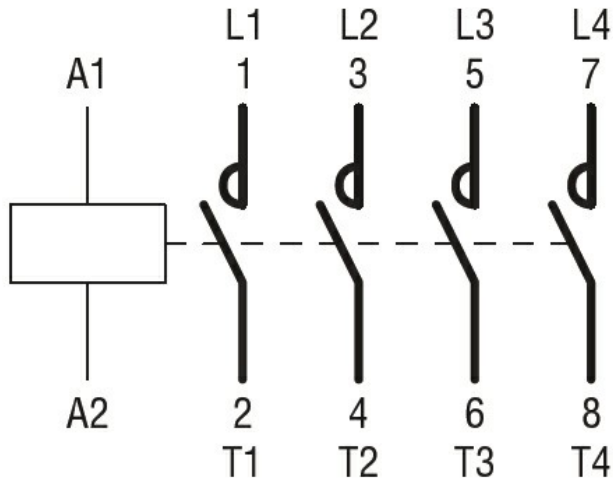

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1
CSA C22.2 n° 60947-4-1
IEC/EN 60947-1
IEC/EN 60947-4-1
UL 60947-1
UL 60947-4-1

Certificates

CCC
cULus
EAC

ETIM classification

ETIM 8.0

EC000066 -
Power contactor,
AC switching