




Contact characteristics

Number of poles	Nr.	4
Operational current Ie		
	AC-4 (400V)	A 260
Making capacity (RMS value)	A	6300
Breaking capacity at voltage		
	440V	A 6300
	500V	A 5600
	690V	A 5000

UL technical data


Rated operational voltage AC (UL)	V	600
-----------------------------------	---	-----

Dimensions

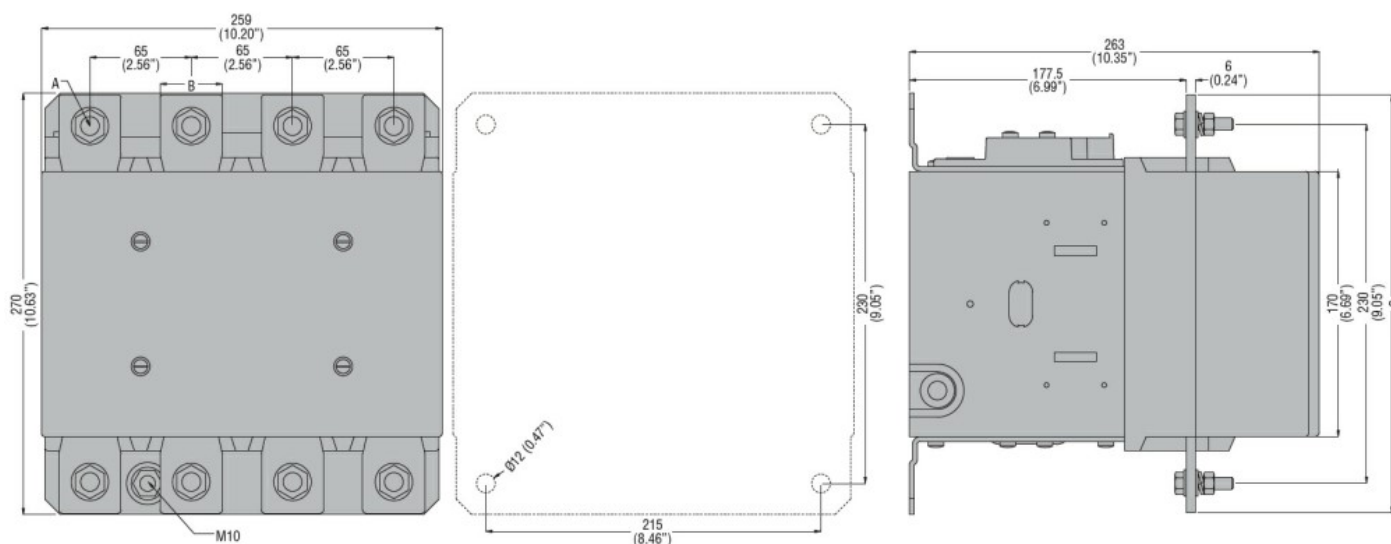

CONTACTOR TYPE	A	B	C
B500	M10	35 (1.38")	265 (10.43")
B630	M12	40 (1.57")	270 (10.63")

Wiring diagrams

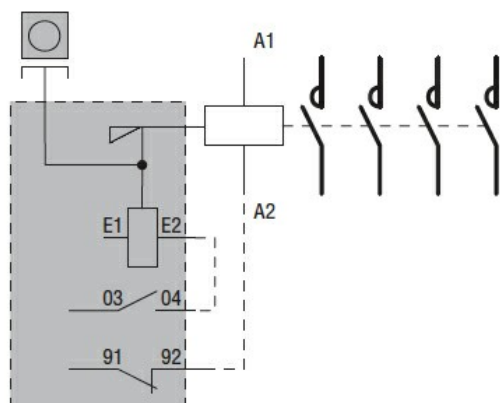

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN 60947-1

IEC/EN 60947-4-1

UL 60947-1

UL 60947-4-1

Certificates

cULus