



Electrical features

Maximum operating current ($\leq 440V$) A 20

Contact characteristics

Operational current Ie

	AC-1 ($\leq 40^{\circ}C$)	A	20
	AC-1 ($\leq 55^{\circ}C$)	A	18
	AC-1 ($\leq 60^{\circ}C$)	A	15

Rated operational power AC-1 ($T \leq 40^{\circ}C$)

	230V	kW	8
	400V	kW	14
	500V	kW	16
	690V	kW	22

UL technical data


UL/CSA General Use A 20

Mechanical features


Terminals type Clamp screw

Weight g 365

Dimensions

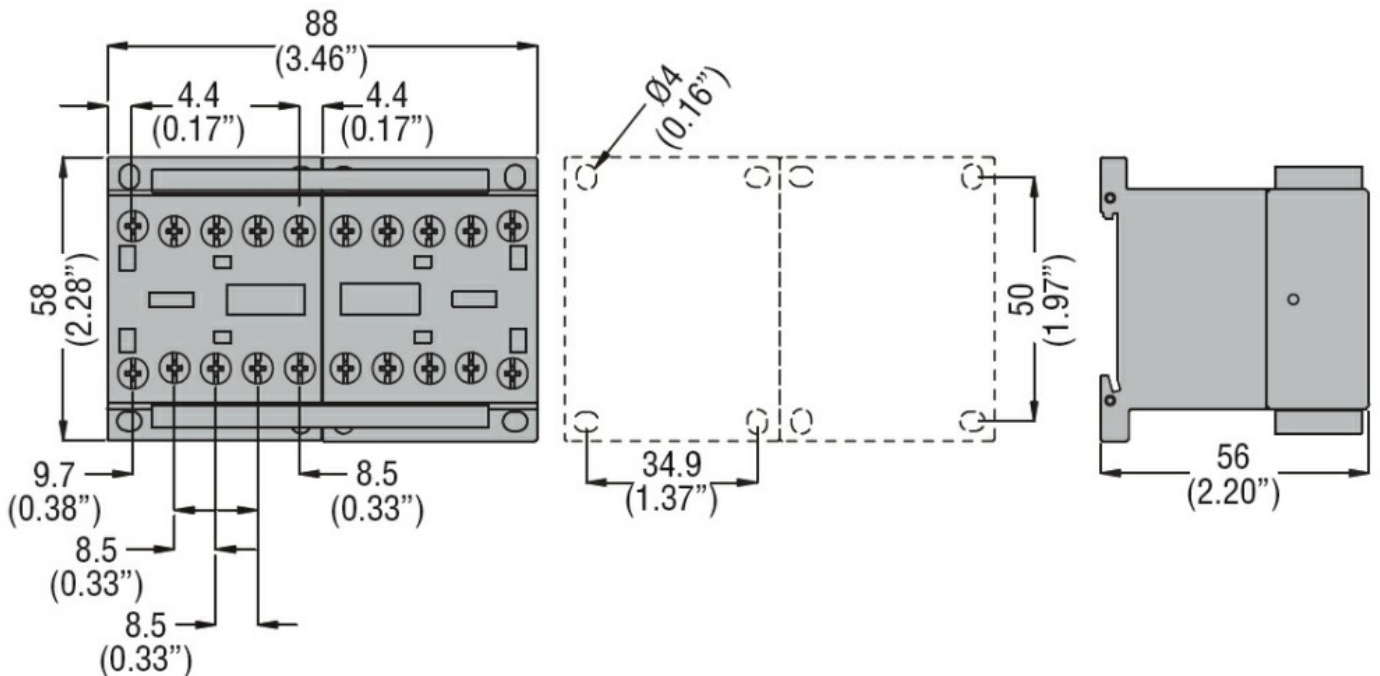

Wiring diagrams

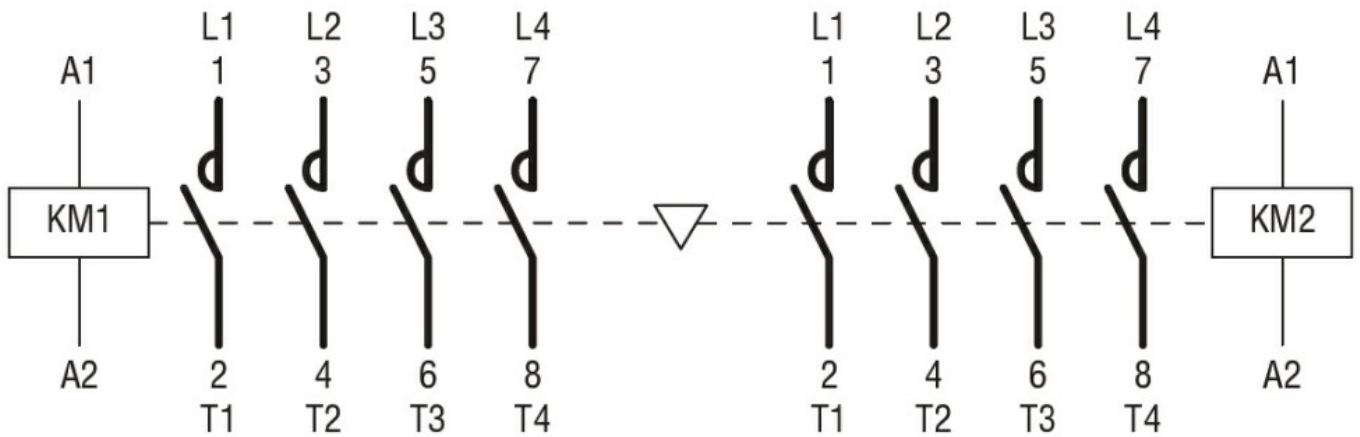

Certifications and compliance

Compliance

IEC/EN 60947-1
 IEC/EN 60947-4-1
 UL508 CSA C22.2 n° 14

Certificates

cULus

ETIM classification

ETIM 8.0

EC000010 -
 Combination of
 contactors