



**Electrical features**

Maximum operating current ( $\leq 440V$ )	A	9
---	---	---

**Contact characteristics**

Operational current Ie	AC-3 ( $\leq 440V \leq 55^{\circ}C$ )	A	9
------------------------	---------------------------------------	---	---

Rated operational power AC-3 ( $T \leq 55^{\circ}C$ )	230V	kW	2.2
	400V	kW	4
	415V	kW	4.3
	440V	kW	4.5
	500V	kW	5
	690V	kW	5

Built-in auxiliary contacts	NO	0
	NC	1

**UL technical data**


Maximum UL/CSA horsepower ratings single-phase	110V-120V	HP	0.5
	220V-240V	HP	1.5

Maximum UL/CSA horsepower ratings three-phase, 3-pole	200V-208V	HP	2
	220V-240V	HP	3
	440V-480V	HP	5
	550V-600V	HP	5


**Mechanical features**

Terminals type	Clamp screw
Weight	g 394

**Dimensions**

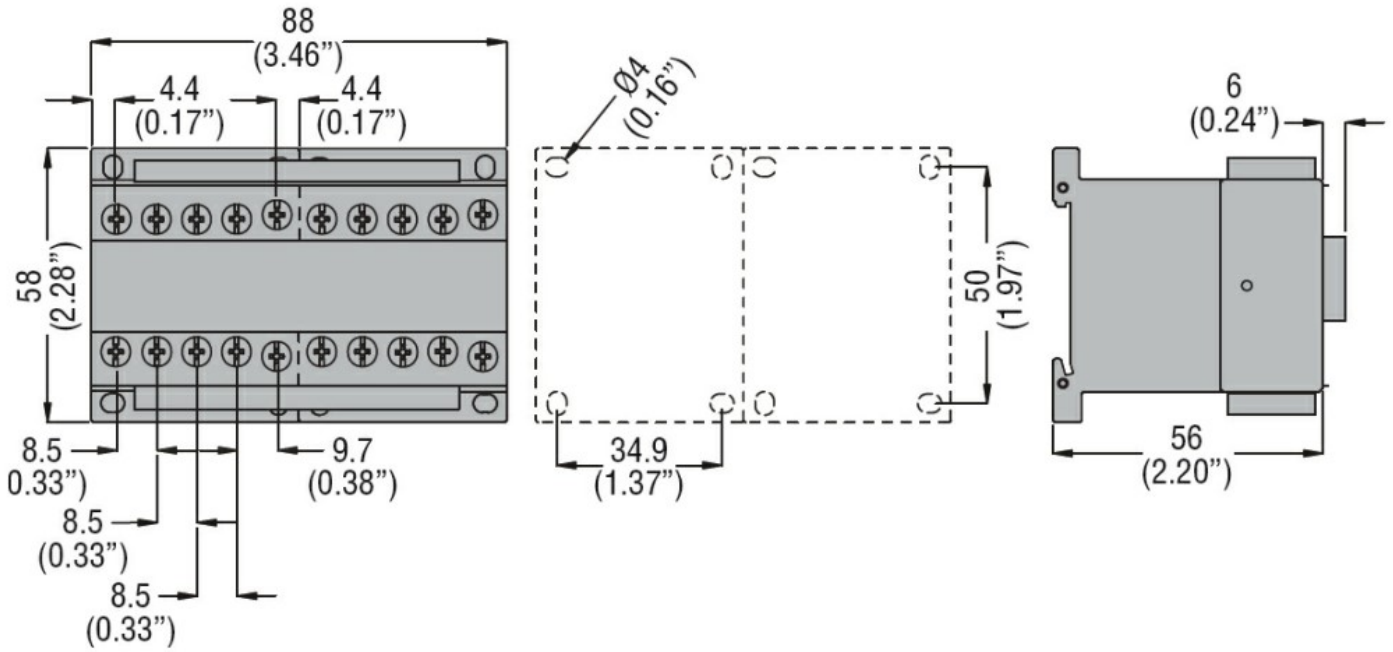

Wiring diagrams

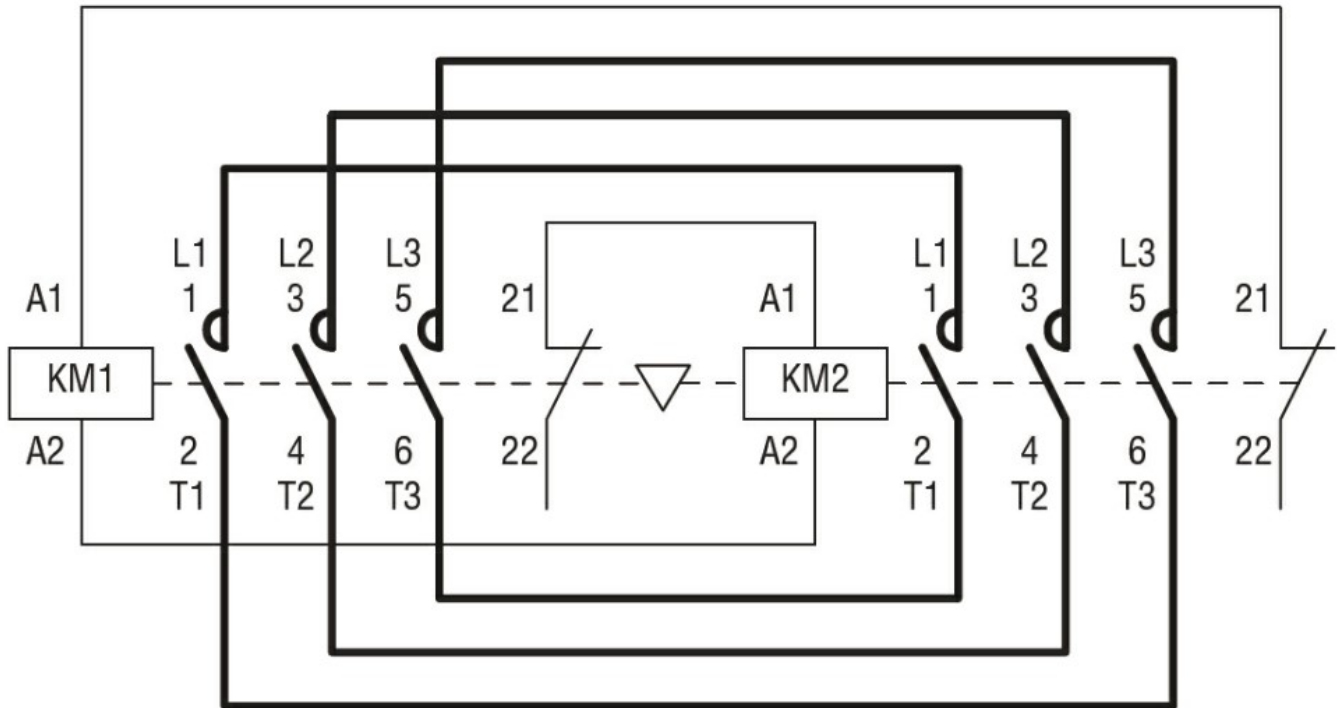

Certifications and compliance

Compliance

IEC/EN 60947-1  
IEC/EN 60947-4-1  
UL508 CSA C22.2 n° 14

Certificates

cULus

ETIM classification

ETIM 8.0

EC001037 -  
Motor  
starter/Motor  
starter  
combination