



**Electrical features**

Maximum operating current ( $\leq 440V$ ) A 9

**Contact characteristics**

Operational current Ie AC-3 ( $\leq 440V \leq 55^{\circ}C$ ) A 9

Rated operational power AC-3 ( $T \leq 55^{\circ}C$ )

|      |    |     |
|------|----|-----|
| 230V | kW | 2.2 |
| 400V | kW | 4   |
| 415V | kW | 4.3 |
| 440V | kW | 4.5 |
| 500V | kW | 5   |
| 690V | kW | 5   |

Built-in auxiliary contacts

|    |   |
|----|---|
| NO | 0 |
| NC | 1 |

**UL technical data**

Maximum UL/CSA horsepower ratings single-phase

|           |    |     |
|-----------|----|-----|
| 110V-120V | HP | 0.5 |
| 220V-240V | HP | 1.5 |

Maximum UL/CSA horsepower ratings three-phase, 3-pole


|           |    |   |
|-----------|----|---|
| 200V-208V | HP | 2 |
| 220V-240V | HP | 3 |
| 440V-480V | HP | 5 |
| 550V-600V | HP | 5 |

**Mechanical features**


Terminals type Clamp screw

Weight g 460

**Dimensions**

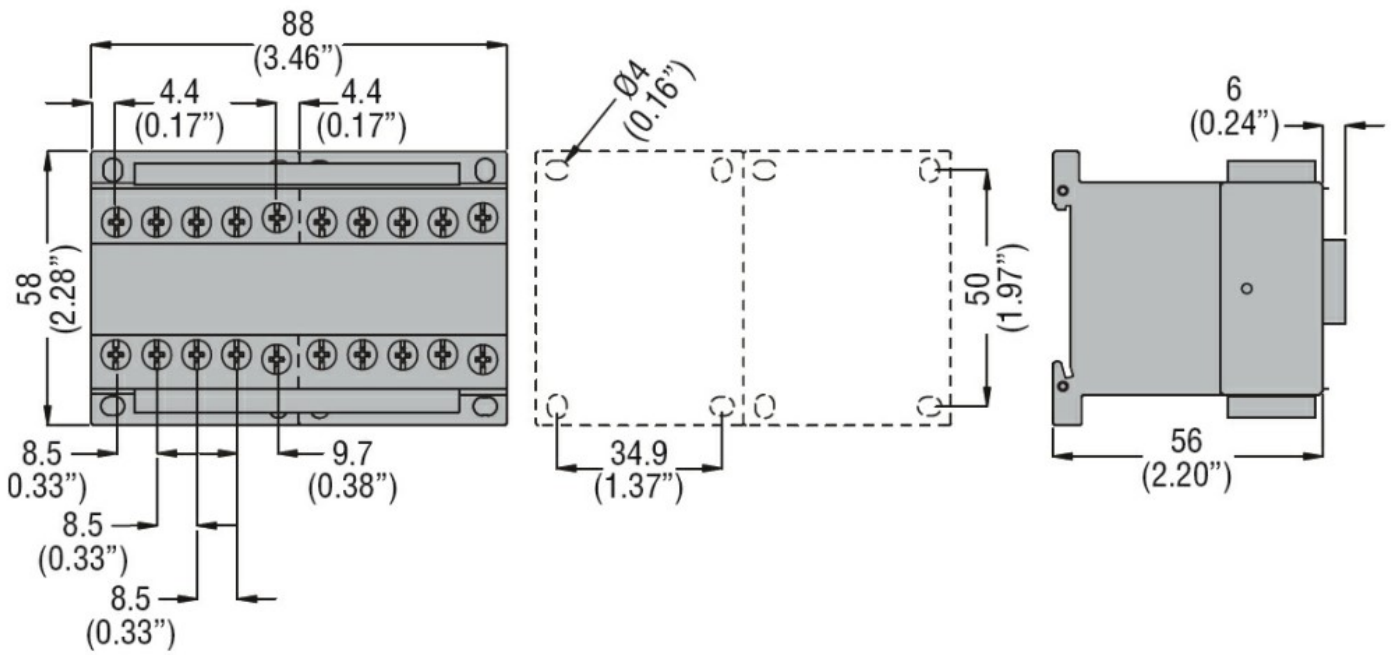

Wiring diagrams

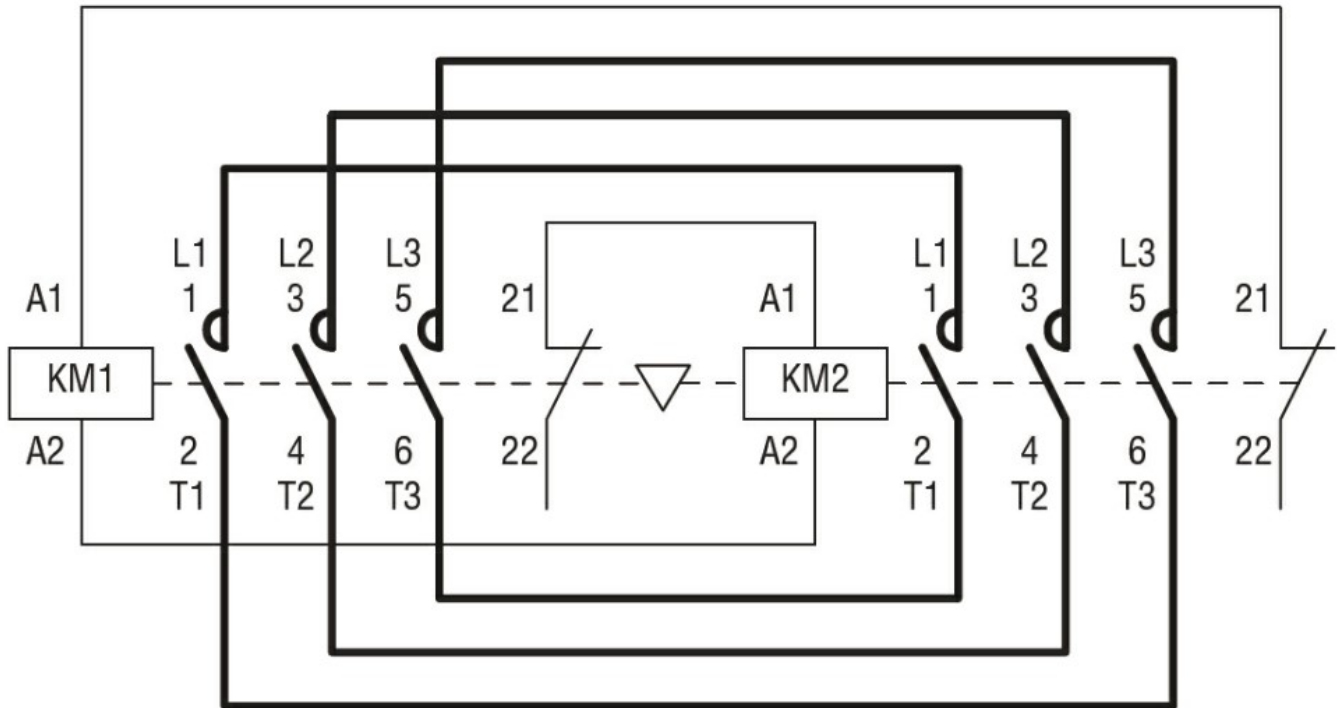

Certifications and compliance

Compliance

IEC/EN 60947-1  
IEC/EN 60947-4-1  
UL508 CSA C22.2 n° 14

Certificates

cULus

ETIM classification

ETIM 8.0

EC001037 -  
Motor  
starter/Motor  
starter  
combination