



Electrical features

Maximum operating current ($\leq 440V$) A 12

Contact characteristics

Operational current Ie AC-3 ($\leq 440V \leq 55^\circ C$) A 12

Rated operational power AC-3 ($T \leq 55^\circ C$)	Voltage	Power (kW)	Current (A)
	230V	3.2	12
	400V	5.7	12
	415V	6.2	12
	440V	5.5	12
	500V	5	12
	690V	5	12

Built-in auxiliary contacts

NO 0
NC 1

UL technical data

Maximum UL/CSA horsepower ratings single-phase	Voltage	HP	Current (A)
	110V-120V	0.5	12
	220V-240V	1.5	12

Maximum UL/CSA horsepower ratings three-phase, 3-pole


200V-208V	HP	3
220V-240V	HP	3
440V-480V	HP	7.5
550V-600V	HP	10

Mechanical features


Terminals type Clamp screw

Weight g 460

Dimensions

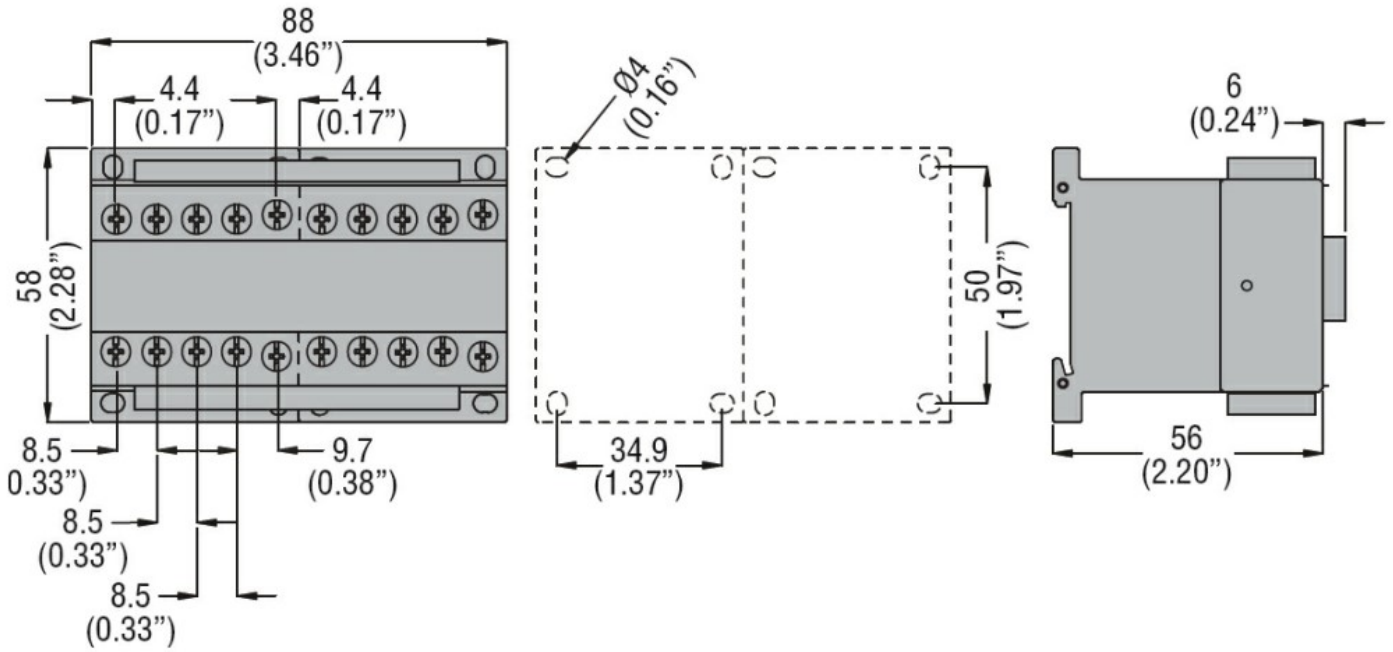

Wiring diagrams

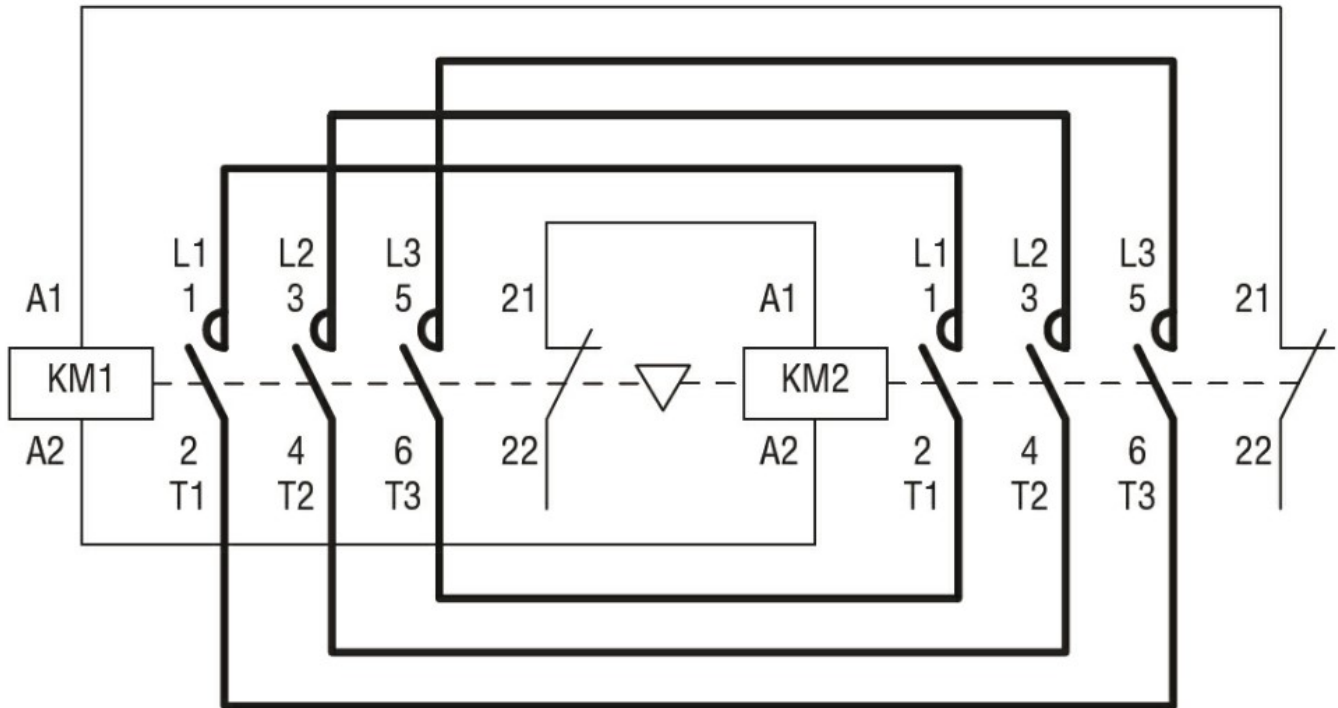

Certifications and compliance

Compliance

IEC/EN 60947-1
IEC/EN 60947-4-1
UL508 CSA C22.2 n° 14

Certificates

cULus

ETIM classification

ETIM 8.0

EC001037 -
Motor
starter/Motor
starter
combination