




Electrical features			
Maximum operating current ( $\leq 440V$ )		A	9
Contact characteristics			
Operational current Ie		A	9
	AC-3 ( $\leq 440V \leq 55^{\circ}C$ )	A	9
Rated operational power AC-3 ( $T \leq 55^{\circ}C$ )			
	230V	kW	2.2
	400V	kW	4
	415V	kW	4.3
	440V	kW	4.5
	500V	kW	5
	690V	kW	5
Built-in auxiliary contacts			
	NO		1
	NC		0
UL technical data			
Maximum UL/CSA horsepower ratings single-phase		HP	
	110V-120V	HP	0.5
	220V-240V	HP	1.5
Maximum UL/CSA horsepower ratings three-phase, 3-pole		HP	
	200V-208V	HP	2
	220V-240V	HP	3
	440V-480V	HP	5
	550V-600V	HP	5
Mechanical features			
Terminals type			Clamp screw
Weight		g	380
Dimensions			



Wiring diagrams

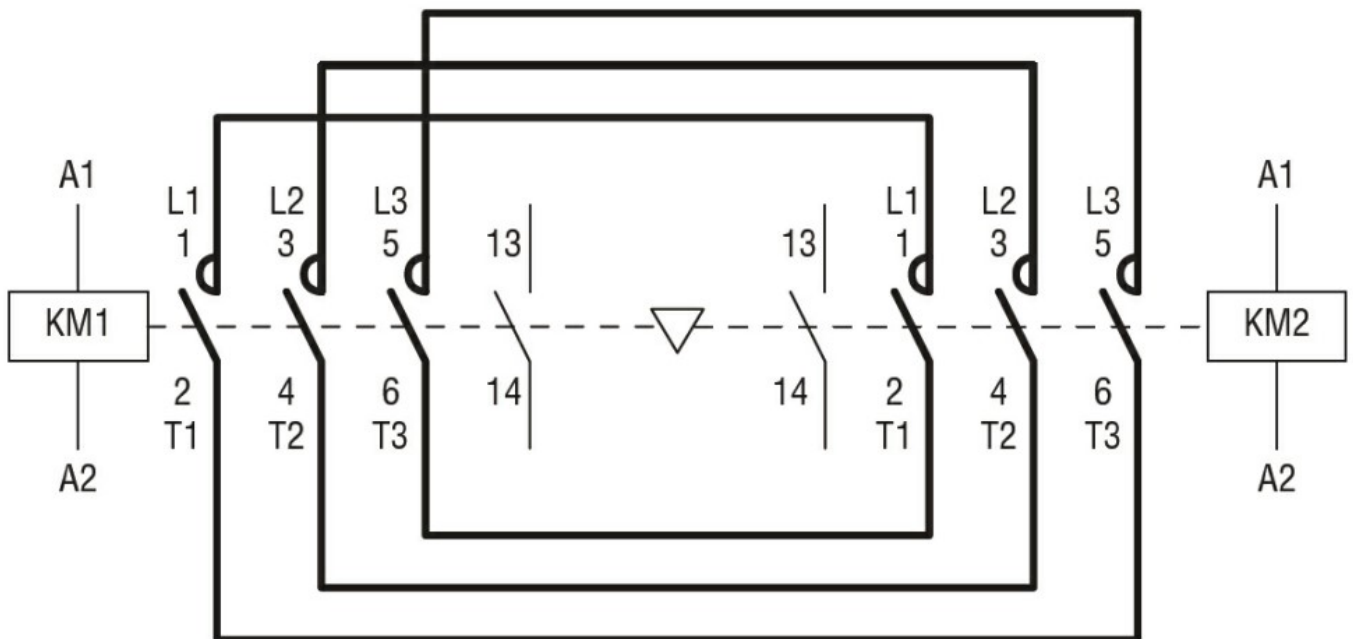

Certifications and compliance

Compliance

IEC/EN 60947-1  
IEC/EN 60947-4-1  
UL508 CSA C22.2 n° 14

Certificates

cULus

ETIM classification

ETIM 8.0

EC001037 -  
Motor  
starter/Motor  
starter  
combination

