





Electrical features			
Maximum operating current ( $\leq 440V$ )		A	12
Contact characteristics			
Operational current Ie		A	12
	AC-3 ( $\leq 440V \leq 55^{\circ}C$ )	A	12
Rated operational power AC-3 ( $T \leq 55^{\circ}C$ )	230V	kW	3.2
	400V	kW	5.7
	415V	kW	6.2
	440V	kW	5.5
	500V	kW	5
	690V	kW	5
Built-in auxiliary contacts		NO	1
		NC	0
UL technical data			
Maximum UL/CSA horsepower ratings single-phase	110V-120V	HP	0.5
	220V-240V	HP	1.5
Maximum UL/CSA horsepower ratings three-phase, 3-pole	200V-208V	HP	3
	220V-240V	HP	3
	440V-480V	HP	7.5
	550V-600V	HP	10
Mechanical features			
Terminals type			Clamp screw
Weight		g	380
Dimensions			

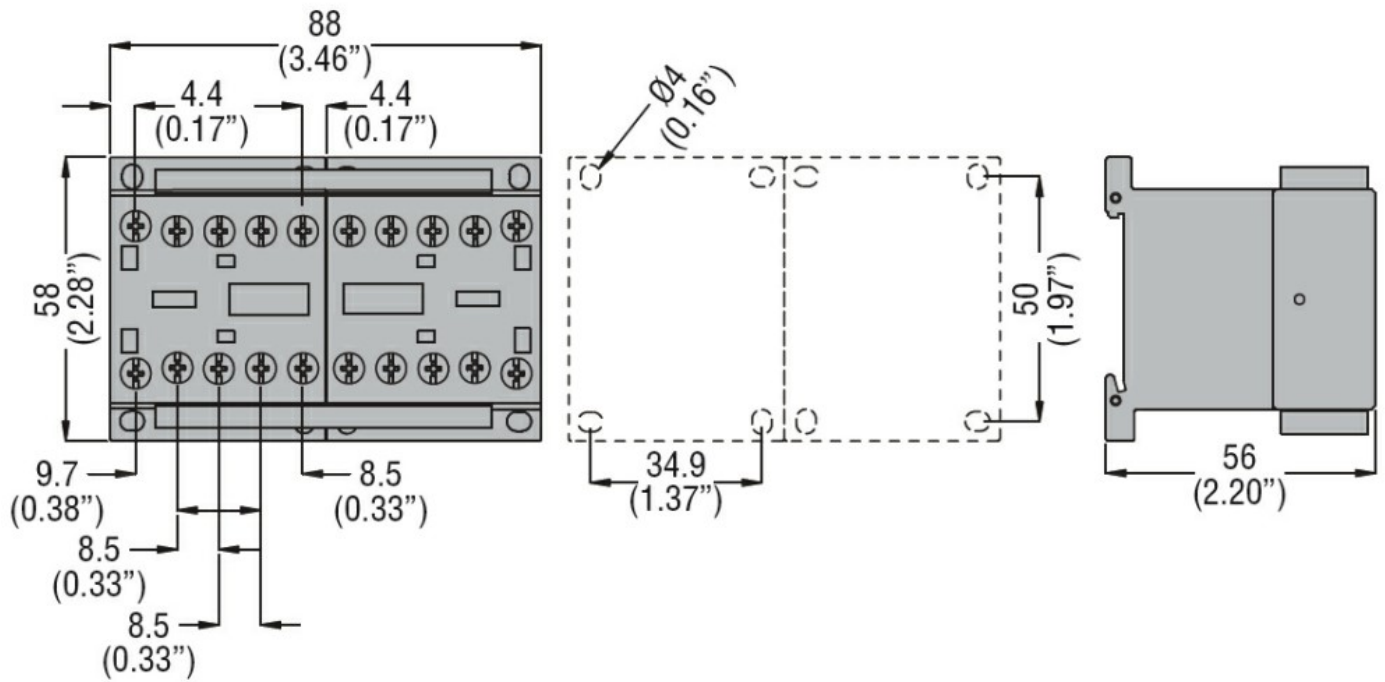

Wiring diagrams

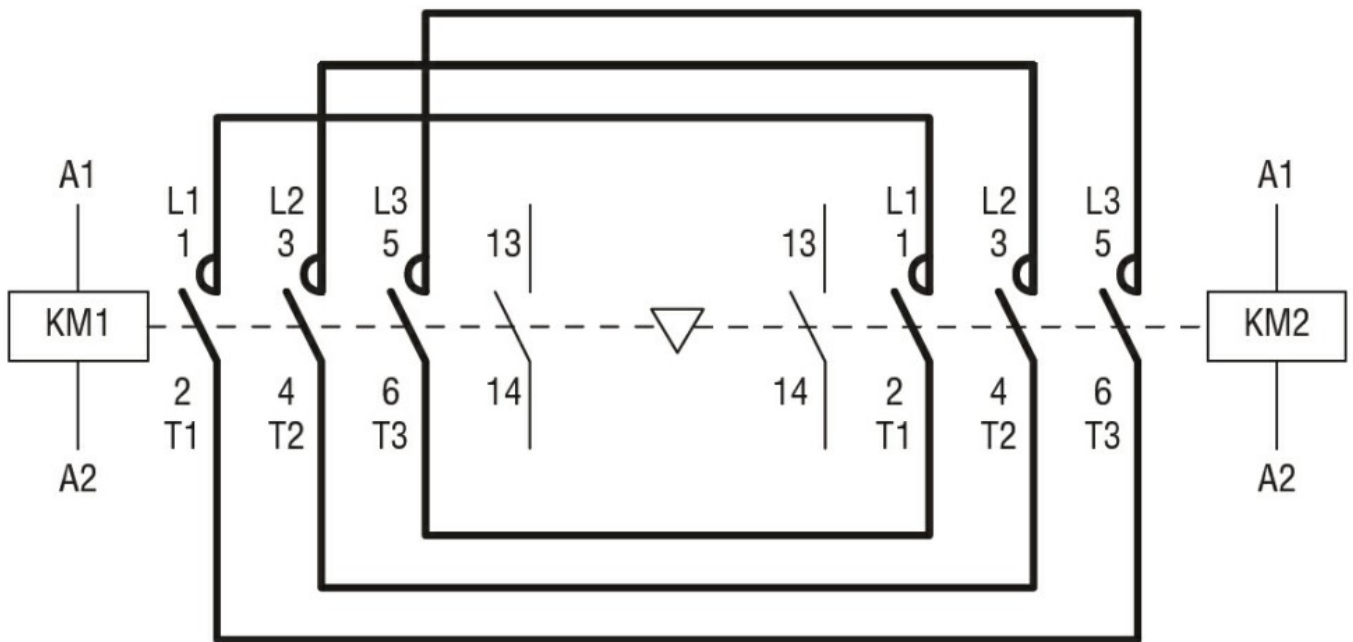

Certifications and compliance

Compliance

IEC/EN 60947-1  
 IEC/EN 60947-4-1  
 UL508 CSA C22.2 n° 14

Certificates

cULus

ETIM classification

ETIM 8.0

EC001037 -  
 Motor  
 starter/Motor  
 starter  
 combination

