




| Electrical features                                   |                                      |    |             |
|---|--------------------------------------|----|-------------|
| Maximum operating current ( $\leq 440V$ )             |                                      | A  | 12          |
| Contact characteristics                               |                                      |    |             |
| Operational current $I_e$                             |                                      | A  | 12          |
|   | AC-3 ( $\leq 440V \leq 55^\circ C$ ) | A  | 12          |
| Rated operational power AC-3 ( $T \leq 55^\circ C$ )  | 230V                                 | kW | 3.2         |
|   | 400V                                 | kW | 5.7         |
|   | 415V                                 | kW | 6.2         |
|   | 440V                                 | kW | 5.5         |
|   | 500V                                 | kW | 5           |
|   | 690V                                 | kW | 5           |
| Built-in auxiliary contacts                           |                                      | NO | 1           |
|   |                                      | NC | 0           |
| UL technical data                                     |                                      |    |             |
| Maximum UL/CSA horsepower ratings single-phase        | 110V-120V                            | HP | 0.5         |
|   | 220V-240V                            | HP | 1.5         |
| Maximum UL/CSA horsepower ratings three-phase, 3-pole | 200V-208V                            | HP | 3           |
|   | 220V-240V                            | HP | 3           |
|   | 440V-480V                            | HP | 7.5         |
|   | 550V-600V                            | HP | 10          |
| Mechanical features                                   |                                      |    |             |
| Terminals type  |                                      |    | Clamp screw |
| Weight  |                                      | g  | 445         |
| Dimensions  |                                      |    |             |



Wiring diagrams

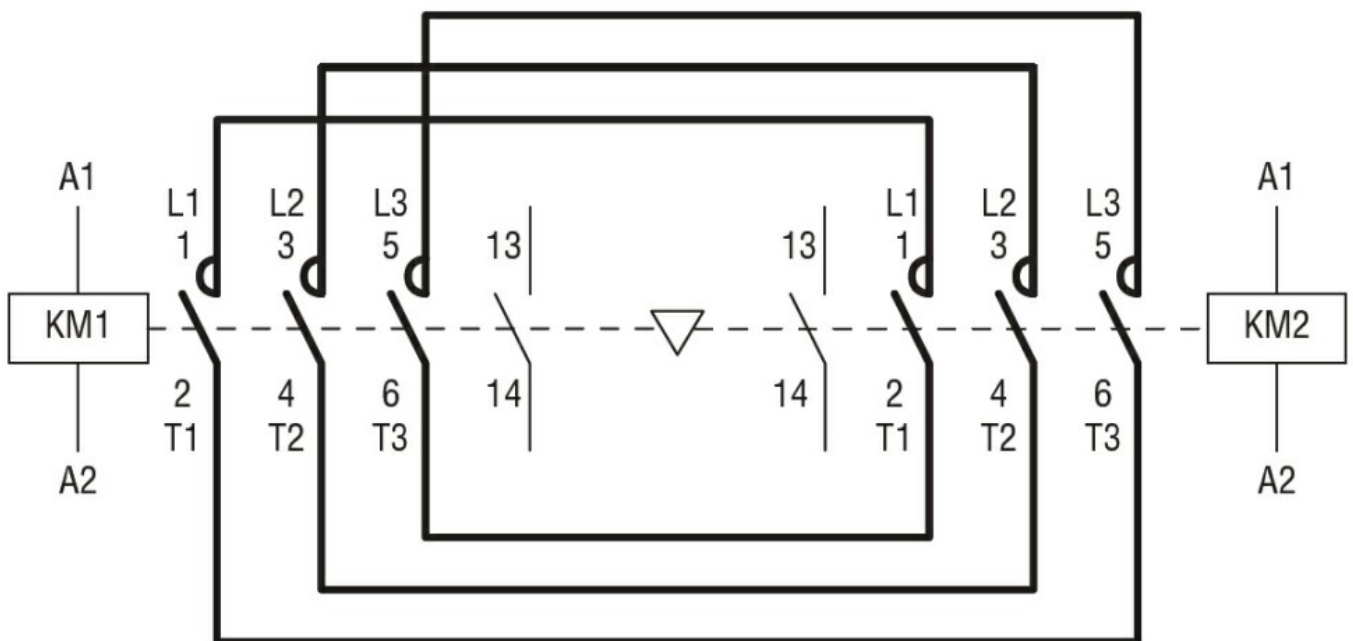

Certifications and compliance

Compliance

IEC/EN 60947-1  
IEC/EN 60947-4-1  
UL508 CSA C22.2 n° 14

Certificates

cULus

ETIM classification

ETIM 8.0

EC001037 -  
Motor  
starter/Motor  
starter  
combination

