



Contact characteristics

Tightening torque for terminals	min	Ibin	9
	max	Ibin	9
Tightening torque for coil terminal	min	Ibin	9
	max	Ibin	9


Mechanical features

Fixing	For reversing and changeover assemblies
--------	---


UL technical data

Rated operational voltage AC (UL)	V	600
-----------------------------------	---	-----

Dimensions

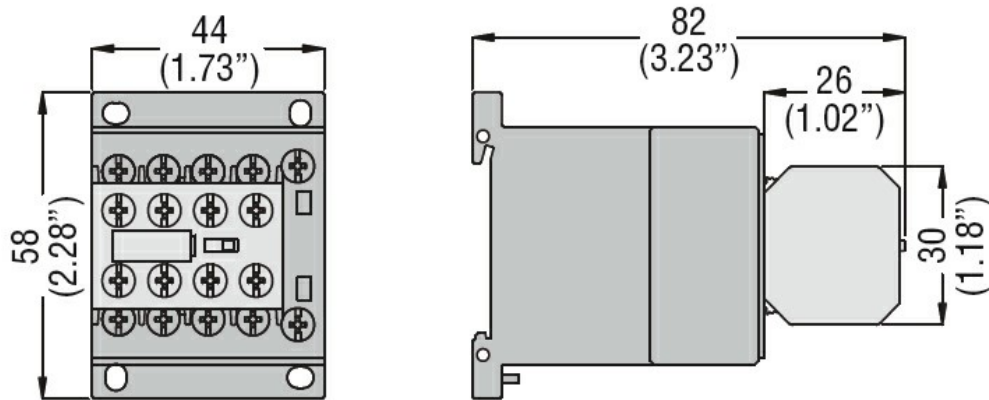

Wiring diagrams

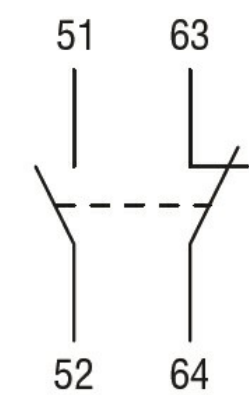

Certifications and compliance

Compliance	CSA C22.2 n° 60947-1
	CSA C22.2 n° 60947-5-1
	IEC/EN 60335-2-89
	IEC/EN 60947-1

IEC/EN 60947-5-1

UL 60947-1

UL 60947-5-1

Certificates

CCC

CSA C22.2 n. 60335-2-40:22 LZGH A2L

CSA C22.2 No. 60335-2-89:21 LZGH A2L

cULus

EAC

UL 60335-2-40 LZGH A2L

UL 60335-2-89 LZGH A2L

ETIM classification

ETIM 8.0

EC000041 -
Auxiliary contact
block