



Contact characteristics

Tightening torque for terminals

min	Ibin	9
max	Ibin	9

Tightening torque for coil terminal

min	Ibin	9
max	Ibin	9

Safety related data


Mirror contats according to IEC/EN 609474-4-1 annex F Yes

Mechanically linked contats according to IEC/EN 609474-5-1 annex L Yes


UL technical data

Rated operational voltage AC (UL) V 600

Dimensions

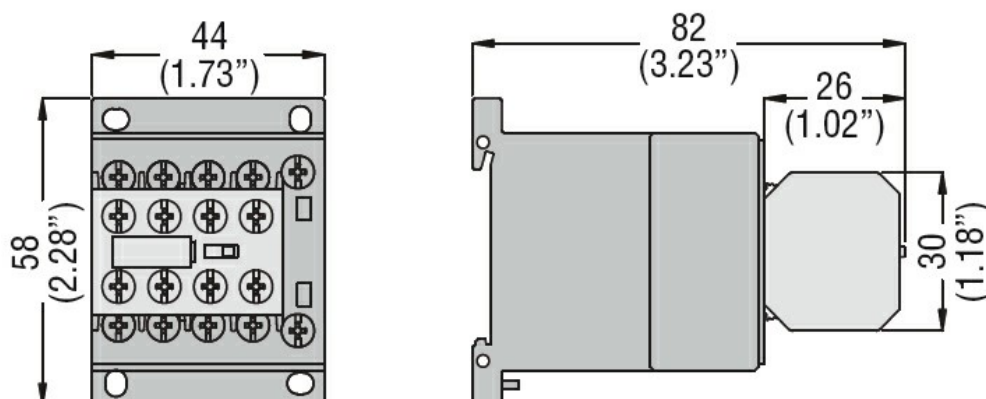

Wiring diagrams

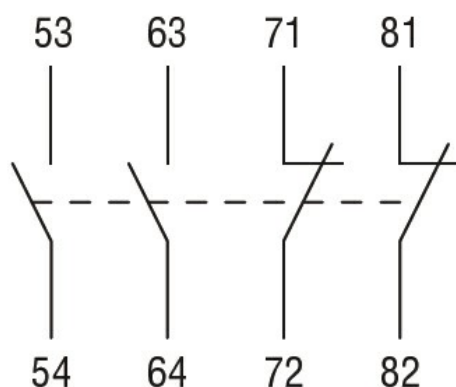

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-5-1

IEC/EN 60947-1

IEC/EN 60947-5-1

UL 60947-1

UL 60947-5-1

Certificates

CCC

cULus

EAC

ETIM classification

ETIM 8.0

EC000041 -
Auxiliary contact
block