



General characteristics

Number of poles	Nr.	3
Overvoltage category		III
Pollution degree		3
Frontal IP degree		IP20
Type of release		Thermal
Protection fuse	aM (IEC)	A 0.25
Phase failure detection		yes
Reset mode		Automatic

Power circuit characteristics

Rated insulation voltage U_i IEC/EN	V	690
Rated impulse withstand voltage U_{imp}	kV	8
Rated operational voltage	V	690
Operational frequency	min Hz	0
	max Hz	400
Operational current I_e	Operational current min	A 0.09
	Operational current max	A 0.15
Tripping class		10A
Test Button		Yes
Trip indicator		yes

Terminals

type		screw and washer
screw		M4
width	mm	9.8
tool		Phillips 2

Tightening torque for terminals

min	Nm	2.3
max	Nm	2.3
min	lbin	1.7
max	lbin	1.7

Conductor section

AWG/kcmil max	10
---------------	----

Auxiliary circuit characteristics

Auxiliary contacts

NO	Nr.	1
NC	Nr.	1

Auxiliary Rated insulation voltage U_i IEC/EN	V	690
Auxiliary Rated impulse withstand voltage U_{imp}	kV	6
Auxiliary Rated operational voltage	V	690
Operating current AC15	24V	A 1.5

	120V	A	1.5
	240V	A	0.75
IEC Conventional free air thermal current I _{th} ≤ 40°C		A	10

Terminals

Auxiliary circuit type			screw and washer
Auxiliary circuit screw			M3,5
Auxiliary circuit width	mm		8
Auxiliary circuit tool			Phillips 1

Conductor section

Auxiliary circuit Flexible w/o lug max	mm ²	2.5
Auxiliary circuit Flexible c/w lug max	mm ²	2.5

Tightening torque for terminals

Auxiliary circuit min	Nm	1
Auxiliary circuit max	Nm	1
Auxiliary circuit min	lbin	0.74
Auxiliary circuit max	lbin	0.74

UL/CSA and IEC/EN 60947-5-1 designation

C300-R300

Ambient conditions

Operating temperature

min	°C	-20
max	°C	55

Storage temperature

min	°C	-55
max	°C	70

Compensation temperature

min	°C	-15
max	°C	55

Max altitude

m 3000

Mechanical features

Operating position

normal allowable	Vertical plan ±30°
------------------	--------------------

Fixing

Direct mounting on BG06... BG09... BG12...

Weight


g 116

UL technical data


Full-load current (FLA) for three-phase AC motor

at 480V	A	0.15
at 600V	A	0.15

Dimensions

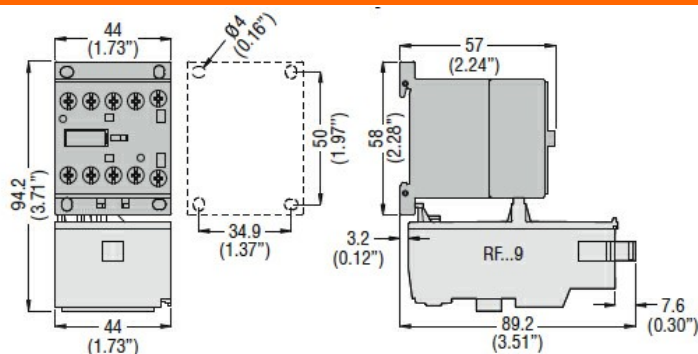

Wiring diagrams

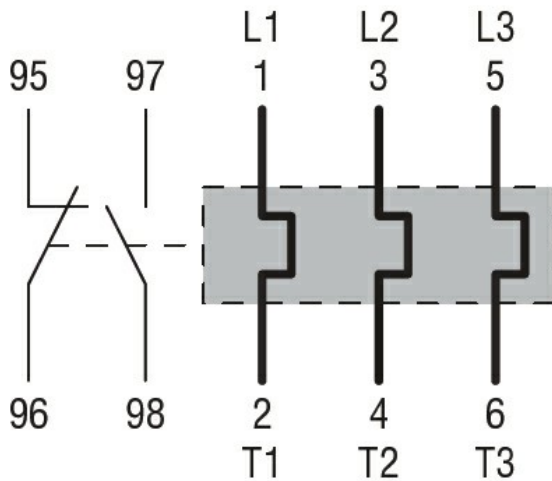

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-4-1

UL508

Certifications

CCC

CSA

cULus

EAC

ETIM classification

ETIM 8.0

EC000106 -
Thermal overload
relay