



Auxiliary contact characteristics

Rated insulation voltage U_i IEC/EN	V	690
Rated impulse withstand voltage U_{imp}	kV	4

Operational characteristics

IEC maximum current (I_{max})	A	63
-----------------------------------	---	----

Mechanical features

Tightening torque for terminals	min	Nm	2.5
	max	Nm	3

Conductor section

AWG/Kcmil	min		10
	max		4

Flexible c/w lug conductor section

min	mm ²	4
max	mm ²	25


Terminals

tool	Ph2
------	-----

Weight

g	48
---	----

Dimensions

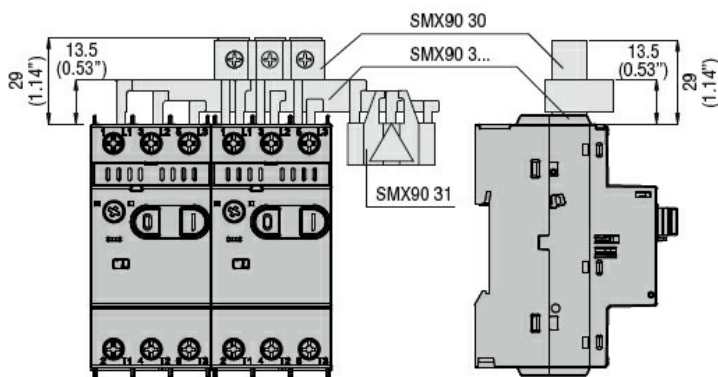

Certifications and compliance

Compliance

IEC/EN 60947-1
IEC/EN 60947-5-1

Certificates

EAC

ETIM classification