



**Auxiliary contact characteristics**

Rated insulation voltage $U_i$ IEC/EN	V	690
Rated impulse withstand voltage $U_{imp}$	kV	4


**Operational characteristics**

IEC maximum current ( $I_{max}$ )	A	63
-----------------------------------	---	----

**Mechanical features**

Weight	g	50
--------	---	----

**Dimensions**

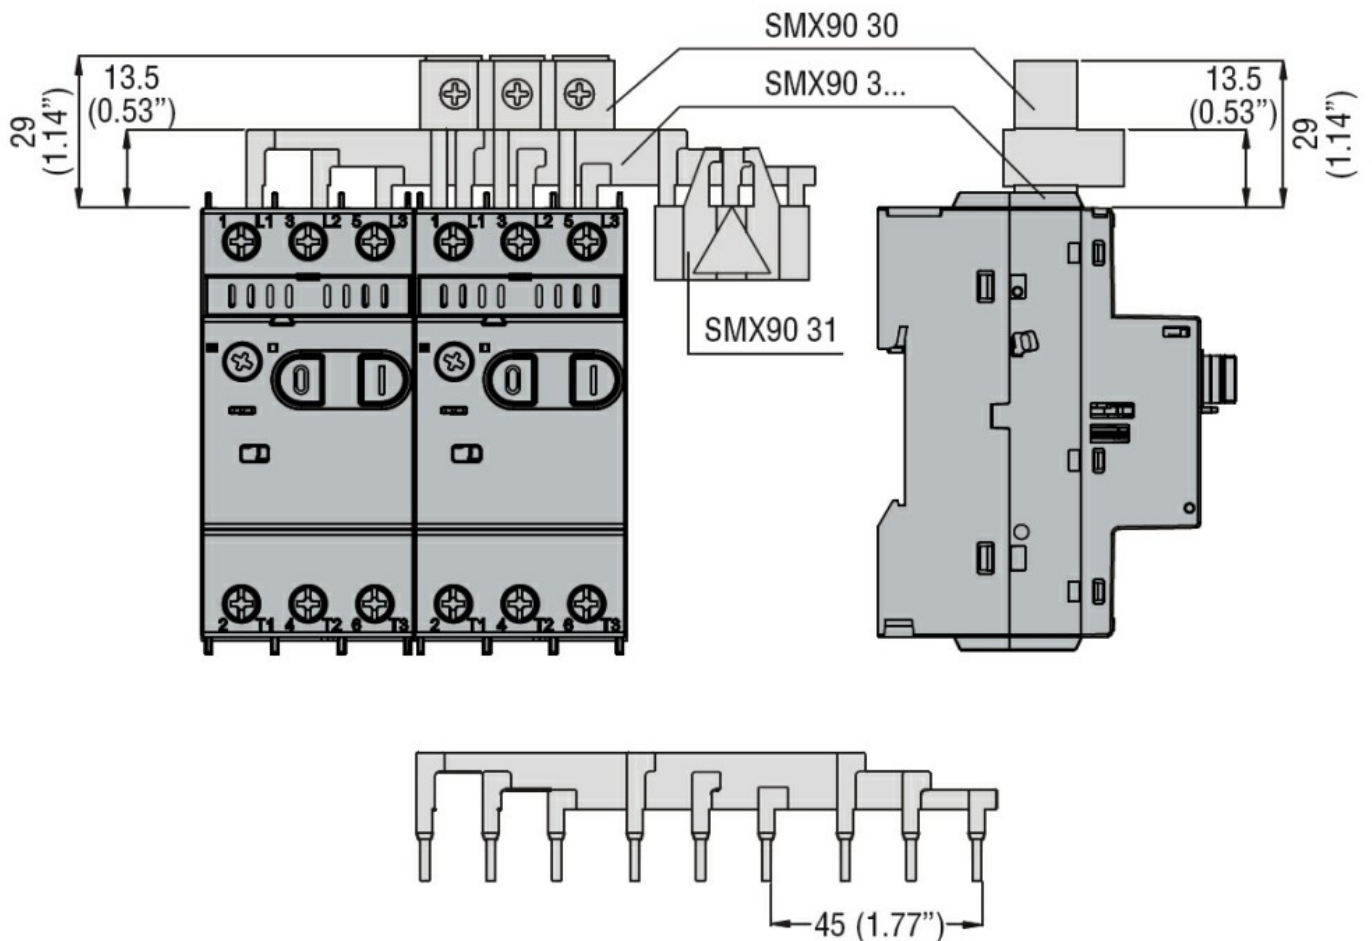

**Certifications and compliance**

**Compliance**

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-5-1

UL60947-1

UL60947-4-1

**Certificates**

cULus

EAC

ETIM classification