



Auxiliary contact characteristics

Rated insulation voltage U_i IEC/EN	V	690
Rated impulse withstand voltage U_{imp}	kV	4


Operational characteristics

IEC maximum current (I_{max})	A	63
-----------------------------------	---	----

Mechanical features

Weight	g	92
--------	---	----

Dimensions

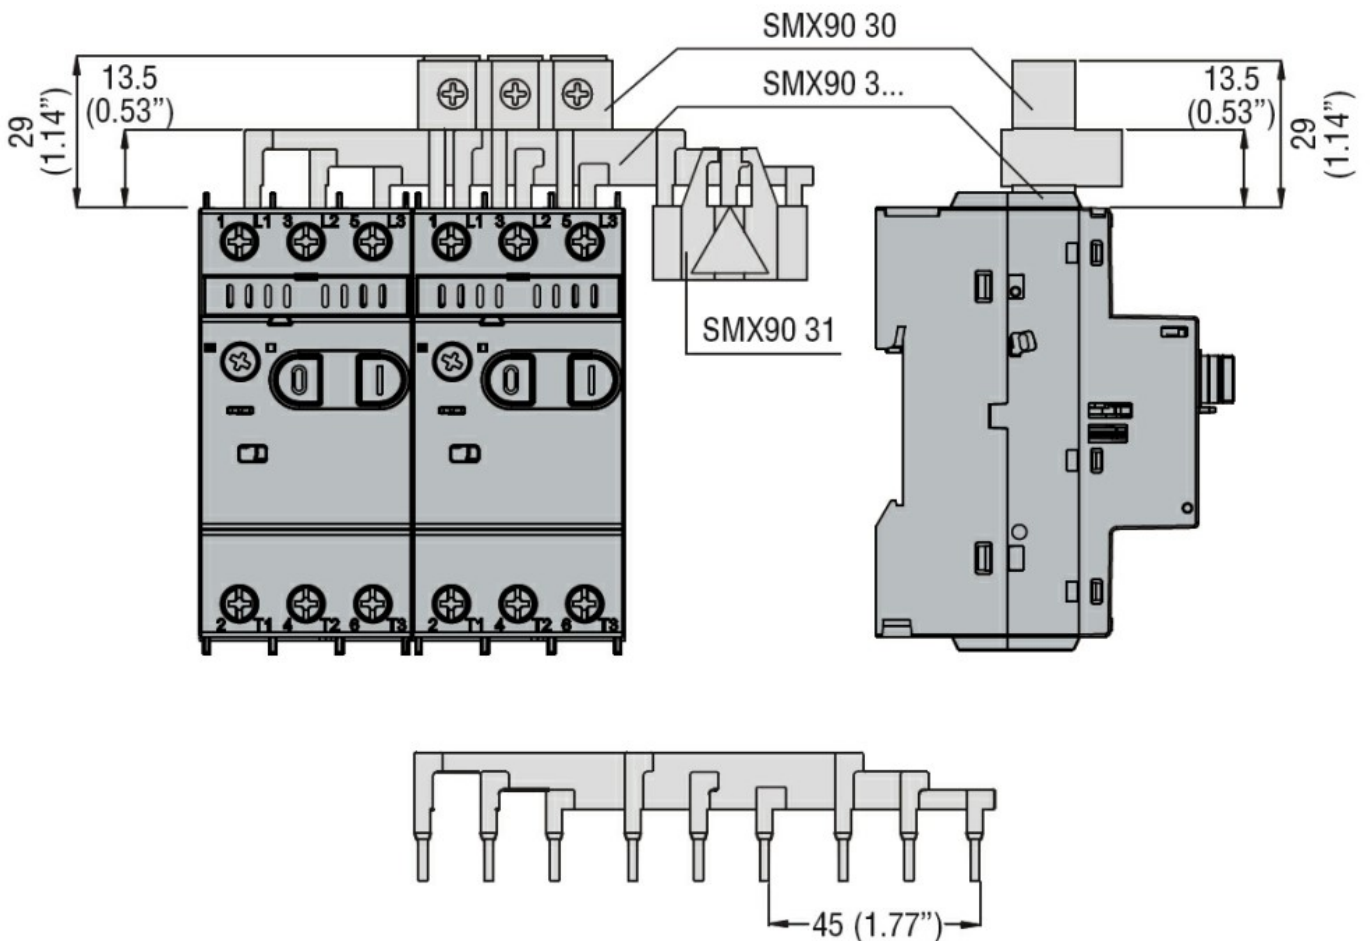

Certifications and compliance

Compliance

- CSA C22.2 n° 14
- IEC/EN 60947-1
- IEC/EN 60947-5-1
- UL60947-1
- UL60947-4-1

Certificates

- cULus
- EAC

ETIM classification