




<b>Relay outputs</b>			
Contact ratings	10A - 400VAC		
<b>Connections</b>			
Terminals type	Screw		
Tightening torque for terminals	max	Nm	0.8
	max	lbin	7.1
<b>Conductor cross section</b>			
AWG/Kcmil	Max	AWG	2 x 14
IEC	Max	mm <sup>2</sup>	2 x 2.5

<b>Housing</b>			
Mounting	on 35mm DIN rail or Plug-in housing		
Dimensions (W x H x D)	mm	38 x 65 x 27	
Weight	g	61	

**Dimensions**

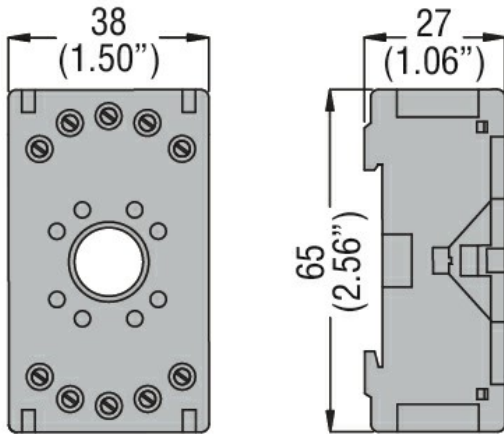

**Certifications and compliance**

Compliance	/
Certificates	EAC

**ETIM classification**

ETIM 8.0	EC001456 - Relay socket
----------	-------------------------