

**General characteristics**

|                   |  |
|-------------------|--|
| Switching diagram | 69 - Changeover switch without 0 4 poles |
| N° of elements    | 4  |
| Mounting form     | U - Front mounting with black handle     |

**Contact characteristics**

|   |                    |          |           |      |
|---|--------------------|----------|-----------|------|
| Rated insulation voltage $U_i$                            | IEC/EN             | V        | 690       |      |
|   | UL/CSA             | V        | 600       |      |
| Rated impulse withstand voltage $U_{imp}$                 |                    | kV       | 6         |      |
| Conventional free air thermal current $I_{th}$            | IEC/EN             | A        | 32        |      |
|   | UL/CSA             | A        | 40        |      |
| Rated operational voltage                                 |                    | V        | 480       |      |
| Rated operational impulse voltage                         |                    | kV       | 4         |      |
| Maximum fuse size for short-circuit protection $I_n$ (gG) | 10kA               | A        | 32        |      |
|   | 15kA               | A        | 32        |      |
|   | 25kA               | A        | 32        |      |
|   | 50kA               | A        | 32        |      |
| Rated short time current $I_{cw}$                         | 1s                 | kA       | 800       |      |
|   |                    |          | 10/5 mA/V |      |
| Conductivity  |                    |          | 10/5 mA/V |      |
| Operational current $I_e$ IEC/EN                          | AC1/AC21A          | A        | 32        |      |
|   | AC15               |          |           |      |
|   | 110V               | A        | 25        |      |
|   | 220/230V           | A        | 20        |      |
|   | 380/400V           | A        | 10        |      |
|   | 660/690V           | A        | 2         |      |
| Rated operational power in AC                             | Three-phase AC-3   | 220/230V | kW        | 7.5  |
|   |                    | 380/440V | kW        | 11   |
|   |                    | 500/690V | kW        | 11   |
|   | Single-phase AC-3  | 110V     | kW        | 2.2  |
|   |                    | 220/230V | kW        | 4    |
|   |                    | 380/440V | kW        | 6.5  |
|   | Three-phase AC23A  | 220/230V | kW        | 8    |
|   |                    | 380/440V | kW        | 15   |
|   |                    | 500/690V | kW        | 18.5 |
|   | Single-phase AC23A | 110V     | kW        | 2.2  |
|   |                    | 220/230V | kW        | 4    |
|   |                    | 380/440V | kW        | 7.5  |
| Rated operational current in DC                           |                    |          |           |      |
| DC21A   |                    |          |           |      |

|  |      |                 |                   |
|--|------|-----------------|-------------------|
|  | 48V  | A               | 32                |
|  | 60V  | A               | 32                |
|  | 110V | A               | 6                 |
|  | 220V | A               | 0.9               |
| <hr/>                                  |      |                 |                   |
| DC23A (poles in series)                | 24V  | A               | 32 (1)            |
|  | 48V  | A               | 32 (2)            |
|  | 60V  | A               | 32 (3)            |
|  | 110V | A               | 15 (3)            |
|  | 220V | A               | 12 (4)            |
| <hr/>                                  |      |                 |                   |
| DC13                                   | 24V  | A               | 32                |
|  | 48V  | A               | 25                |
|  | 60V  | A               | 16                |
|  | 110V | A               | 3                 |
|  | 220V | A               | 0.5               |
| <hr/>                                  |      |                 |                   |
| Power dissipation                      |      | W               | 1.5               |
| <b>Mechanical features</b>             |      |                 |                   |
| Terminals screw                        |      |                 | M4                |
| Tightening torque for terminals max    |      | Nm              | 1.2               |
| <hr/>                                  |      |                 |                   |
| Conductor size                         |      |                 |                   |
| AWG - Rigid cable                      | min  | AWG             | 16                |
|  | Max  | AWG             | 8                 |
| <hr/>                                  |      |                 |                   |
| AWG - Flexible cable                   | min  | AWG             | 16                |
|  | Max  | AWG             | 10                |
| <hr/>                                  |      |                 |                   |
| Conductor size (IEC) - Flexible cable  | min  | mm <sup>2</sup> | 1.5               |
|  | Max  | mm <sup>2</sup> | 4                 |
| <hr/>                                  |      |                 |                   |
| Conductor size (IEC) - Rigid cable     | min  | mm <sup>2</sup> | 1.5               |
|  | Max  | mm <sup>2</sup> | 6                 |
| <hr/>                                  |      |                 |                   |
| Mechanical life                        |      | cycles          | 5x10 <sup>6</sup> |
| <b>UL technical data</b>               |      |                 |                   |
| Motor power for direct-on-line control |      |                 |                   |
| for three-phase motor                  | 120V | HP              | 5                 |
|  | 240V | HP              | 10                |
|  | 480V | HP              | 15                |
|  | 600V | HP              | 15                |
| <hr/>                                  |      |                 |                   |
| for single-phase motor                 | 120V | HP              | 2                 |
|  | 240V | HP              | 5                 |
| <hr/>                                  |      |                 |                   |
| <b>Ambient conditions</b>              |      |                 |                   |
| Temperature                            |      |                 |                   |
| Operating temperature                  | min  | °C              | -25               |
|  | max  | °C              | +55               |
| <hr/>                                  |      |                 |                   |
| Storage temperature                    | min  | °C              | -40               |
|  | max  | °C              | +70               |
| <hr/>                                  |      |                 |                   |
| <b>Resistance &amp; Protection</b>     |      |                 |                   |
| Frontal IP degree                      |      |                 | IP40              |

Terminals IP degree

IP00


**Dimensions**



Standard drillings for 7GN125.  
Drillings on request for 4 screws fixing  
(4V version).

| Series | Dimensions |      |    |     |     |      |      |    |    | L Number of elements |      |       |       |       |       |       |       |       |       |       |       |
|--------|------------|------|----|-----|-----|------|------|----|----|----------------------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|        | □A         | C    | ØD | ØD1 | ØD2 | E    | ØG   | □K | □N | 1                    | 2    | 3     | 4     | 5     | 6     | 7     | 8     | 9     | 10    | 11    | 12    |
| 7GN12  | 48         | 39.5 | 39 | 12  | 5   | 26.5 | 38   | 36 | 6  | 36.1                 | 45.8 | 55.5  | 65.2  | 74.9  | 84.6  | 94.3  | 104   | 113.7 | 123.4 | 133.1 | 142.8 |
| 7GN20  | 48         | 39.5 | 39 | 12  | 5   | 26.5 | 38   | 36 | 6  | 36.1                 | 45.8 | 55.5  | 65.2  | 74.9  | 84.6  | 94.3  | 104   | 113.7 | 123.4 | 133.1 | 142.8 |
| 7GN25  | 48         | 39.5 | 43 | 12  | 5   | 26.5 | 38   | 36 | 6  | 40.5                 | 54.1 | 67.7  | 81.3  | 94.9  | 108.5 | 122.1 | 135.7 | 147.3 | 162.9 | 176.5 | 190.1 |
| 7GN32  | 65         | 53   | 58 | 14  | 5   | 34.5 | 58.5 | 48 | 7  | 46.5                 | 61.6 | 76.7  | 91.8  | 106.9 | 122   | 137.1 | 152.2 | 167.3 | 182.4 | 197.5 | 212.6 |
| 7GN40  | 65         | 53   | 58 | 14  | 5   | 34.5 | 58.5 | 48 | 7  | 46.5                 | 61.6 | 76.7  | 91.8  | 106.9 | 122   | 137.1 | 152.2 | 167.3 | 182.4 | 197.5 | 212.6 |
| 7GN63  | 65         | 53   | 62 | 14  | 5   | 34.5 | 58.5 | 48 | 7  | 50.3                 | 68.4 | 86.5  | 104.6 | 122.7 | 140.8 | 158.9 | 177   | 195.1 | 213.2 | 231.3 | 249.4 |
| 7GN125 | 90         | 70.5 | 86 | 16  | 6   | 41.5 | 84   | 68 | 9  | 67.3                 | 96.4 | 125.5 | 154.6 | 183.7 | 220.3 | 249.4 | 278.5 | 307.6 | 336.7 | 365.8 | 394.9 |

**Wiring diagrams**

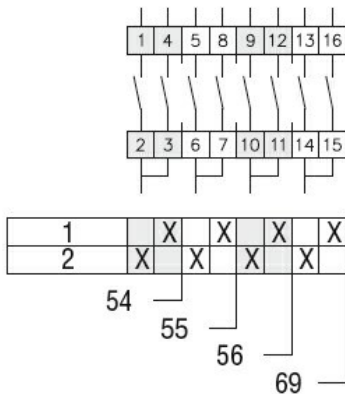

**Certifications and compliance**

Compliance

- CSA C22.2 n° 14
- IEC/EN/BS 60947-1
- IEC/EN/BS 60947-3
- IEC/EN/BS 60947-5-1
- UL60947-4-1

Certificates

- cCSAus
- EAC
- UL

**ETIM classification**

ETIM 8.0

EC001029 -  
Selector switch,  
complete