

**General characteristics**

Switching diagram	69 - Changeover switch without 0 4 poles
N° of elements	4
Mounting form	P - Plastic enclosure with black handle

**Contact characteristics**

Rated insulation voltage $U_i$	IEC/EN	V	690	
	UL/CSA	V	600	
Rated impulse withstand voltage $U_{imp}$		kV	6	
Conventional free air thermal current $I_{th}$	IEC/EN	A	63	
	UL/CSA	A	60	
Rated operational voltage		V	480	
Rated operational impulse voltage		kV	4	
Maximum fuse size for short-circuit protection $I_n$ (gG)	10kA	A	63	
	15kA	A	63	
	25kA	A	63	
	50kA	A	63	
	63kA	A	63	
Rated short time current $I_{cw}$	1s	kA	1600	
			10/5 mA/V	
Conductivity			10/5 mA/V	
Operational current $I_e$ IEC/EN	AC1/AC21A	A	63	
	AC15			
	110V	A	32	
	220/230V	A	25	
	380/400V	A	15	
	660/690V	A	4	
Rated operational power in AC	Three-phase AC-3	220/230V	kW	11
		380/440V	kW	18.5
		500/690V	kW	18.5
	Single-phase AC-3	110V	kW	3.7
		220/230V	kW	6.5
		380/440V	kW	11.5
	Three-phase AC23A	220/230V	kW	12.5
		380/440V	kW	30
		500/690V	kW	30
	Single-phase AC23A	110V	kW	3.7
		220/230V	kW	7.5
		380/440V	kW	12.5
Rated operational current in DC				

ENCLOSED ROTARY CAM SWITCH 7GN SERIES, CHANGEOVER SWITCH WITHOUT 0, 4  
POLES 63A IN PLASTIC ENCLOSURE 125X175MM WITH BLACK HANDLE

DC21A				
	48V	A	63	
	60V	A	50	
	110V	A	8	
	220V	A	1	
DC23A (poles in series)				
	24V	A	50 (1)	
	48V	A	50 (2)	
	60V	A	50 (3)	
	110V	A	25 (3)	
	220V	A	15 (4)	
DC13				
	24V	A	63	
	48V	A	40	
	60V	A	28	
	110V	A	3.3	
Power dissipation		W	3.4	
<b>Mechanical features</b>				
Terminals screw			M5	
Tightening torque for terminals max		Nm	2	
Conductor size				
AWG - Rigid cable				
	min	AWG	14	
	Max	AWG	6	
AWG - Flexible cable				
	min	AWG	14	
	Max	AWG	8	
Conductor size (IEC) - Flexible cable				
	min	mm <sup>2</sup>	2.5	
	Max	mm <sup>2</sup>	10	
Conductor size (IEC) - Rigid cable				
	min	mm <sup>2</sup>	2.5	
	Max	mm <sup>2</sup>	16	
Mechanical life		cycles	5x10 <sup>6</sup>	
<b>UL technical data</b>				
Motor power for direct-on-line control				
for three-phase motor				
	120V	HP	7.5	
	240V	HP	15	
	480V	HP	25	
	600V	HP	25	
for single-phase motor				
	120V	HP	3	
	240V	HP	10	
<b>Ambient conditions</b>				
Temperature				
Operating temperature				
	min	°C	-25	
	max	°C	+55	
Storage temperature				
	min	°C	-40	
	max	°C	+70	
<b>Resistance &amp; Protection</b>				
Frontal IP degree			IP65	

Terminals IP degree

IP00


**Dimensions**

Series	Enclosure size	Number of elements		Dimensions										Cable entry	Protection degree
		L	L1	A	A1	C	C1	D	F	M	N	L	L1		
7GN12 <sup>Ⓟ</sup>	75x75 <sup>Ⓟ</sup>	1-2	3-4	75	75	50	64	4.5	19	14	28	57.5	79.8	4xPG13.5	IP65
7GN20 <sup>Ⓟ</sup>		1-2	3-4												
7GN25 <sup>Ⓟ</sup>		1	2-3												
7GN12 <sup>Ⓟ</sup>	90x90	1-3	4-6	90	90	79	63	4.5	25	19	30	71.3	98.3	4xPG16	IP65
7GN20 <sup>Ⓟ</sup>		1-3	4-6												
7GN25 <sup>Ⓟ</sup>		1-2	3-4												
7GN32		1	2-3												
7GN40		1	2-3												
7GN12	110x110	1-4	5-8	110	110	98.4	83	4.5	32	21	39.5	85.5	119.5	4xPG21	IP65
7GN20		1-4	5-8												
7GN25		1-3	4-5												
7GN32 <sup>Ⓟ</sup>		1-2	3-5												
7GN40 <sup>Ⓟ</sup>		1-2	3-5												
7GN63		1-2	3-4												
7GN32 <sup>Ⓟ</sup>	125x175	1-2	3-4	125	175	146	112	5.5	32	21	68	84.3	118.3	4xPG21 2xPG11	IP65
7GN40 <sup>Ⓟ</sup>		1-2	3-4												
7GN63 <sup>Ⓟ</sup>		1-2	3-4												
7GN125		1	2												
7GN32	198x248	-	1-7	198	248	190-210	140-180	5.5	32	35	104	-	166.5	6xPG16- 21-29	IP65
7GN40		-	1-7												
7GN63 <sup>Ⓟ</sup>		-	1-6												
7GN125 <sup>Ⓟ</sup>		-	1-4												

Ⓟ Standard dimensions for cam switch in plastic enclosure with black handle (P).

Ⓟ D Standard dimensions for cam switch in plastic enclosure with red/yellow handle padlockable in 0 (P25).

**Wiring diagrams**

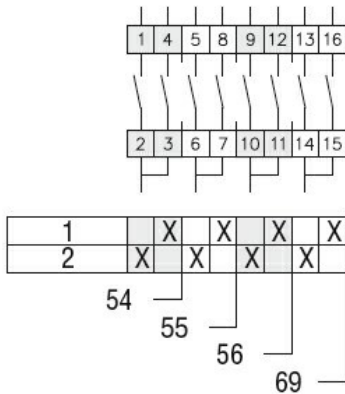

**Certifications and compliance**

Compliance

IEC/EN/BS 60947-1

IEC/EN/BS 60947-3

IEC/EN/BS 60947-5-1

Certificates

EAC

**ETIM classification**

ETIM 8.0

EC001029 -  
Selector switch,  
complete