





Product designation				Signal tower Ø45mm/1.7"
Product type designation	on			8TL4
General characteristics	3			
Diameter		n	nm - incl	h 45 / 1.77
Supply voltage (DC)			V	24±10%
Colour				Green, red
IEC degree of protection	on			IP54
Light consumption per module (DC)			mΑ	37
Mechanical features				
Tightening torque for terminals max			Nm	0.5
Terminals screw				Screw clamp terminals
Conductor section				
	AWG/Kcmil			
		max		16
	IEC			_
		max	mm²	1.5
Weight			g	160
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-20
		max	°C	+50
Dimensions				



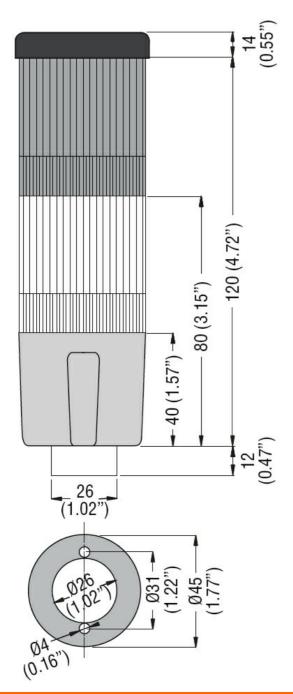

Wiring diagrams



Certifications and compliance

Compliance



ENERGY AND AUTOMATION

8LT4K02BG

STEADY LIGHT MODULE. Ø45MM. BUILT-IN LED CIRCUIT. GREEN, RED, 24VDC

	CSA C22.2 n° 14
	IEC/EN 60947-1
	IEC/EN 60947-5-1
	UL508
Certificates	
	cULus
	EAC
ETIM classification	

ETIM 8.0

EC001042 -Signal tower complete