





# STEADY LIGHT MODULE. Ø45MM. BUILT-IN LED CIRCUIT. GREEN, BLUE, ORANGE, RED,

Product designation					Signal tower Ø45mm/1.7"
Product type designation					8TL4
General characteristics					
Diameter			r		n 45 / 1.77
Supply voltage (DC)				V	24±10%
Colour					Green, blue, orange, red
IEC degree of protection					IP54
Light consumption per modul	e (DC)			mΑ	37
Mechanical features					
Tightening torque for terminal	s max			Nm	0.5
Terminals screw					Screw clamp terminals
Conductor section					
AWG	S/Kcmil				
			max		16
IEC				2	
Maight			max	mm²	1.5
Weight				g	320
Ambient conditions Temperature					
-	ating temperature				
Орсі	amig tomporatoro		min	°C	-20
			max	°C	+50
Dimensions					

**ENERGY AND AUTOMATION** 

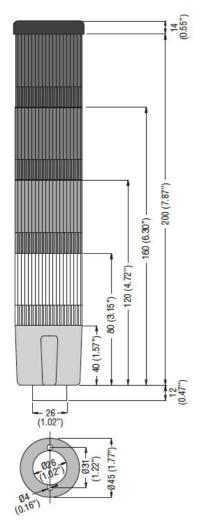

## Wiring diagrams

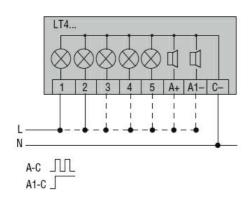

#### Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-5-1

UL508

Certificates

cULus

EAC

#### ETIM classification



### **8LT4K06BG**

STEADY LIGHT MODULE. Ø45MM. BUILT-IN LED CIRCUIT. GREEN, BLUE, ORANGE, RED, 24VDC

ETIM 8.0

EC001042 -Signal tower complete