





General characteristics			
Diameter	mm - inch	70 / 2.75	
Supply voltage (AC)	V	24	
Supply voltage (DC)	V	24	
Colour		Black	
IEC degree of protection		IP54	
Sound module consumption (AC)	mA	25	
Sound module consumption (DC)	mA	25	
Sound intensity	dB	90	
Mechanical features			
Weight	g	240	
Ambient conditions			
Temperature			
Operating temperature			
	min	°C	-20
	max	°C	+50
Dimensions			

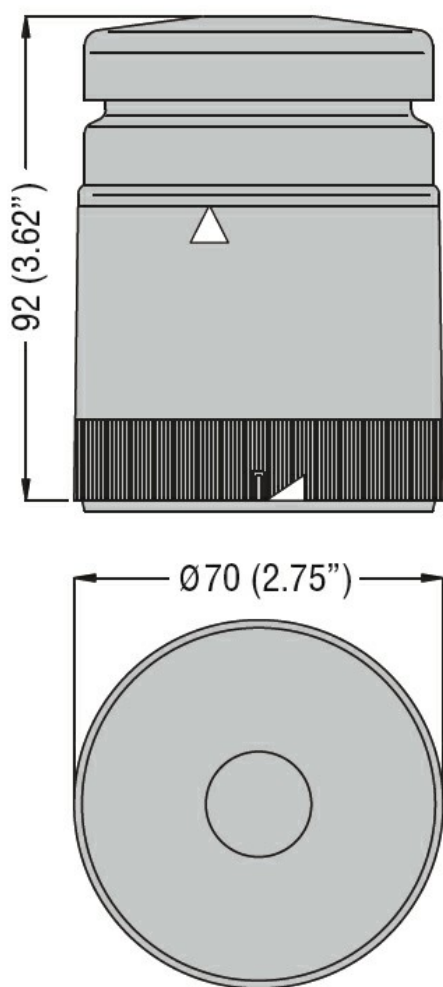

Wiring diagrams

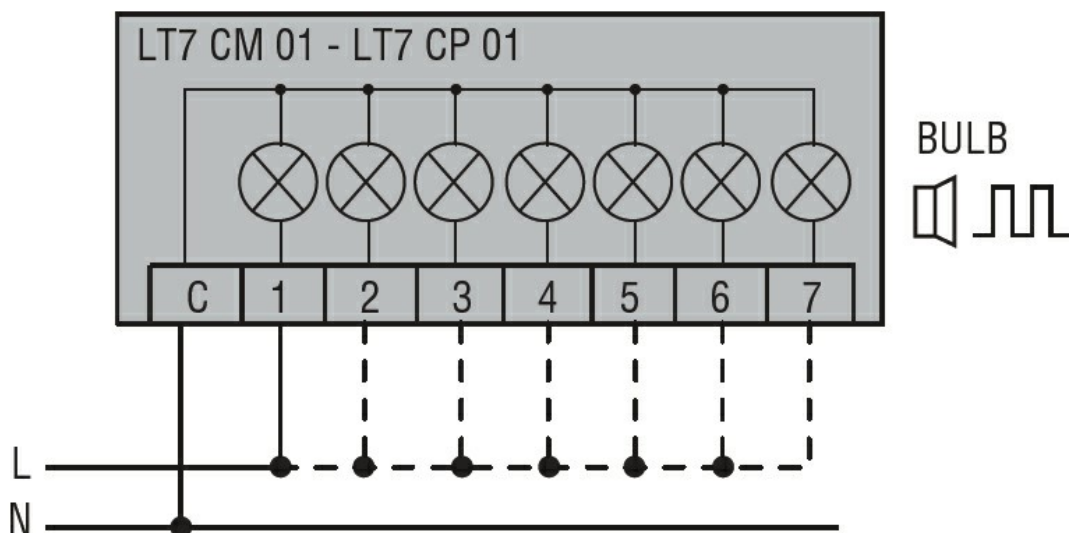

Connect terminals C and 1 as indicated to power the first module.
If other modules are fitted, the respective terminals must be
connected accordingly.

Certifications and compliance

Compliance

CSA C22.2 n°14

IEC/EN 60947-1

IEC/EN 60947-5-1

UL508

Certificates

cULus

EAC

ETIM classification

ETIM 8.0

EC001261 -
Acoustic module
for signal tower