

PULSED OR CONTINUOUS SOUND MODULE COMPLETE WITH COVER. Ø70MM, 110...120VAC, PULSED (78DB) OR CONTINUOUS (75DB) SOUND. IP65 PROTECTION. GREY



Product designation

Signal tower Ø70mm/2.75" 8LT7S - Sound modules

## Product type designation


General characteristics	
Diameter	mm - inch 70 / 2.75
Supply voltage (AC)	V 110120
Colour	Grey
IEC degree of protection	IP65
Sound module consumption (AC)	mA 40
Sound intensity	dB 75
Mechanical features	
Weight	g 240
Ambient conditions	
T	


Temperature

Operating temperature

min	°C	-20
max	°C	+50

## Dimensions








PULSED OR CONTINUOUS SOUND MODULE COMPLETE WITH COVER. Ø70MM, 110...120VAC, PULSED (78DB) OR CONTINUOUS (75DB) SOUND. IP65 PROTECTION. GREY

## Wiring diagrams

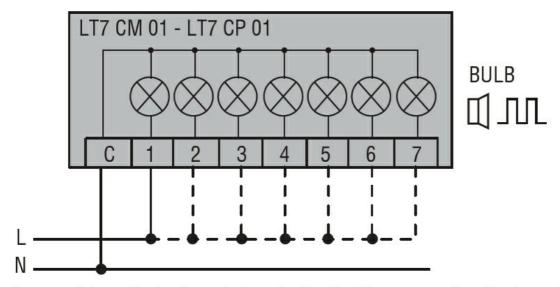

Connect terminals C and 1 as indicated to power the first module. If other modules are fitted, the respective terminals must be connected accordingly.

Certifications and	l compliance		
Compliance			
	CSA C22.2 n°14		
	IEC/EN 60947-1		
	IEC/EN 60947-5-1		
	UL508		
Certificates			
	cULus		
	FAC		

## ETIM classification

**ETIM 8.0** 

EC001261 -Acoustic module for signal tower