



Electrical features

Number of poles		1
Rated insulation voltage Ui	V	1000
IEC Conventional free air thermal current Ith ≤ 40°C	A	520
Conventional free air thermal current Ith UL/CSA	A	520
Rated peak withstand current Ipk	kA	51
Rated short time current Icw 1s	kA	24.5
Short circuit rating (UL)	kA	10

Connections

Terminal hole diameter_Option 1	mm	Slot 25x9.5mm
Conductor section connectable_Option 1	mm2	flexible busbar 25x9.5mm
Tightening torque Max_Option 1	Nm	10
	Ibin	89
Terminal hole diameter_Option 2	mm	2x9.5mm
Conductor section connectable_Option 2	mm2	6...35
	AWG	14..1
Tightening torque Max_Option 2	Nm	4.4
	Ibin	39
Terminal hole diameter_Option 3	mm	5x7.5mm
Conductor section connectable_Option 3	mm2	2.5...16
	AWG	14...4
Tightening torque Max_Option 3	Nm	2.7
	Ibin	24
Terminal hole diameter_Option 4	mm	4x6mm
Conductor section connectable_Option 4	mm2	2.5...10
	AWG	14...6
Tightening torque Max_Option 4	Nm	2.7
	Ibin	24

Mechanical features


Operating position	normal allowable	Vertical plane Any
Fixing		Screw / DIN rail 35mm
Metric Allen Key	mm	3-4-5
Weight	g	393

Resistance & Protection

Terminals IP degree

IP20 front

Dimensions

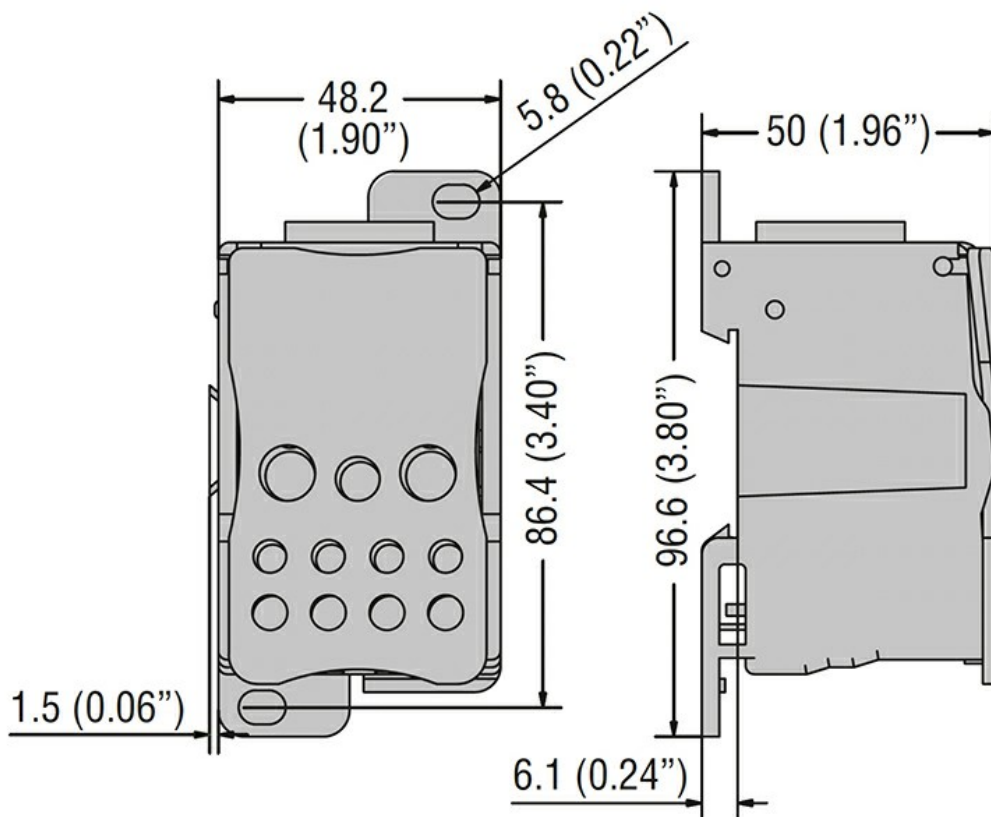

Certifications and compliance

Certifications

IEC/EN/BS 60947-7-1

Compliance

cURus

ETIM classification

EC000066 - Power contactor, AC switching