





Voltage inputs			
Maximum rated voltage Ue			400
Frequency range	Hz		45...65
Current inputs			
Rated current (Ie)	A		45 (AC1)
Digital inputs			
Number of digital input	Nr.		6
Relay outputs			
Number of relay output	Nr.		7
Contact arrangement			6 with 1NO - SPST 1 with NO/NC - SPDT
Insulations			
Voltage inputs			
	Rated insulation voltage Ui	VAC	400
	Rated impulse withstand voltage Uimp	kV	4
Ambient conditions			
Maximum Pollution degree			2
Overvoltage category			3
Housing			
Material			Metallic
Degree of protection			IP65
Dimensions (W x H x D)	mm		500x400x200
Dimensions			

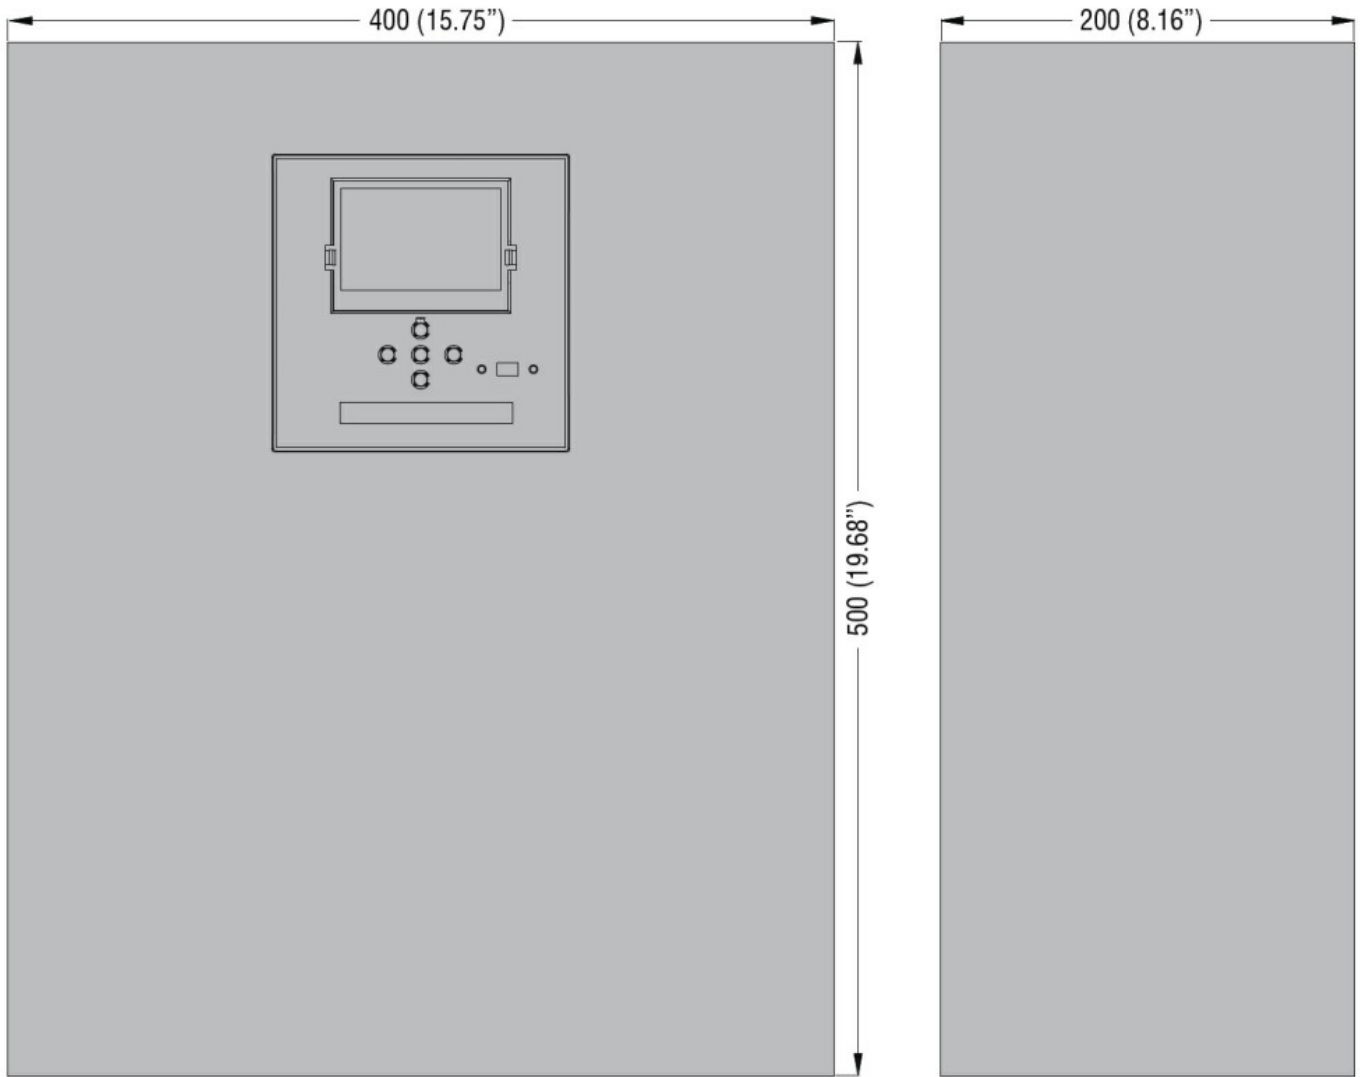

Wiring diagrams

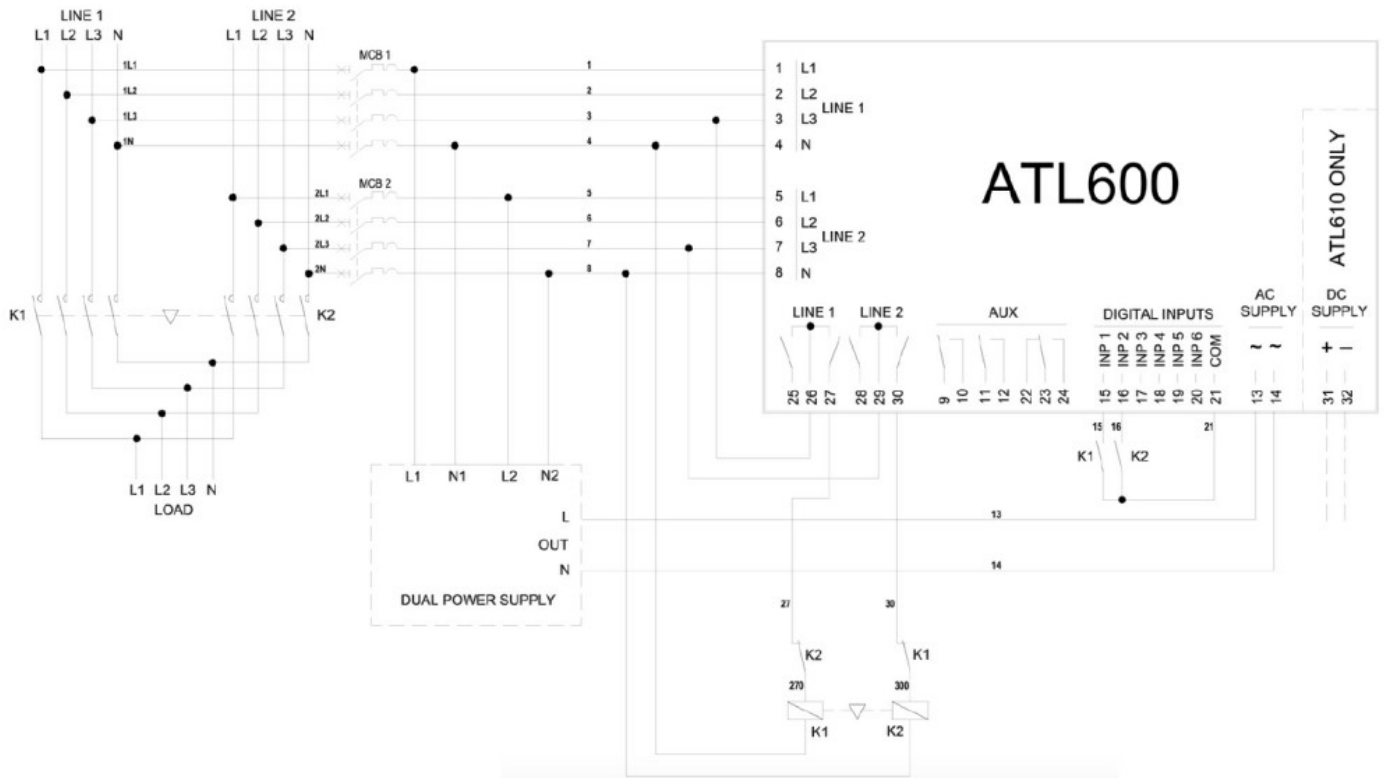

Certifications and compliance
Compliance

IEC 61439-2