



Contact characteristics

| | | |
|--|---|--------|
| Number of poles | Nr. | 3 |
| Rated insulation voltage U_i IEC/EN | V | 690 |
| Rated impulse withstand voltage U_{imp} | kV | 6 |
| Operational frequency | min | Hz 25 |
| | max | Hz 400 |
| IEC Conventional free air thermal current $I_{th} \leq 40^\circ\text{C}$ | A | 25 |
| Operational current I_e | AC-1 ($\leq 40^\circ\text{C}$) | A 25 |
| | AC-1 ($\leq 55^\circ\text{C}$) | A 20 |
| | AC-1 ($\leq 70^\circ\text{C}$) | A 18 |
| | AC-3 ($\leq 440\text{V} \leq 55^\circ\text{C}$) | A 9 |
| | AC-4 (400V) | A 4.9 |
| Rated operational power AC-3 ($T \leq 55^\circ\text{C}$) | 230V | kW 2.2 |
| | 400V | kW 4.2 |
| | 415V | kW 4.5 |
| | 440V | kW 4.8 |
| | 500V | kW 5.5 |
| | 690V | kW 7.5 |
| Rated operational power AC-1 ($T \leq 40^\circ\text{C}$) | 230V | kW 9.5 |
| | 400V | kW 16 |
| | 500V | kW 21 |
| | 690V | kW 27 |
| IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 1 poles in series | $\leq 24\text{V}$ | A 15 |
| | 48V | A 13 |
| | 75V | A 12 |
| | 110V | A 6 |
| | 220V | A - |
| IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 2 poles in series | $\leq 24\text{V}$ | A 18 |
| | 48V | A 18 |
| | 75V | A 17 |
| | 110V | A 12 |
| | 220V | A 1 |
| IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 3 poles in series | $\leq 24\text{V}$ | A 20 |
| | 48V | A 20 |
| | 75V | A 20 |
| | 110V | A 15 |
| | 220V | A 10 |
| IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 4 poles in series | | |

| | | | |
|--|----------|------|------|
| | ≤24V | A | 20 |
| | 48V | A | 20 |
| | 75V | A | 20 |
| | 110V | A | 16 |
| | 220V | A | 12 |
| <hr/> | | | |
| IEC max current Ie in DC3-DC5 with L/R ≤ 15ms with 1 poles in series | ≤24V | A | 10 |
| | 48V | A | 9 |
| | 75V | A | 8 |
| | 110V | A | 2 |
| | 220V | A | – |
| <hr/> | | | |
| IEC max current Ie in DC3-DC5 with L/R ≤ 15ms with 2 poles in series | ≤24V | A | 13 |
| | 48V | A | 11 |
| | 75V | A | 10 |
| | 110V | A | 7 |
| | 220V | A | 2 |
| <hr/> | | | |
| IEC max current Ie in DC3-DC5 with L/R ≤ 15ms with 3 poles in series | ≤24V | A | 15 |
| | 48V | A | 15 |
| | 75V | A | 13 |
| | 110V | A | 11 |
| | 220V | A | 6 |
| <hr/> | | | |
| IEC max current Ie in DC3-DC5 with L/R ≤ 15ms with 4 poles in series | ≤24V | A | 15 |
| | 48V | A | 15 |
| | 75V | A | 15 |
| | 110V | A | 12 |
| | 220V | A | 7 |
| <hr/> | | | |
| Short-time allowable current for 10s (IEC/EN60947-1) | | A | 150 |
| <hr/> | | | |
| Protection fuse | gG (IEC) | A | 25 |
| | aM (IEC) | A | 10 |
| <hr/> | | | |
| Making capacity (RMS value) | | A | 90 |
| <hr/> | | | |
| Breaking capacity at voltage | 440V | A | 72 |
| | 500V | A | 72 |
| | 690V | A | 71 |
| <hr/> | | | |
| Resistance per pole (average value) | | mΩ | 2.5 |
| <hr/> | | | |
| Power dissipation per pole (average value) | Ith | W | 1.6 |
| | AC-3 | W | 0.2 |
| <hr/> | | | |
| Tightening torque for terminals | min | Nm | 1.5 |
| | max | Nm | 1.8 |
| | min | Ibin | 1.1 |
| | max | Ibin | 1.5 |
| <hr/> | | | |
| Tightening torque for coil terminal | min | Nm | 0.8 |
| | max | Nm | 1 |
| | min | Ibin | 0.8 |
| | max | Ibin | 0.74 |
| <hr/> | | | |
| Max number of wires simultaneously connectable | | Nr. | 2 |

Conductor section

| | | | | |
|---|-----|-----------------|-----|----|
| AWG/Kcmil | | | max | 10 |
| Flexible w/o lug conductor section | min | mm ² | 1 | |
| | max | mm ² | 6 | |
| Flexible c/w lug conductor section | min | mm ² | 1 | |
| | max | mm ² | 4 | |
| Flexible with insulated spade lug conductor section | min | mm ² | 1 | |
| | max | mm ² | 4 | |

Power terminal protection according to IEC/EN 60529

IP20 when properly wired

Cable stripping length

| | | |
|-----------------|----|----|
| main circuit | mm | 10 |
| command circuit | mm | 8 |

Mechanical features

Operating position

| | |
|------------------|--------------------|
| normal allowable | Vertical plan ±30° |
|------------------|--------------------|

Fixing

Screw / DIN rail 35mm

Weight

g 360

Auxiliary contact characteristics

Thermal current I_{th}

A 10

IEC/EN 60947-5-1 designation

A600 - P600

Operating current AC15

| | | |
|------|---|-----|
| 230V | A | 3 |
| 400V | A | 1.9 |
| 500V | A | 1.4 |

Operating current DC12

| | | |
|------|---|-----|
| 110V | A | 5.7 |
|------|---|-----|

Operating current DC13

| | | |
|------|---|------|
| 24V | A | 5.7 |
| 48V | A | 2.9 |
| 60V | A | 2.3 |
| 110V | A | 1.25 |
| 125V | A | 1.1 |
| 220V | A | 0.55 |
| 600V | A | 0.2 |

Operations

Mechanical life

cycles 20000000

Electrical life

cycles 2000000

Safety related data

Performance level B10d according to EN/ISO 13489-1

| | | |
|-----------------|--------|----------|
| rated load | cycles | 2000000 |
| mechanical load | cycles | 20000000 |

Mirror contacts according to IEC/EN 60947-4-1 annex F

Yes

EMC compatibility

yes

AC coil operating

Rated AC voltage at 60Hz

V 24

AC operating voltage

of 60Hz coil powered at 60Hz
pick-up

| | | |
|-----|-----|-----|
| min | %Us | 80 |
| max | %Us | 110 |

drop-out

| | | |
|-----|-----|----|
| min | %Us | 20 |
| max | %Us | 55 |

AC average coil consumption at 20°C

of 60Hz coil powered at 60Hz

| | | |
|---------|----|----|
| in-rush | VA | 75 |
| holding | VA | 9 |

Dissipation at holding ≤20°C 50Hz

| | |
|---|-----|
| W | 2.5 |
|---|-----|

Max cycles frequency

Mechanical operation

| | |
|----------|------|
| cycles/h | 3600 |
|----------|------|

Operating times

Average time for Us control

in AC

Closing NO

| | | |
|-----|----|----|
| min | ms | 8 |
| max | ms | 24 |

Opening NO

| | | |
|-----|----|----|
| min | ms | 10 |
| max | ms | 20 |

Closing NC

| | | |
|-----|----|----|
| min | ms | 14 |
| max | ms | 28 |

Opening NC

| | | |
|-----|----|----|
| min | ms | 7 |
| max | ms | 18 |

UL technical data

Rated operational voltage AC (UL)

| | |
|---|-----|
| V | 600 |
|---|-----|

Full-load current (FLA) for three-phase AC motor

| | | |
|---------|---|-----|
| at 480V | A | 7.6 |
| at 600V | A | 9 |

Yielded mechanical performance

for single-phase AC motor

| | | |
|----------|----|------|
| 110/120V | HP | 0.75 |
| 230V | HP | 2 |

for three-phase AC motor

| | | |
|----------|----|-----|
| 200/208V | HP | 3 |
| 220/240V | HP | 3 |
| 460/480V | HP | 5 |
| 575/600V | HP | 7.5 |

General USE

Contactor

| | | |
|------------|---|----|
| AC current | A | 25 |
|------------|---|----|

Auxiliary contacts

| | | |
|------------|---|-----|
| AC voltage | V | 600 |
| AC current | A | 10 |
| DC voltage | V | 250 |
| DC current | A | 1 |

Short-circuit protection fuse, 600V

High fault


| | | |
|-----------------------|----|-----|
| Short circuit current | kA | 100 |
|-----------------------|----|-----|

| | | | |
|--|-----------------------|----|-------------|
| | Fuse rating | A | 30 |
| | Fuse class | | J |
| Standard fault | Short circuit current | kA | 5 |
| | Fuse rating | A | 60 |
| Contact rating of auxiliary contacts according to UL | | | A600 - P600 |
| Ambient conditions | | | |
| Temperature | | | |
| Operating temperature | | | |
| | min | °C | -50 |
| | max | °C | 70 |
| Storage temperature | | | |
| | min | °C | -60 |
| | max | °C | 80 |
| Max altitude | | m | 3000 |


Resistance & Protection

| | |
|------------------|---|
| Pollution degree | 3 |
|------------------|---|

Dimensions

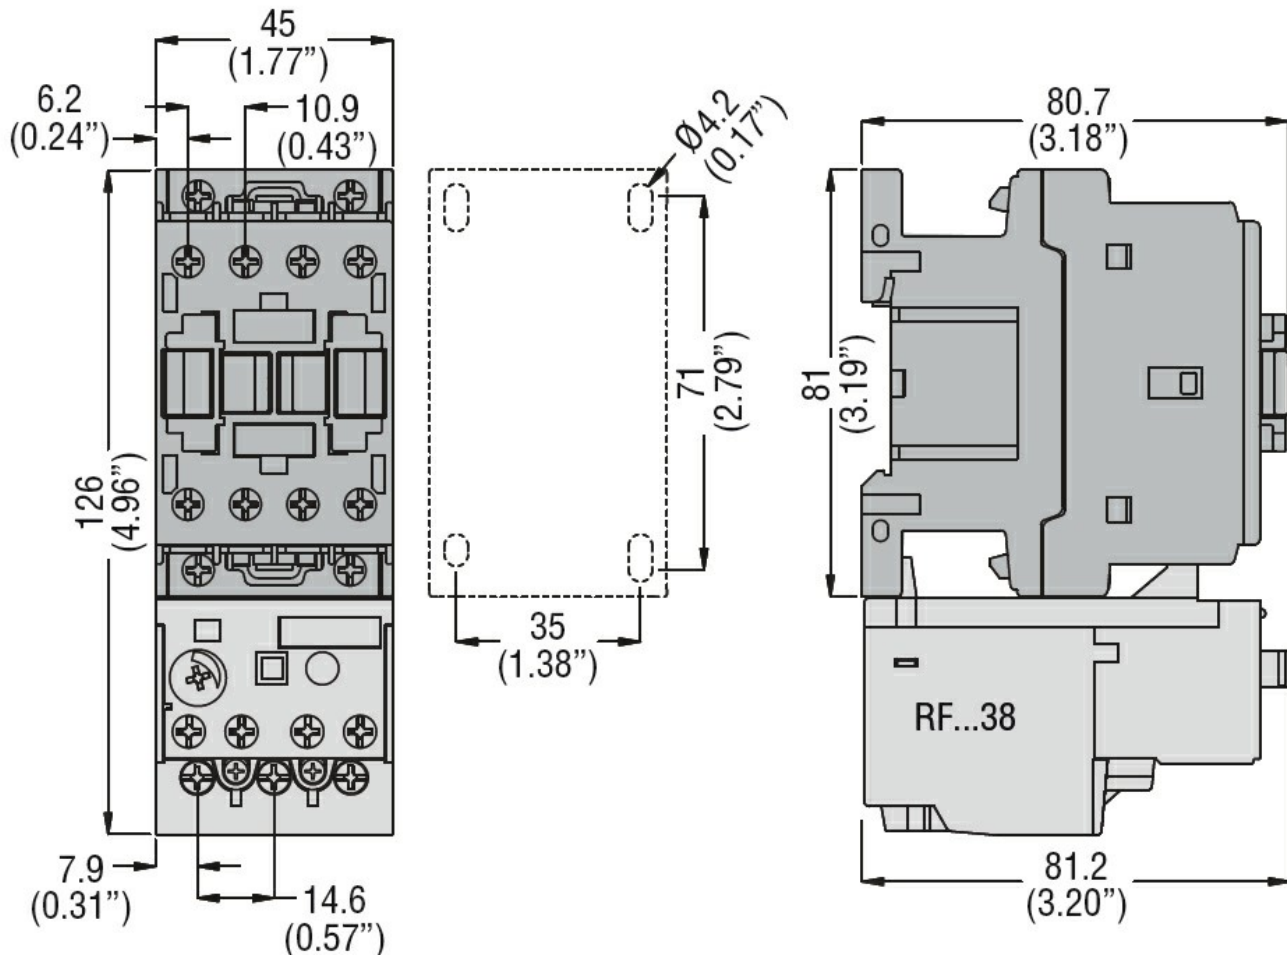

Wiring diagrams

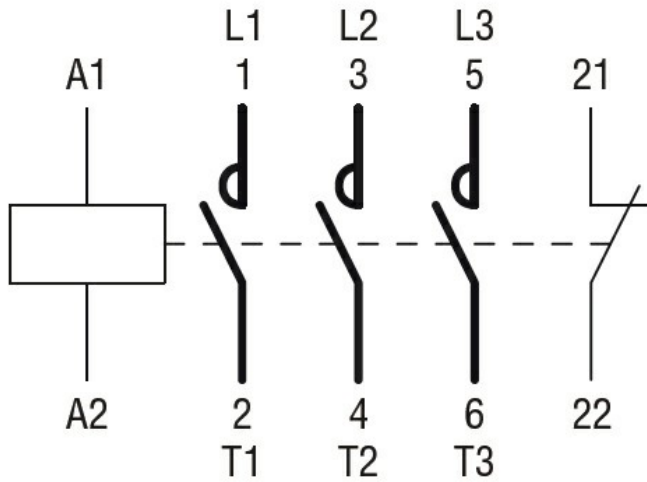

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN 60335-2-89

IEC/EN/BS 60947-1

IEC/EN/BS 60947-4-1

UL 60947-1

UL 60947-4-1

Certificates

CCC

CSA C22.2 n. 60335-2-40:22 LZGH A2L

CSA C22.2 No. 60335-2-89:21 LZGH A2L

cULus

EAC

UL 60335-2-40 LZGH A2L

UL 60335-2-89 LZGH A2L

ETIM classification

ETIM 8.0

EC000066 -
 Power contactor,
 AC switching