



Contact characteristics

Number of poles	Nr.	4
Rated insulation voltage U _i IEC/EN	V	1000
Rated impulse withstand voltage U _{imp}	kV	8
Operational frequency	min	Hz 25
	max	Hz 400
IEC Conventional free air thermal current I _{th} ≤ 40°C	A	165
Operational current I _e	AC-1 (≤40°C)	A 165
	AC-1 (≤55°C)	A 135
	AC-1 (≤70°C)	A 118
	AC-3 (≤440V ≤55°C)	A 150
	AC-4 (400V)	A 70
Rated operational current AC-3 (T≤55°C)	230V	A 150
	400V	A 150
	415V	A 150
	440V	A 150
	500V	A 128
	690V	A 113
	1000V	A 51
Rated operational power AC-1 (T≤40°C)	230V	kW 62
	400V	kW 110
	500V	kW 136
	690V	kW 187
IEC max current I _e in DC1 with L/R ≤ 1ms with 1 poles in series	≤24V	A 165
	48V	A 165
	75V	A 150
	110V	A 10
	220V	A –
IEC max current I _e in DC1 with L/R ≤ 1ms with 2 poles in series	≤24V	A 165
	48V	A 165
	75V	A 165
	110V	A 150
	220V	A 14
IEC max current I _e in DC1 with L/R ≤ 1ms with 3 poles in series	≤24V	A 165
	48V	A 165
	75V	A 165
	110V	A 160
	220V	A 150

IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 4 poles in series

$\leq 24\text{V}$	A	165
48V	A	165
75V	A	165
110V	A	165
220V	A	165

IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 1 poles in series

$\leq 24\text{V}$	A	165
48V	A	60
75V	A	44
110V	A	6
220V	A	–

IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 2 poles in series

$\leq 24\text{V}$	A	165
48V	A	82
75V	A	70
110V	A	80
220V	A	7

IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 3 poles in series

$\leq 24\text{V}$	A	165
48V	A	195
75V	A	110
110V	A	120
220V	A	120

IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 4 poles in series

$\leq 24\text{V}$	A	165
48V	A	130
75V	A	130
110V	A	150
220V	A	150

Short-time allowable current for 10s (IEC/EN60947-1)

A	1200
---	------

Protection fuse

gG (IEC)	A	250
aM (IEC)	A	160

Making capacity (RMS value)

A	1500
---	------

Breaking capacity at voltage

440V	A	1200
500V	A	1025
690V	A	905

Resistance per pole (average value)

mΩ	0.45
----	------

Power dissipation per pole (average value)

I _{th}	W	12
AC-3	W	10.1

Tightening torque for terminals

min	Nm	6
max	Nm	7
min	I _{bin}	35.4
max	I _{bin}	44.3

Tightening torque for coil terminal

min	Nm	0.8
max	Nm	1
min	I _{bin}	0.59
max	I _{bin}	0.74

Max number of wires simultaneously connectable	Nr.	2	
Conductor section			
AWG/Kcmil	max	2/0	
Flexible w/o lug conductor section	min	mm ²	1.5
	max	mm ²	70
Flexible c/w lug conductor section	min	mm ²	1.5
	max	mm ²	70
Power terminal protection according to IEC/EN 60529		IP20 front	
Mechanical features			
Operating position	normal allowable	Vertical plan ±30°	
Fixing		Screw / DIN rail 35mm	
Weight	g	2460	
Operations			
Mechanical life	cycles	15000000	
Electrical life	cycles	800000	
Safety related data			
Performance level B10d according to EN/ISO 13489-1	rated load mechanical load	cycles	800000
		cycles	15000000
EMC compatibility		yes	
AC coil operating			
Rated AC voltage at 50/60Hz, 60Hz	min	V	100
	max	V	250
AC operating voltage			
of 50/60Hz coil powered at 50Hz			
pick-up	min	%Us	80 Us min
	max	%Us	110 Us max
drop-out	max	%Us	≤70 Us min
of 50/60Hz coil powered at 60Hz			
pick-up	min	%Us	80 Us min
	max	%Us	110 Us max
drop-out	max	%Us	≤70 Us min
AC average coil consumption at 20°C			
of 50/60Hz coil powered at 50Hz			
	in-rush	VA	70...175
	holding	VA	1.7...3.5
of 50/60Hz coil powered at 60Hz			
	in-rush	VA	70...175
	holding	VA	1.7...3.5
of 60Hz coil powered at 60Hz			
	in-rush	VA	70...175
	holding	VA	1.7...3.5

Dissipation at holding $\leq 20^{\circ}\text{C}$ 50Hz	W	1.3...1.5
---	---	-----------

DC coil operating

DC rated control voltage	min	V	100
	max	V	250
max		V	250

DC operating voltage

pick-up	min	%Us	80 Us min
	max	%Us	110 Us max
drop-out	max	%Us	≤ 70 Us min

Average coil consumption $\leq 20^{\circ}\text{C}$

in-rush	W	70...80
holding	W	1.3...1.5

Max cycles frequency

Mechanical operation	cycles/h	2000
----------------------	----------	------

Operating times

Average time for Us control

in AC	Closing NO	min	ms	45	
		max	ms	90	
	Opening NO	min	ms	24	
		max	ms	60	
	in DC	Closing NO	min	ms	45
			max	ms	90
Opening NO		min	ms	24	
		max	ms	60	

UL technical data

Rated operational voltage AC (UL)	V	600
-----------------------------------	---	-----

Yielded mechanical performance

for three-phase AC motor	200/208V	HP	50
	220/240V	HP	50
	460/480V	HP	100
	575/600V	HP	125

General USE

Contactor	AC current	A	165
-----------	------------	---	-----

Short-circuit protection fuse, 600V

High fault	Short circuit current	kA	100
	Fuse rating	A	200
	Fuse class	J	

Standard fault	Short circuit current	kA	10
	Fuse rating	A	250
	Fuse class	RK5	

Ambient conditions

Temperature

Operating temperature

min	°C	-40
max	°C	70

Storage temperature

min	°C	-50
max	°C	80

Max altitude


m	3000
---	------

Resistance & Protection


Pollution degree

3

Dimensions

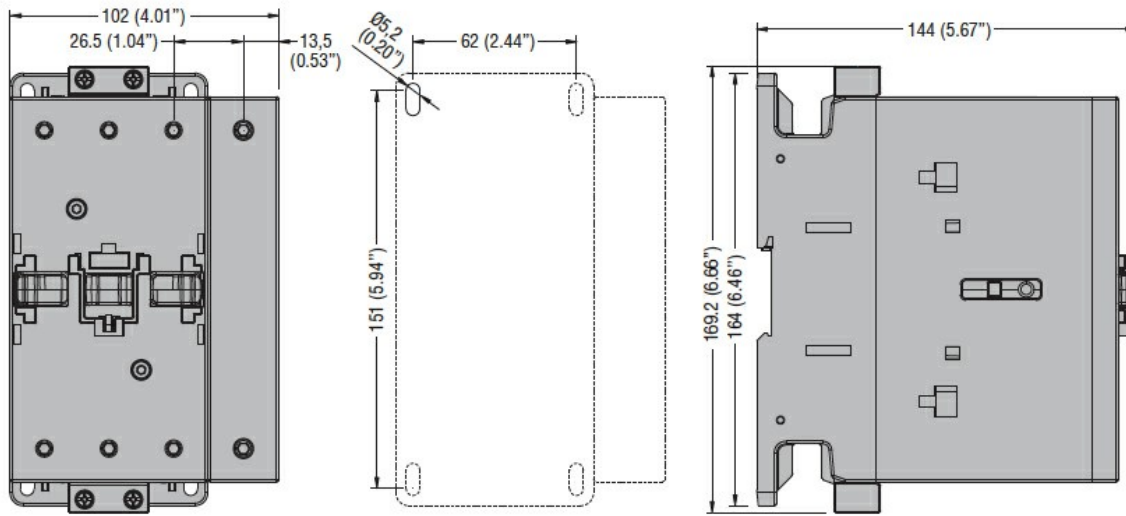

Wiring diagrams

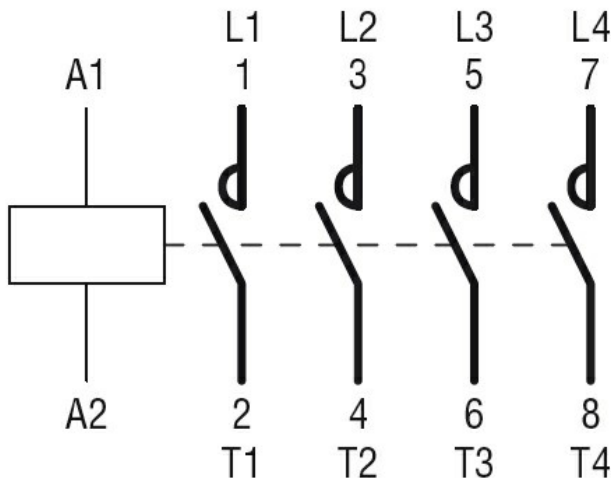

Certifications and compliance

Compliance

- CSA C22.2 n° 60947-1
- CSA C22.2 n° 60947-4-1
- IEC/EN 60335-2-89
- IEC/EN/BS 60947-1
- IEC/EN/BS 60947-4-1
- UL 60947-1
- UL 60947-4-1

Certificates

CCC

CSA C22.2 n. 60335-2-40:22 LZGH A2L

CSA C22.2 No. 60335-2-89:21 LZGH A2L

cULus

EAC

UL 60335-2-40 LZGH A2L

UL 60335-2-89 LZGH A2L

ETIM classification

ETIM 8.0

EC000066 -
Power contactor,
AC switching