



Contact characteristics

| | | |
|---|--------------------|--------|
| Number of poles | Nr. | 3 |
| Rated insulation voltage Ui IEC/EN | V | 690 |
| Rated impulse withstand voltage Uimp | kV | 6 |
| Operational frequency | min | Hz 25 |
| | max | Hz 400 |
| IEC Conventional free air thermal current Ith ≤ 40°C | A | 32 |
| Operational current Ie | AC-1 (≤40°C) | A 32 |
| | AC-1 (≤55°C) | A 26 |
| | AC-1 (≤70°C) | A 23 |
| | AC-3 (≤440V ≤55°C) | A 18 |
| | AC-4 (400V) | A 8.5 |
| Rated operational power AC-3 (T≤55°C) | 230V | kW 4 |
| | 400V | kW 7.5 |
| | 415V | kW 9 |
| | 440V | kW 9 |
| | 500V | kW 10 |
| | 690V | kW 10 |
| Rated operational power AC-1 (T≤40°C) | 230V | kW 12 |
| | 400V | kW 21 |
| | 500V | kW 26 |
| | 690V | kW 36 |
| IEC max current Ie in DC1 with L/R ≤ 1ms with 1 poles in series | ≤24V | A 17 |
| | 48V | A 15 |
| | 75V | A 15 |
| | 110V | A 6 |
| | 220V | A – |
| IEC max current Ie in DC1 with L/R ≤ 1ms with 2 poles in series | ≤24V | A 20 |
| | 48V | A 20 |
| | 75V | A 20 |
| | 110V | A 13 |
| | 220V | A 1 |
| IEC max current Ie in DC1 with L/R ≤ 1ms with 3 poles in series | ≤24V | A 22 |
| | 48V | A 22 |
| | 75V | A 20 |
| | 110V | A 16 |
| | 220V | A 11 |
| IEC max current Ie in DC1 with L/R ≤ 1ms with 4 poles in series | | |

| | | | |
|--|-----------------|------------------|------|
| | ≤24V | A | 22 |
| | 48V | A | 22 |
| | 75V | A | 20 |
| | 110V | A | 18 |
| | 220V | A | 13 |
| <hr/> | | | |
| IEC max current I _e in DC3-DC5 with L/R ≤ 15ms with 1 poles in series | ≤24V | A | 12 |
| | 48V | A | 11 |
| | 75V | A | 11 |
| | 110V | A | 2 |
| | 220V | A | – |
| <hr/> | | | |
| IEC max current I _e in DC3-DC5 with L/R ≤ 15ms with 2 poles in series | ≤24V | A | 15 |
| | 48V | A | 13 |
| | 75V | A | 13 |
| | 110V | A | 8 |
| | 220V | A | 2 |
| <hr/> | | | |
| IEC max current I _e in DC3-DC5 with L/R ≤ 15ms with 3 poles in series | ≤24V | A | 18 |
| | 48V | A | 18 |
| | 75V | A | 16 |
| | 110V | A | 12 |
| | 220V | A | 6 |
| <hr/> | | | |
| IEC max current I _e in DC3-DC5 with L/R ≤ 15ms with 4 poles in series | ≤24V | A | 18 |
| | 48V | A | 18 |
| | 75V | A | 16 |
| | 110V | A | 13 |
| | 220V | A | 8 |
| <hr/> | | | |
| Short-time allowable current for 10s (IEC/EN60947-1) | | A | 200 |
| <hr/> | | | |
| Protection fuse | gG (IEC) | A | 32 |
| | aM (IEC) | A | 20 |
| <hr/> | | | |
| Making capacity (RMS value) | | A | 180 |
| <hr/> | | | |
| Breaking capacity at voltage | 440V | A | 144 |
| | 500V | A | 120 |
| | 690V | A | 94 |
| <hr/> | | | |
| Resistance per pole (average value) | | mΩ | 2.5 |
| <hr/> | | | |
| Power dissipation per pole (average value) | I _{th} | W | 2.6 |
| | AC-3 | W | 0.8 |
| <hr/> | | | |
| Tightening torque for terminals | min | Nm | 1.5 |
| | max | Nm | 1.8 |
| | min | I _{bin} | 1.1 |
| | max | I _{bin} | 1.5 |
| <hr/> | | | |
| Tightening torque for coil terminal | min | Nm | 0.8 |
| | max | Nm | 1 |
| | min | I _{bin} | 0.8 |
| | max | I _{bin} | 0.74 |
| <hr/> | | | |
| Max number of wires simultaneously connectable | | Nr. | 2 |

| | | | |
|---|------------------|--------|--------------------------|
| Conductor section | | | |
| AWG/Kcmil | | max | 10 |
| Flexible w/o lug conductor section | | | |
| | | min | mm ² 1 |
| | | max | mm ² 6 |
| Flexible c/w lug conductor section | | | |
| | | min | mm ² 1 |
| | | max | mm ² 4 |
| Flexible with insulated spade lug conductor section | | | |
| | | min | mm ² 1 |
| | | max | mm ² 4 |
| Power terminal protection according to IEC/EN 60529 | | | IP20 when properly wired |
| Cable stripping length | | | |
| | main circuit | mm | 10 |
| | command circuit | mm | 8 |
| Mechanical features | | | |
| Operating position | | | |
| | normal allowable | | Vertical plan ±30° |
| Fixing | | | Screw / DIN rail 35mm |
| Weight | | | g 352 |
| Auxiliary contact characteristics | | | |
| Thermal current I _{th} | | | A 10 |
| IEC/EN 60947-5-1 designation | | | A600 - P600 |
| Operating current AC15 | | | |
| | 230V | A | 3 |
| | 400V | A | 1.9 |
| | 500V | A | 1.4 |
| Operating current DC12 | | | |
| | 110V | A | 5.7 |
| Operating current DC13 | | | |
| | 24V | A | 5.7 |
| | 48V | A | 2.9 |
| | 60V | A | 2.3 |
| | 110V | A | 1.25 |
| | 125V | A | 1.1 |
| | 220V | A | 0.55 |
| | 600V | A | 0.2 |
| Operations | | | |
| Mechanical life | | | cycles 20000000 |
| Electrical life | | | cycles 1600000 |
| Safety related data | | | |
| Performance level B10d according to EN/ISO 13489-1 | | | |
| | rated load | cycles | 1600000 |
| | mechanical load | cycles | 20000000 |
| EMC compatibility | | | yes |
| AC coil operating | | | |
| Rated AC voltage at 60Hz | | | V 460 |
| AC operating voltage | | | |
| of 60Hz coil powered at 60Hz | | | |

| | | | |
|----------|-----|-----|-----|
| pick-up | min | %Us | 80 |
| | max | %Us | 110 |
| drop-out | min | %Us | 20 |
| | max | %Us | 55 |

AC average coil consumption at 20°C
of 60Hz coil powered at 60Hz

| | | |
|---------|----|----|
| in-rush | VA | 75 |
| holding | VA | 9 |

Dissipation at holding ≤20°C 50Hz

| | |
|---|-----|
| W | 2.5 |
|---|-----|

Max cycles frequency

Mechanical operation cycles/h 3600

Operating times

Average time for Us control
in AC

| | | | |
|------------|-----|----|----|
| Closing NO | min | ms | 8 |
| | max | ms | 24 |
| Opening NO | min | ms | 10 |
| | max | ms | 20 |
| Closing NC | min | ms | 14 |
| | max | ms | 28 |
| Opening NC | min | ms | 7 |
| | max | ms | 18 |

UL technical data

Rated operational voltage AC (UL) V 600

Full-load current (FLA) for three-phase AC motor

| | | |
|---------|---|----|
| at 480V | A | 14 |
| at 600V | A | 17 |

Yielded mechanical performance

for single-phase AC motor

| | | |
|----------|----|---|
| 110/120V | HP | 1 |
| 230V | HP | 3 |

for three-phase AC motor

| | | |
|----------|----|----|
| 200/208V | HP | 5 |
| 220/240V | HP | 5 |
| 460/480V | HP | 10 |
| 575/600V | HP | 15 |

General USE

Contactor

| | | |
|------------|---|----|
| AC current | A | 32 |
|------------|---|----|

Auxiliary contacts

| | | |
|------------|---|-----|
| AC voltage | V | 600 |
| AC current | A | 10 |
| DC voltage | V | 250 |
| DC current | A | 1 |

Short-circuit protection fuse, 600V
High fault


| | | |
|-----------------------|----|-----|
| Short circuit current | kA | 100 |
| Fuse rating | A | 60 |

| | Fuse class | J |
|--|-----------------------|-------------|
| Standard fault | | |
| | Short circuit current | kA 5 |
| | Fuse rating | A 80 |
| Contact rating of auxiliary contacts according to UL | | A600 - P600 |
| Ambient conditions | | |
| Temperature | | |
| Operating temperature | | |
| | min | °C -50 |
| | max | °C 70 |
| Storage temperature | | |
| | min | °C -60 |
| | max | °C 80 |
| Max altitude | | m 3000 |

Resistance & Protection

| | |
|------------------|---|
| Pollution degree | 3 |
|------------------|---|

Dimensions

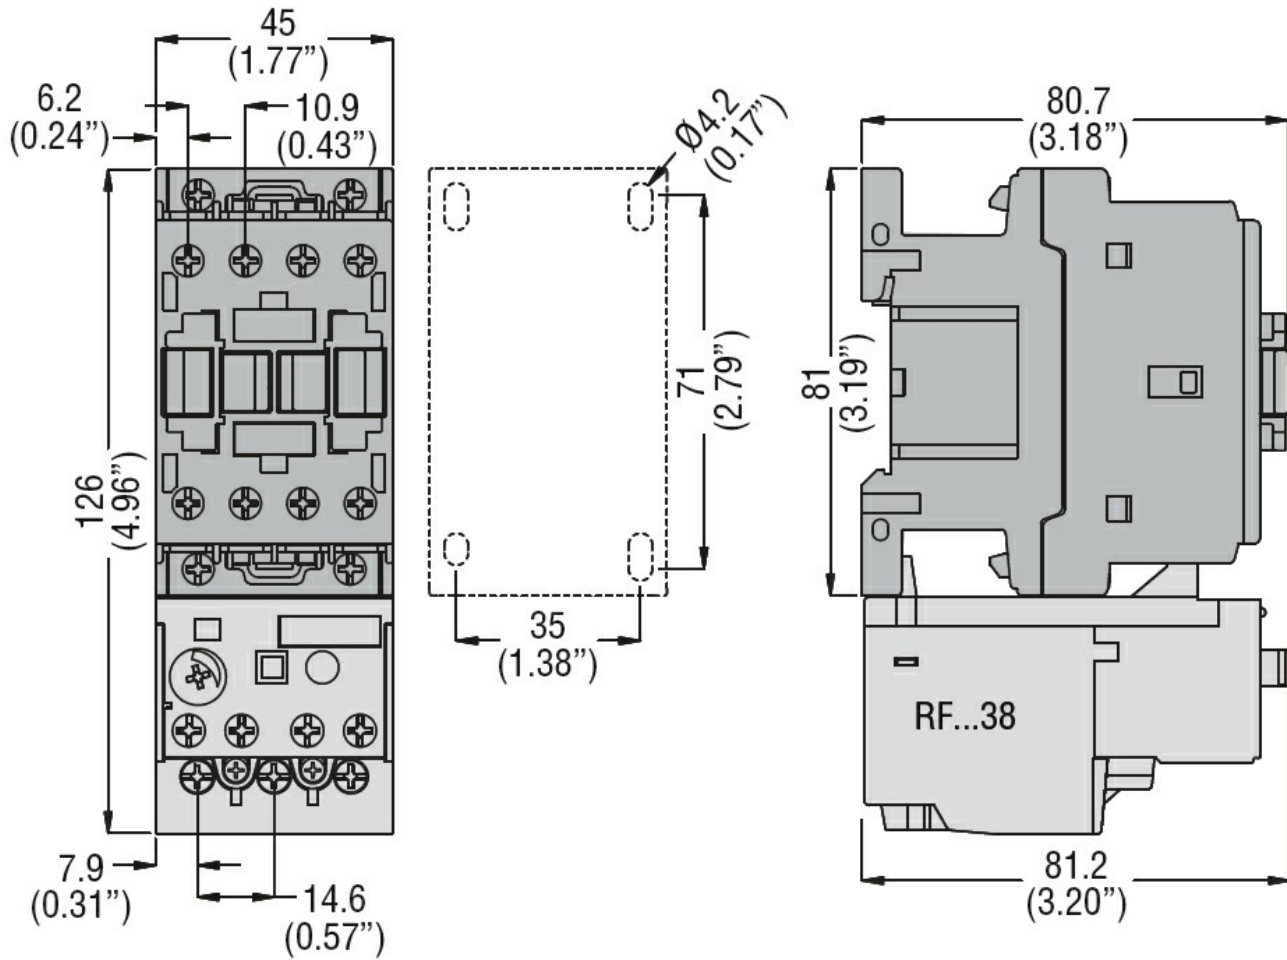

Wiring diagrams



Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN 60335-2-89

IEC/EN/BS 60947-1

IEC/EN/BS 60947-4-1

UL 60947-1

UL 60947-4-1

Certificates

CCC

CSA C22.2 n. 60335-2-40:22 LZGH A2L

CSA C22.2 No. 60335-2-89:21 LZGH A2L

cULus

EAC

UL 60335-2-40 LZGH A2L

UL 60335-2-89 LZGH A2L

ETIM classification

ETIM 8.0

EC000066 -
 Power contactor,
 AC switching