



Contact characteristics

Number of poles	Nr.	4
Rated insulation voltage U _i IEC/EN	V	690
Rated impulse withstand voltage U _{imp}	kV	6
Operational frequency	min	Hz 25
	max	Hz 400
IEC Conventional free air thermal current I _{th} ≤ 40°C	A	56
Operational current I _e		
	AC-1 (≤40°C)	A 56
	AC-1 (≤40°C) with 16mm ² wire and fork end lug	A 60
	AC-1 (≤55°C)	A 45
	AC-1 (≤55°C) with 16mm ² wire and fork end lug	A 48
	AC-1 (≤70°C)	A 40
	AC-1 (≤70°C) with 16mm ² wire and fork end lug	A 42
	AC-3 (≤440V ≤55°C)	A 38
	AC-4 (400V)	A 15.5
Rated operational power AC-1 (T≤40°C)		
	230V	kW 21
	400V	kW 36
	500V	kW 45
	690V	kW 62
Short-time allowable current for 10s (IEC/EN60947-1)	A	320
Protection fuse		
	gG (IEC)	A 63
	aM (IEC)	A 40
Making capacity (RMS value)	A	380
Breaking capacity at voltage		
	440V	A 304
	500V	A 240
	690V	A 192
Resistance per pole (average value)	mΩ	2
Power dissipation per pole (average value)		
	I _{th}	W 6
	AC-3	W 2.9
Tightening torque for terminals		
	min	Nm 2.5
	max	Nm 3
	min	lbin 1.8
	max	lbin 2.2
Tightening torque for coil terminal		
	min	Nm 0.8
	max	Nm 1
	min	lbin 0.8
	max	lbin 0.74

Max number of wires simultaneously connectable			Nr.	2
Conductor section				
AWG/Kcmil				
		max	6	
Flexible w/o lug conductor section		min	mm²	2.5
		max	mm²	16
Flexible c/w lug conductor section		min	mm²	1
		max	mm²	10
Flexible with insulated spade lug conductor section		min	mm²	1
		max	mm²	16
Power terminal protection according to IEC/EN 60529				IP20 when properly wired
Cable stripping lenght				
		main circuit	mm	10
		command circuit	mm	8
Mechanical features				
Operating position		normal allowable		Vertical plan ±30°
Fixing				Screw / DIN rail 35mm
Weight		g		664
Operations				
Mechanical life		cycles		20000000
Electrical life		cycles		1400000
Safety related data				
Performance level B10d according to EN/ISO 13489-1		rated load mechanical load		cycles 1400000 cycles 20000000
EMC compatibility		yes		
DC coil operating				
DC rated control voltage		V		24
DC operating voltage		pick-up		
		min	%Us	80
		max	%Us	110
drop-out		min	%Us	10
		max	%Us	40
Average coil consumption ≤20°C		in-rush	W	2.4
		holding	W	2.4
Max cycles frequency				
Mechanical operation		cycles/h		3600
Operating times				
Average time for Us control in AC		Closing NO		
		min	ms	8
		max	ms	24

in DC	Opening NO	min	ms	5
		max	ms	15
	Closing NC	min	ms	9
		max	ms	20
	Opening NC	min	ms	9
		max	ms	17
	Closing NO	min	ms	76
		max	ms	92
	Opening NO	min	ms	16
		max	ms	20
	Closing NC	min	ms	25
		max	ms	31
	Opening NC	min	ms	63
		max	ms	71

UL technical data

Rated operational voltage AC (UL) V 600

Full-load current (FLA) for three-phase AC motor

at 480V	A	40
at 600V	A	32

Yielded mechanical performance

for single-phase AC motor

110/120V	HP	3
230V	HP	7.5

for three-phase AC motor

200/208V	HP	10
220/240V	HP	15
460/480V	HP	30
575/600V	HP	30

General USE

Contactor

AC current	A	55
------------	---	----

Ambient conditions

Temperature

Operating temperature

min	°C	-50
max	°C	70

Storage temperature


min	°C	-60
max	°C	80

Max altitude m 3000


Resistance & Protection

Pollution degree 3

Dimensions

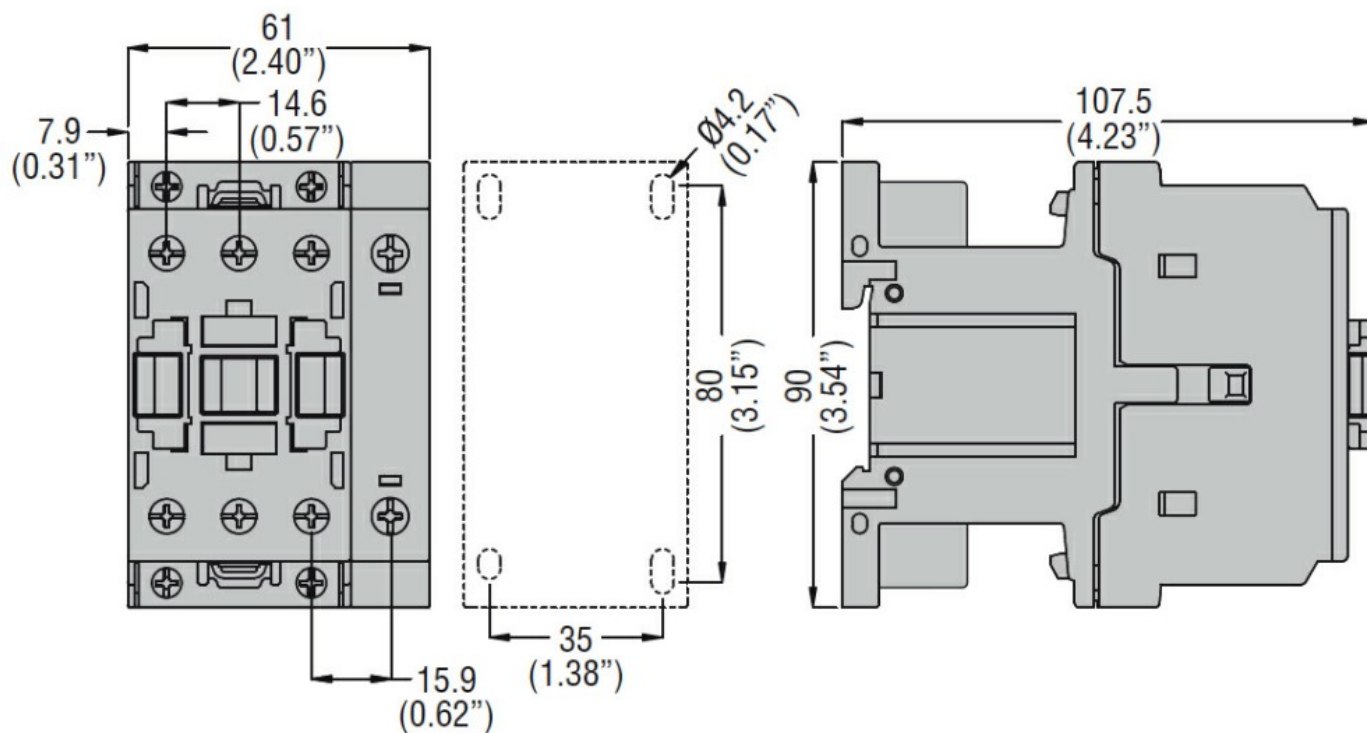

Wiring diagrams

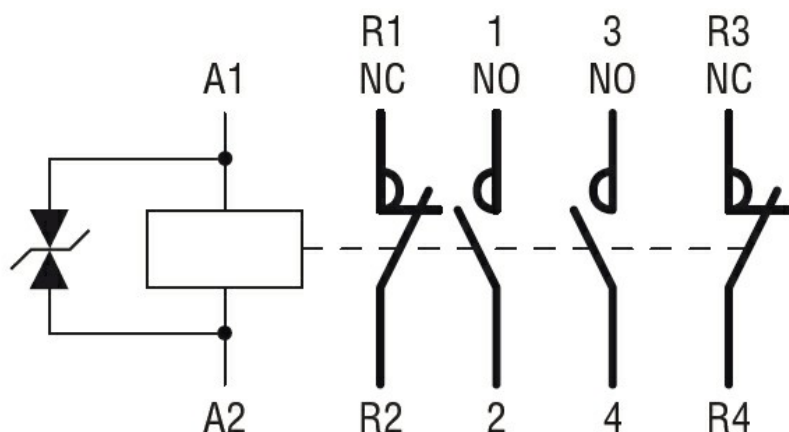

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN 60335-2-89

IEC/EN/BS 60947-1

IEC/EN/BS 60947-4-1

UL 60947-1

UL 60947-4-1

Certificates

CCC

CSA C22.2 n. 60335-2-40:22 LZGH A2L

CSA C22.2 No. 60335-2-89:21 LZGH A2L

cULus

EAC

UL 60335-2-40 LZGH A2L

UL 60335-2-89 LZGH A2L

ETIM classification

ETIM 8.0

EC000066 -
Power contactor,
AC switching