



### Contact characteristics

Number of poles	Nr.	3
Rated insulation voltage $U_i$ IEC/EN	V	1000
Rated impulse withstand voltage $U_{imp}$	kV	8
Operational frequency	min	Hz 25
	max	Hz 400
IEC Conventional free air thermal current $I_{th} \leq 40^\circ C$	A	90
Operational current $I_e$	AC-1 ( $\leq 40^\circ C$ )	A 90
	AC-1 ( $\leq 55^\circ C$ )	A 75
	AC-1 ( $\leq 70^\circ C$ )	A 65
	AC-3 ( $\leq 440V \leq 55^\circ C$ )	A 50
	AC-4 (400V)	A 28
Rated operational power AC-3 ( $T \leq 55^\circ C$ )	230V	kW 11
	400V	kW 22
	415V	kW 22
	440V	kW 22
	500V	kW 22
	690V	kW 30
	1000V	kW 22
Rated operational current AC-3 ( $T \leq 55^\circ C$ )	230V	A 50
	400V	A 50
	415V	A 50
	440V	A 50
	500V	A 44
	690V	A 39
	1000V	A 23
Rated operational power AC-1 ( $T \leq 40^\circ C$ )	230V	kW 34
	400V	kW 59
	500V	kW 74
	690V	kW 102
IEC max current $I_e$ in DC1 with $L/R \leq 1ms$ with 1 poles in series	$\leq 24V$	A 45
	48V	A 40
	75V	A 40
	110V	A 8
	220V	A -
IEC max current $I_e$ in DC1 with $L/R \leq 1ms$ with 2 poles in series	$\leq 24V$	A 60
	48V	A 60
	75V	A 60

	110V	A	50
	220V	A	7
<hr/>			
IEC max current I <sub>e</sub> in DC1 with L/R ≤ 1ms with 3 poles in series			
	≤24V	A	60
	48V	A	60
	75V	A	60
	110V	A	55
	220V	A	75
<hr/>			
IEC max current I <sub>e</sub> in DC1 with L/R ≤ 1ms with 4 poles in series			
	≤24V	A	60
	48V	A	60
	75V	A	60
	110V	A	60
	220V	A	90
<hr/>			
IEC max current I <sub>e</sub> in DC3-DC5 with L/R ≤ 15ms with 1 poles in series			
	≤24V	A	30
	48V	A	25
	75V	A	22
	110V	A	3
	220V	A	–
<hr/>			
IEC max current I <sub>e</sub> in DC3-DC5 with L/R ≤ 15ms with 2 poles in series			
	≤24V	A	35
	48V	A	35
	75V	A	30
	110V	A	25
	220V	A	5
<hr/>			
IEC max current I <sub>e</sub> in DC3-DC5 with L/R ≤ 15ms with 3 poles in series			
	≤24V	A	50
	48V	A	50
	75V	A	45
	110V	A	30
	220V	A	40
<hr/>			
IEC max current I <sub>e</sub> in DC3-DC5 with L/R ≤ 15ms with 4 poles in series			
	≤24V	A	55
	48V	A	55
	75V	A	55
	110V	A	45
	220V	A	50
<hr/>			
Short-time allowable current for 10s (IEC/EN60947-1)		A	400
<hr/>			
Protection fuse			
	gG (IEC)	A	100
	aM (IEC)	A	50
<hr/>			
Making capacity (RMS value)		A	500
<hr/>			
Breaking capacity at voltage			
	440V	A	400
	500V	A	352
	690V	A	312
<hr/>			
Resistance per pole (average value)		mΩ	0.8
<hr/>			
Power dissipation per pole (average value)			
	I <sub>th</sub>	W	6.5
	AC-3	W	2
<hr/>			
Tightening torque for terminals			
	min	Nm	4

		max	Nm	5
		min	Ibin	2.95
		max	Ibin	3.69
<hr/>				
Tightening torque for coil terminal				
		min	Nm	0.8
		max	Nm	1
		min	Ibin	0.8
		max	Ibin	0.74
<hr/>				
Max number of wires simultaneously connectable				
			Nr.	2
<hr/>				
Conductor section				
	AWG/Kcmil			
		max		2
<hr/>				
Flexible w/o lug conductor section				
		min	mm <sup>2</sup>	1.5
		max	mm <sup>2</sup>	35
<hr/>				
Flexible c/w lug conductor section				
		min	mm <sup>2</sup>	1.5
		max	mm <sup>2</sup>	35
<hr/>				
Power terminal protection according to IEC/EN 60529				
				IP20 front
<hr/>				
<b>Mechanical features</b>				
Operating position				
			normal allowable	Vertical plan ±30°
<hr/>				
Fixing				
				Screw / DIN rail 35mm
<hr/>				
Weight				
			g	1020
<hr/>				
<b>Operations</b>				
Mechanical life				
			cycles	15000000
Electrical life				
			cycles	1400000
<hr/>				
<b>Safety related data</b>				
Performance level B10d according to EN/ISO 13489-1				
		rated load	cycles	1400000
		mechanical load	cycles	15000000
<hr/>				
EMC compatibility				
				yes
<hr/>				
<b>AC coil operating</b>				
Rated AC voltage at 50/60Hz				
			V	24
<hr/>				
AC operating voltage				
	of 50/60Hz coil powered at 50Hz			
	pick-up	min	%Us	80
		max	%Us	110
	drop-out	min	%Us	20
		max	%Us	55
<hr/>				
	of 50/60Hz coil powered at 60Hz			
	pick-up	min	%Us	85
		max	%Us	110
	drop-out	min	%Us	40
		max	%Us	55
<hr/>				
AC average coil consumption at 20°C				
	of 50/60Hz coil powered at 50Hz			
		in-rush	VA	210

	holding	VA	15	
of 50/60Hz coil powered at 60Hz				
	in-rush	VA	195	
	holding	VA	13	
of 60Hz coil powered at 60Hz				
	in-rush	VA	210	
	holding	VA	15	
Dissipation at holding $\leq 20^{\circ}\text{C}$ 50Hz			W	5
<b>Max cycles frequency</b>				
Mechanical operation			cycles/h	3600
<b>Operating times</b>				
Average time for $U_s$ control				
in AC				
Closing NO				
	min	ms	12	
	max	ms	28	
Opening NO				
	min	ms	8	
	max	ms	22	
in DC				
Closing NO				
	min	ms	40	
	max	ms	85	
Opening NO				
	min	ms	20	
	max	ms	55	
<b>UL technical data</b>				
Rated operational voltage AC (UL)			V	600
Full-load current (FLA) for three-phase AC motor				
	at 480V	A	52	
	at 600V	A	41	
Yielded mechanical performance				
for single-phase AC motor				
	110/120V	HP	5	
	230V	HP	10	
for three-phase AC motor				
	200/208V	HP	15	
	220/240V	HP	20	
	460/480V	HP	40	
	575/600V	HP	40	
General USE				
Contactor				
	AC current	A	90	
Short-circuit protection fuse, 600V				
High fault				
	Short circuit current	kA	100	
	Fuse rating	A	150	
	Fuse class		J	
Standard fault				
	Short circuit current	kA	5	
	Fuse rating	A	150	
	Fuse class		RK5	

**Ambient conditions**

Temperature

Operating temperature

min	°C	-50
max	°C	70

Storage temperature

min	°C	-60
max	°C	80

Max altitude


m	3000
---	------

**Resistance & Protection**


Pollution degree

3

**Dimensions**

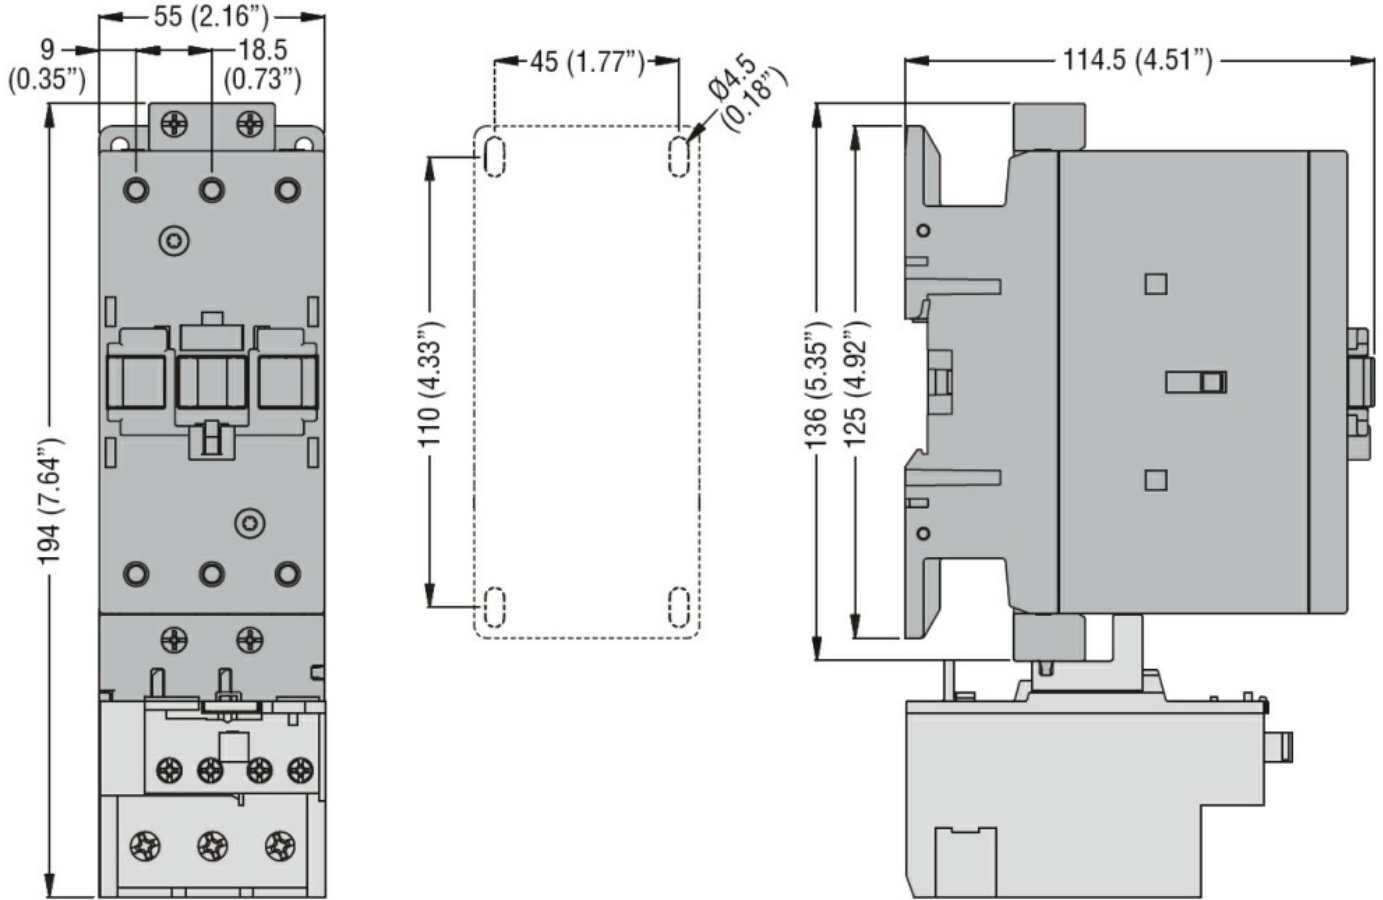

**Wiring diagrams**

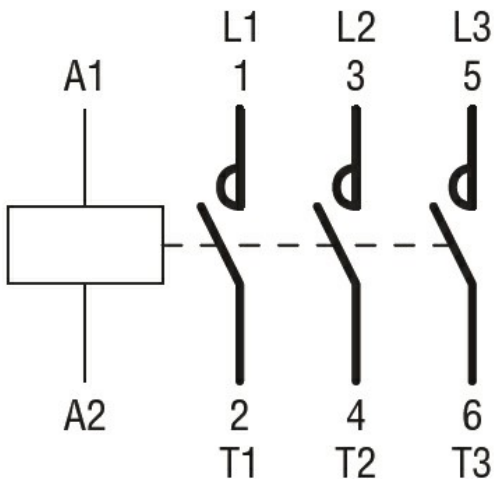

### Certifications and compliance

#### Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN 60335-2-89

IEC/EN/BS 60947-1

IEC/EN/BS 60947-4-1

UL 60947-1

UL 60947-4-1

#### Certificates

CCC

CSA C22.2 n. 60335-2-40:22 LZGH A2L

CSA C22.2 No. 60335-2-89:21 LZGH A2L

cULus

UL 60335-2-40 LZGH A2L

UL 60335-2-89 LZGH A2L

### ETIM classification

ETIM 8.0

EC000066 -  
Power contactor,  
AC switching