



Contact characteristics

Number of poles	Nr.	4	
Rated insulation voltage U_i IEC/EN	V	1000	
Rated impulse withstand voltage U_{imp}	kV	8	
Operational frequency	min	Hz	25
	max	Hz	400
IEC Conventional free air thermal current $I_{th} \leq 40^{\circ}\text{C}$	A	100	
Operational current I_e	AC-1 ($\leq 40^{\circ}\text{C}$)	A	100
	AC-1 ($\leq 55^{\circ}\text{C}$)	A	80
	AC-1 ($\leq 70^{\circ}\text{C}$)	A	70
	AC-3 ($\leq 440\text{V} \leq 55^{\circ}\text{C}$)	A	65
	AC-4 (400V)	A	31
Rated operational current AC-3 ($T \leq 55^{\circ}\text{C}$)	230V	A	65
	400V	A	65
	415V	A	65
	440V	A	65
	500V	A	53
	690V	A	47
	1000V	A	25
Rated operational power AC-1 ($T \leq 40^{\circ}\text{C}$)	230V	kW	38
	400V	kW	65
	500V	kW	82
	690V	kW	114
IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 1 poles in series	$\leq 24\text{V}$	A	50
	48V	A	50
	75V	A	50
	110V	A	8
	220V	A	–
IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 2 poles in series	$\leq 24\text{V}$	A	70
	48V	A	70
	75V	A	70
	110V	A	60
	220V	A	9
IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 3 poles in series	$\leq 24\text{V}$	A	70
	48V	A	70
	75V	A	70
	110V	A	60
	220V	A	90

IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 4 poles in series

$\leq 24\text{V}$	A	70
48V	A	70
75V	A	70
110V	A	70
220V	A	110

IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 1 poles in series

$\leq 24\text{V}$	A	35
48V	A	25
75V	A	25
110V	A	3
220V	A	—

IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 2 poles in series

$\leq 24\text{V}$	A	45
48V	A	40
75V	A	40
110V	A	30
220V	A	5

IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 3 poles in series

$\leq 24\text{V}$	A	55
48V	A	50
75V	A	50
110V	A	35
220V	A	52

IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 4 poles in series

$\leq 24\text{V}$	A	60
48V	A	60
75V	A	60
110V	A	50
220V	A	65

Short-time allowable current for 10s (IEC/EN60947-1)

A 640

Protection fuse

gG (IEC)	A	125
aM (IEC)	A	80

Making capacity (RMS value)

A 650

Breaking capacity at voltage

440V	A	520
500V	A	425
690V	A	376

Resistance per pole (average value)

mΩ 0.8

Power dissipation per pole (average value)

Ith	W	8
AC-3	W	3.4

Tightening torque for terminals

min	Nm	4
max	Nm	5
min	Ibin	2.95
max	Ibin	3.69

Tightening torque for coil terminal

min	Nm	0.8
max	Nm	1
min	Ibin	0.8
max	Ibin	0.74

Max number of wires simultaneously connectable			Nr.	2
Conductor section				
AWG/Kcmil		max		2
Flexible w/o lug conductor section				
		min	mm ²	1.5
		max	mm ²	35
Flexible c/w lug conductor section				
		min	mm ²	1.5
		max	mm ²	35
Power terminal protection according to IEC/EN 60529				IP20 front
Mechanical features				
Operating position			normal allowable	Vertical plan ±30°
Fixing				Screw / DIN rail 35mm
Weight			g	1280
Operations				
Mechanical life			cycles	15000000
Electrical life			cycles	1400000
Safety related data				
Performance level B10d according to EN/ISO 13489-1				
			rated load mechanical load	cycles 1400000 cycles 15000000
EMC compatibility				yes
AC coil operating				
Rated AC voltage at 50/60Hz, 60Hz				
			min	V 100
			max	V 250
AC operating voltage				
of 50/60Hz coil powered at 50Hz pick-up			min	%Us 80 Us min
			max	%Us 110 Us max
drop-out			max	%Us ≤70 Us min
of 50/60Hz coil powered at 60Hz pick-up			min	%Us 80 Us min
			max	%Us 110 Us max
drop-out			max	%Us ≤70 Us min
AC average coil consumption at 20°C				
of 50/60Hz coil powered at 50Hz			in-rush holding	VA 35...120 VA 1.5...3.7
of 50/60Hz coil powered at 60Hz			in-rush holding	VA 35...120 VA 1.5...3.7
Dissipation at holding ≤20°C 50Hz				W 1...2.5
DC coil operating				
DC rated control voltage				

		min	V	100
		max	V	250
max			V	250
DC operating voltage				
pick-up		min	%Us	80 Us min
		max	%Us	110 Us max
drop-out				
		max	%Us	≤70 Us min
Average coil consumption ≤20°C				
		in-rush	W	23...68
		holding	W	1.2...1,9
Max cycles frequency				
Mechanical operation			cycles/h	1500
Operating times				
Average time for Us control				
in AC				
		Closing NO		
		min	ms	12
		max	ms	28
		Opening NO		
		min	ms	8
		max	ms	22
in DC				
		Closing NO		
		min	ms	40
		max	ms	85
		Opening NO		
		min	ms	20
		max	ms	55
UL technical data				
Rated operational voltage AC (UL)			V	600
Full-load current (FLA) for three-phase AC motor				
		at 480V	A	65
		at 600V	A	62
Yielded mechanical performance				
for three-phase AC motor				
		200/208V	HP	20
		220/240V	HP	25
		460/480V	HP	50
		575/600V	HP	60
General USE				
Contactor				
		AC current	A	100
Short-circuit protection fuse, 600V				
High fault				
		Short circuit current	kA	100
		Fuse rating	A	200
		Fuse class		J
Standard fault				
		Short circuit current	kA	10
		Fuse rating	A	200
		Fuse class		RK5
Ambient conditions				

Temperature

Operating temperature

min	°C	-40
max	°C	70

Storage temperature


min	°C	-50
max	°C	80

Max altitude	m	3000
--------------	---	------


Resistance & Protection

Pollution degree	3
------------------	---

Dimensions

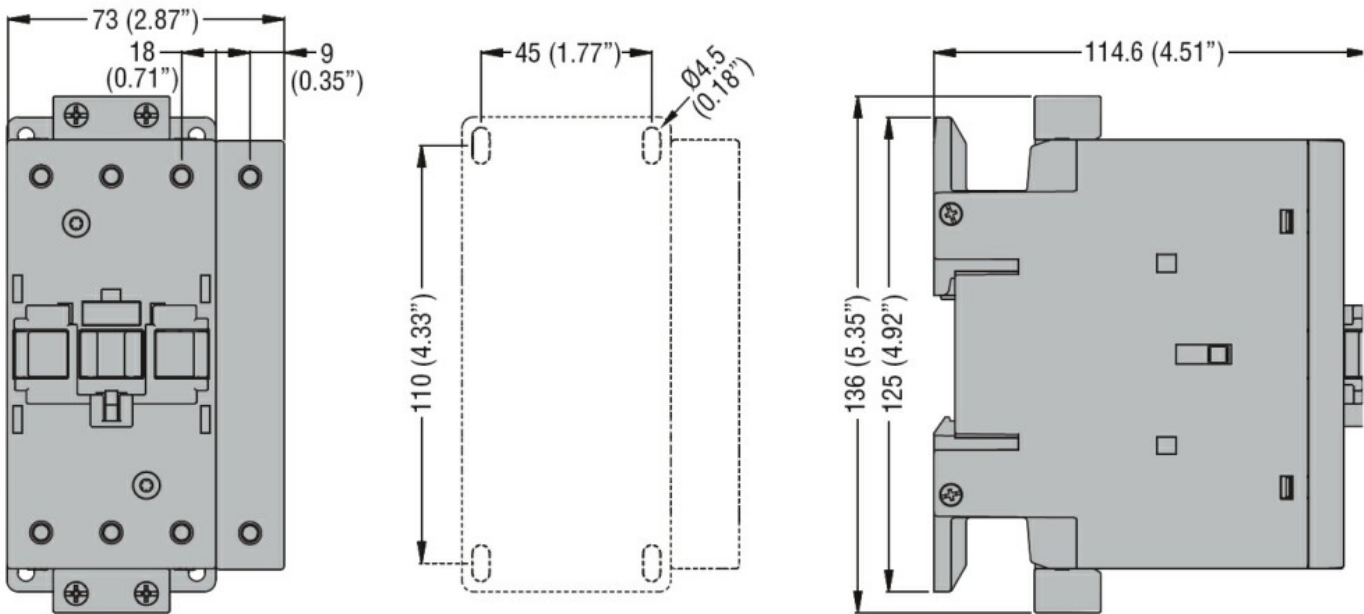

Wiring diagrams

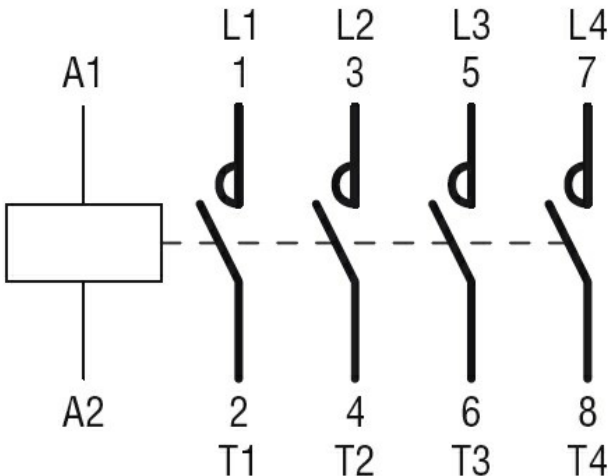

Certifications and compliance

Compliance

- CSA C22.2 n° 60947-1
- CSA C22.2 n° 60947-4-1
- IEC/EN 60335-2-89
- IEC/EN/BS 60947-1
- IEC/EN/BS 60947-4-1
- UL 60947-1

UL 60947-4-1

Certificates

CCC

CSA C22.2 n. 60335-2-40:22 LZGH A2L

CSA C22.2 No. 60335-2-89:21 LZGH A2L

cULus

UL 60335-2-40 LZGH A2L

UL 60335-2-89 LZGH A2L

ETIM classification

ETIM 8.0

EC000066 -
Power contactor,
AC switching