



Electrical features

Maximum operating current ($\leq 440V$) A 9

Contact characteristics

Operational current Ie AC-3 ($\leq 440V \leq 55^\circ C$) A 9

Rated operational power AC-3 ($T \leq 55^\circ C$)			
	230V	kW	2.2
400V	kW	4.2	
415V	kW	4.5	
440V	kW	4.8	
500V	kW	5.5	
690V	kW	7.2	

Built-in auxiliary contacts NO 0
NC 1

UL technical data

Maximum UL/CSA horsepower ratings single-phase 110V-120V HP 0.75
220V-240V HP 2


Maximum UL/CSA horsepower ratings three-phase, 3-pole 200V-208V HP 3
220V-240V HP 3
440V-480V HP 5
550V-600V HP 7.5

Mechanical features


Terminals type Clamp screw

Weight g 760

Dimensions

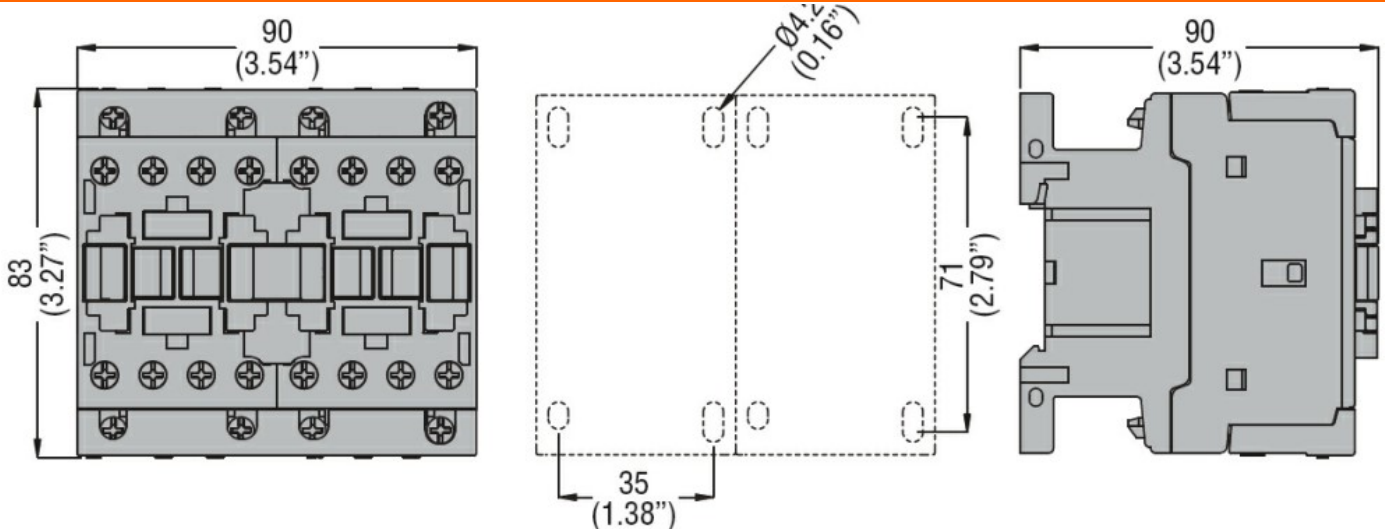

Wiring diagrams

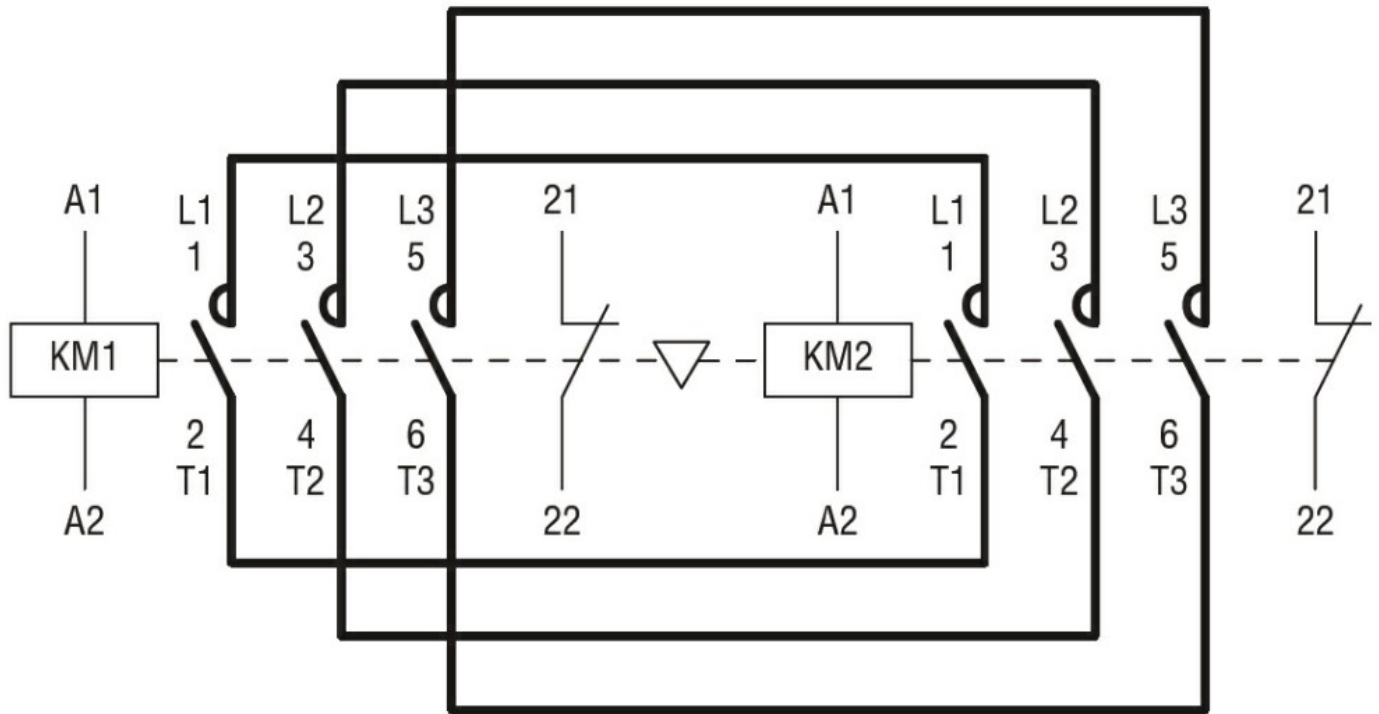

Certifications and compliance

Compliance

IEC/EN 60947-1
IEC/EN 60947-4-1
UL508 CSA C22.2 n° 14

Certificates

cULus

ETIM classification

ETIM 8.0

EC001037 -
Motor
starter/Motor
starter
combination