



**Electrical features**

Maximum operating current ( $\leq 440V$ ) A 25

**Contact characteristics**

Operational current Ie AC-3 ( $\leq 440V \leq 55^\circ C$ ) A 25

Rated operational power AC-3 ( $T \leq 55^\circ C$ )	AC-3 ( $\leq 440V \leq 55^\circ C$ )		
	V	kW	A
	230V	kW	7
	400V	kW	12.5
	415V	kW	13.4
	440V	kW	13.4
	500V	kW	15
	690V	kW	11

Built-in auxiliary contacts NO 0  
NC 1

**UL technical data**

Maximum UL/CSA horsepower ratings single-phase 110V-120V HP 2  
220V-240V HP 3


Maximum UL/CSA horsepower ratings three-phase, 3-pole 200V-208V HP 7.5  
220V-240V HP 7.5  
440V-480V HP 15  
550V-600V HP 15

**Mechanical features**


Terminals type Clamp screw

Weight g 760

**Dimensions**

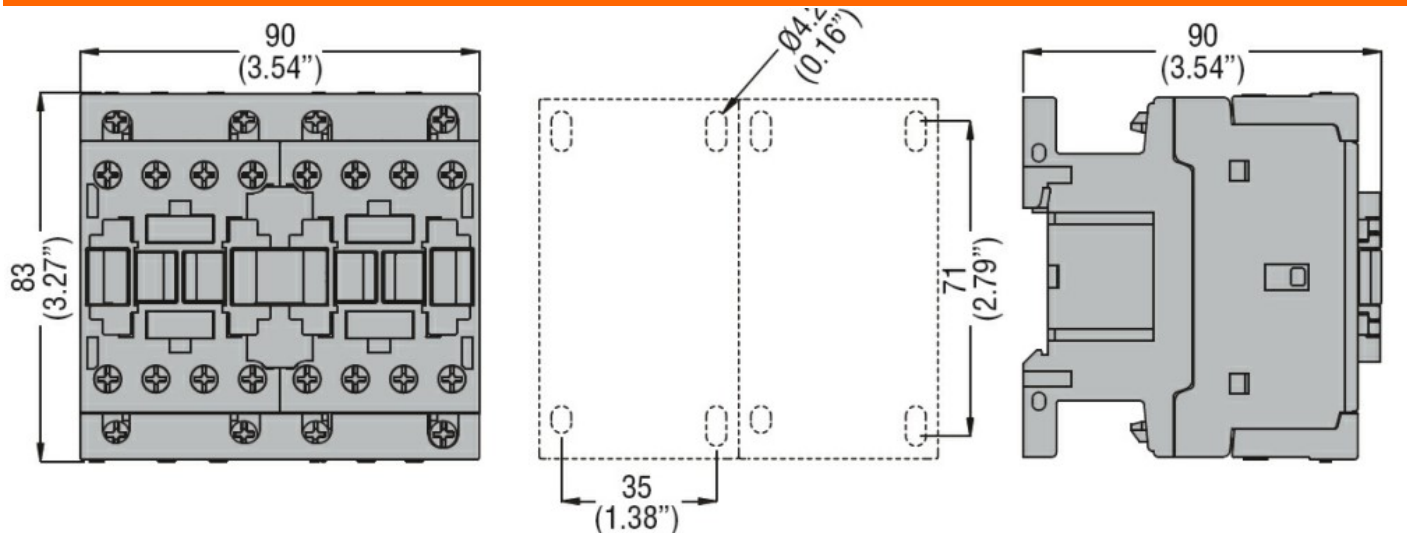

**Wiring diagrams**

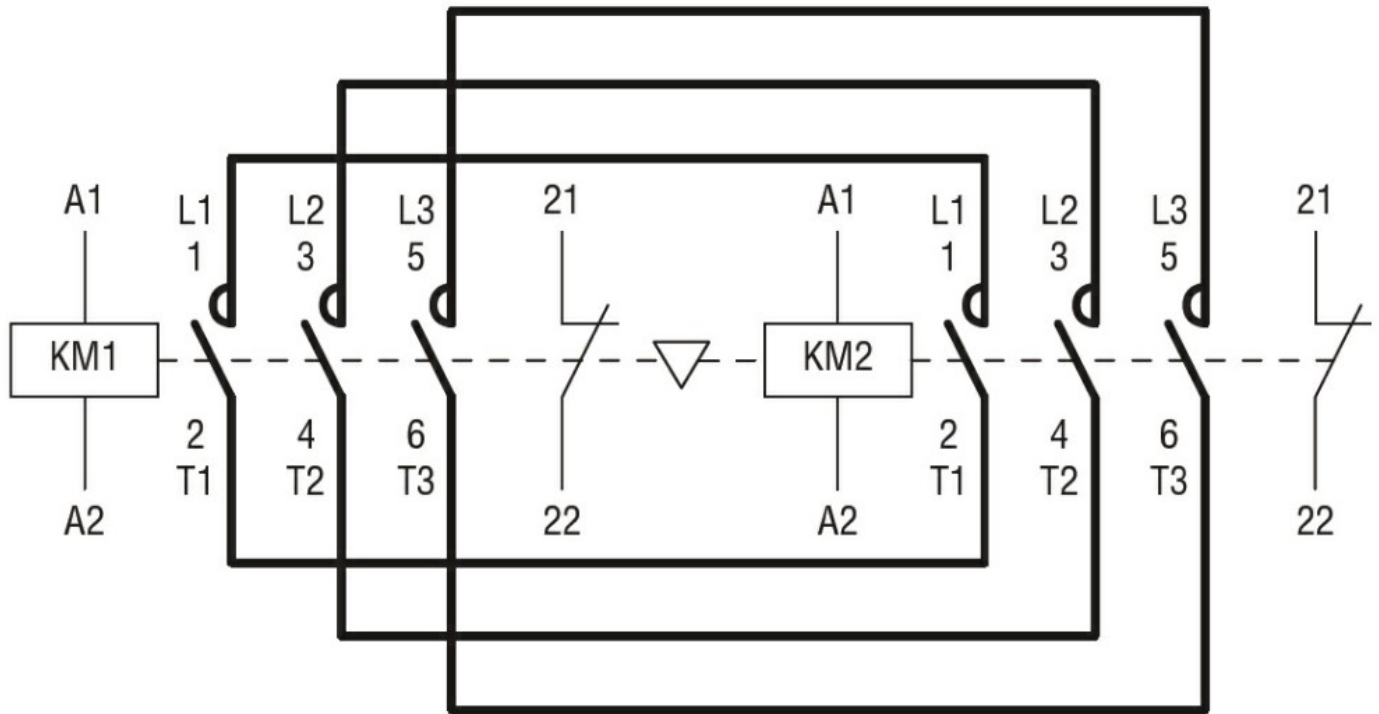

**Certifications and compliance**

Compliance

IEC/EN 60947-1  
IEC/EN 60947-4-1  
UL508 CSA C22.2 n° 14

Certificates

cULus

**ETIM classification**

ETIM 8.0

EC001037 -  
Motor  
starter/Motor  
starter  
combination