



**Electrical features**

Maximum operating current ( $\leq 440V$ ) A 25

**Contact characteristics**

Operational current Ie AC-3 ( $\leq 440V \leq 55^\circ C$ ) A 25

Rated operational power AC-3 ( $T \leq 55^\circ C$ )	Voltage	Power (kW)	Current (A)
	230V	7	25
	400V	12.5	25
	415V	13.4	25
	440V	13.4	25
	500V	15	25
	690V	11	25

**Built-in auxiliary contacts**

NO 0  
NC 1

**UL technical data**

Maximum UL/CSA horsepower ratings single-phase	Voltage	HP	Current (A)
	110V-120V	2	25
	220V-240V	3	25


Maximum UL/CSA horsepower ratings three-phase, 3-pole	Voltage	HP	Current (A)
	200V-208V	7.5	25
	220V-240V	7.5	25
	440V-480V	15	25
	550V-600V	15	25

**Mechanical features**


Terminals type Clamp screw

Weight g 760

**Dimensions**

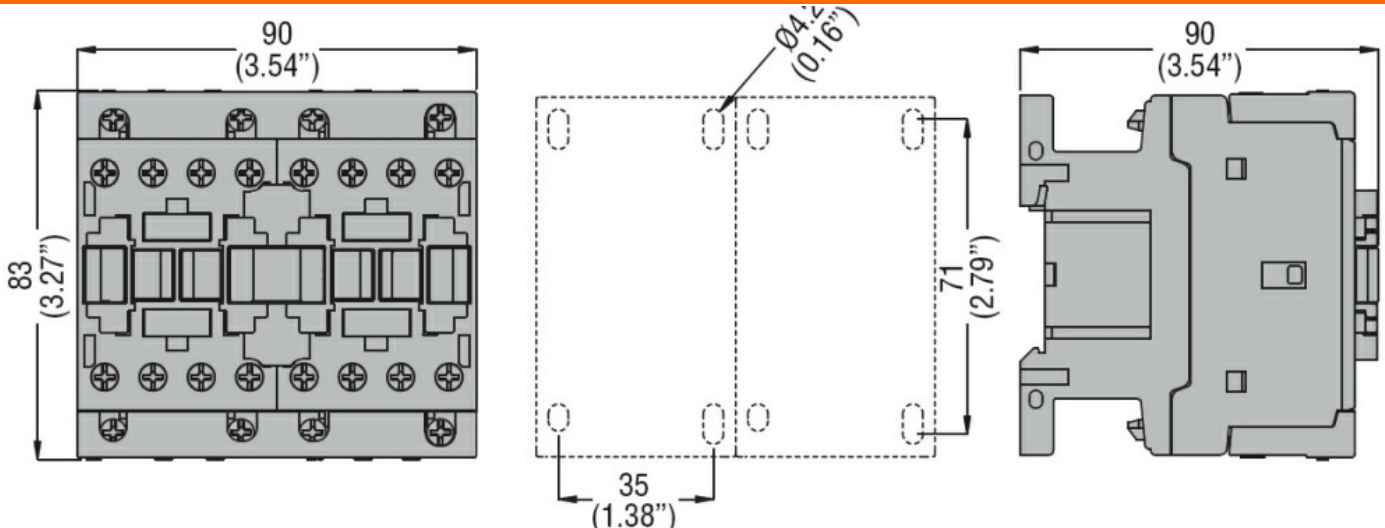

**Wiring diagrams**

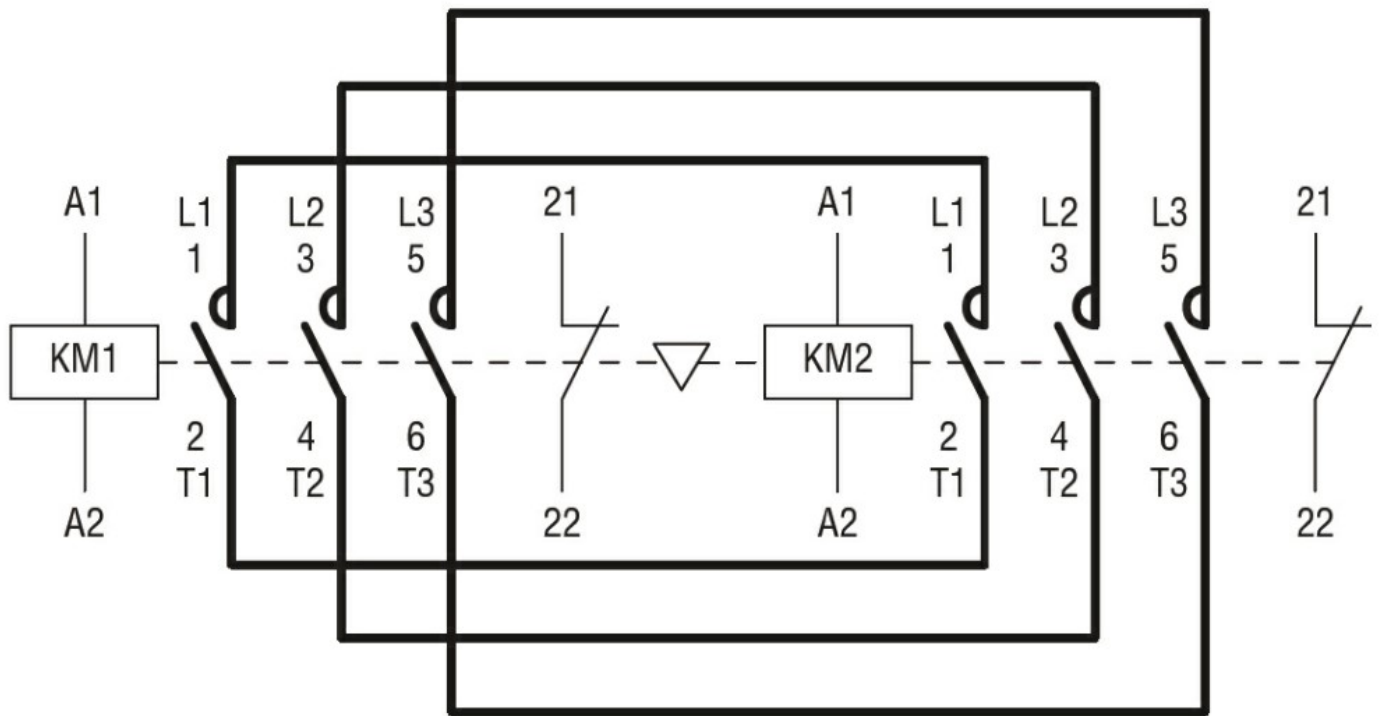

**Certifications and compliance**

Compliance

IEC/EN 60947-1  
IEC/EN 60947-4-1  
UL508 CSA C22.2 n° 14

Certificates

cULus

**ETIM classification**

ETIM 8.0

EC001037 -  
Motor  
starter/Motor  
starter  
combination