



Electrical features

Maximum operating current ($\leq 440V$) A 25

Contact characteristics

Operational current Ie AC-3 ($\leq 440V \leq 55^\circ C$) A 25

Rated operational power AC-3 ($T \leq 55^\circ C$)	AC-3 ($\leq 440V \leq 55^\circ C$)		
	V	kW	A
	230V	kW	7
	400V	kW	12.5
	415V	kW	13.4
	440V	kW	13.4
	500V	kW	15
	690V	kW	11

Built-in auxiliary contacts NO 0
NC 1

UL technical data

Maximum UL/CSA horsepower ratings single-phase 110V-120V HP 2
220V-240V HP 3


Maximum UL/CSA horsepower ratings three-phase, 3-pole 200V-208V HP 7.5
220V-240V HP 7.5
440V-480V HP 15
550V-600V HP 15

Mechanical features


Terminals type Clamp screw

Weight g 760

Dimensions

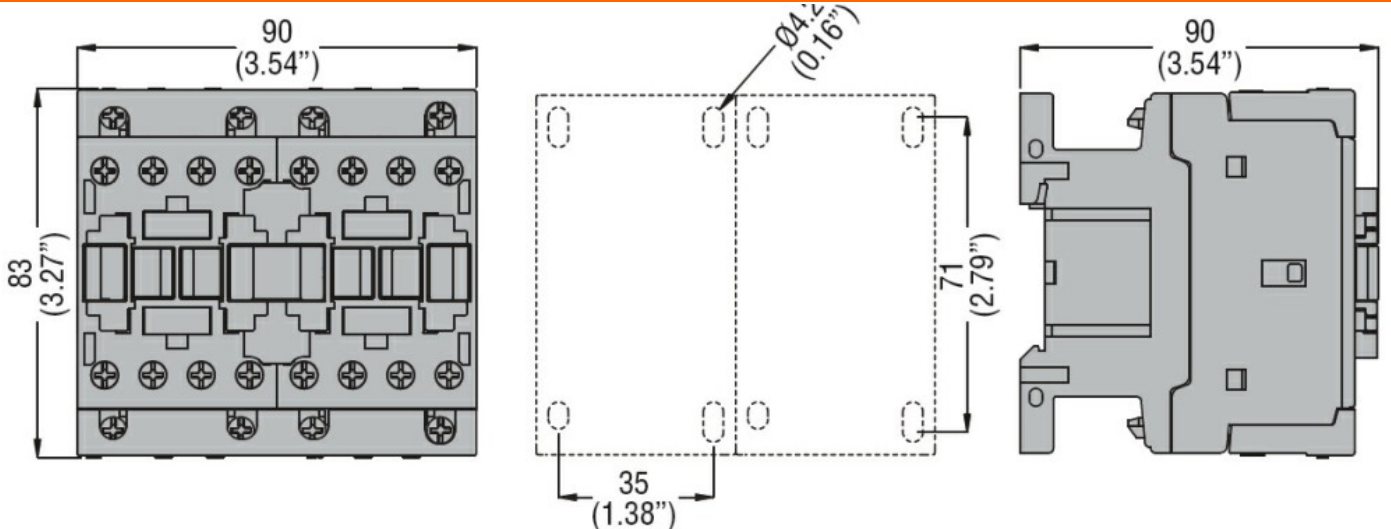

Wiring diagrams

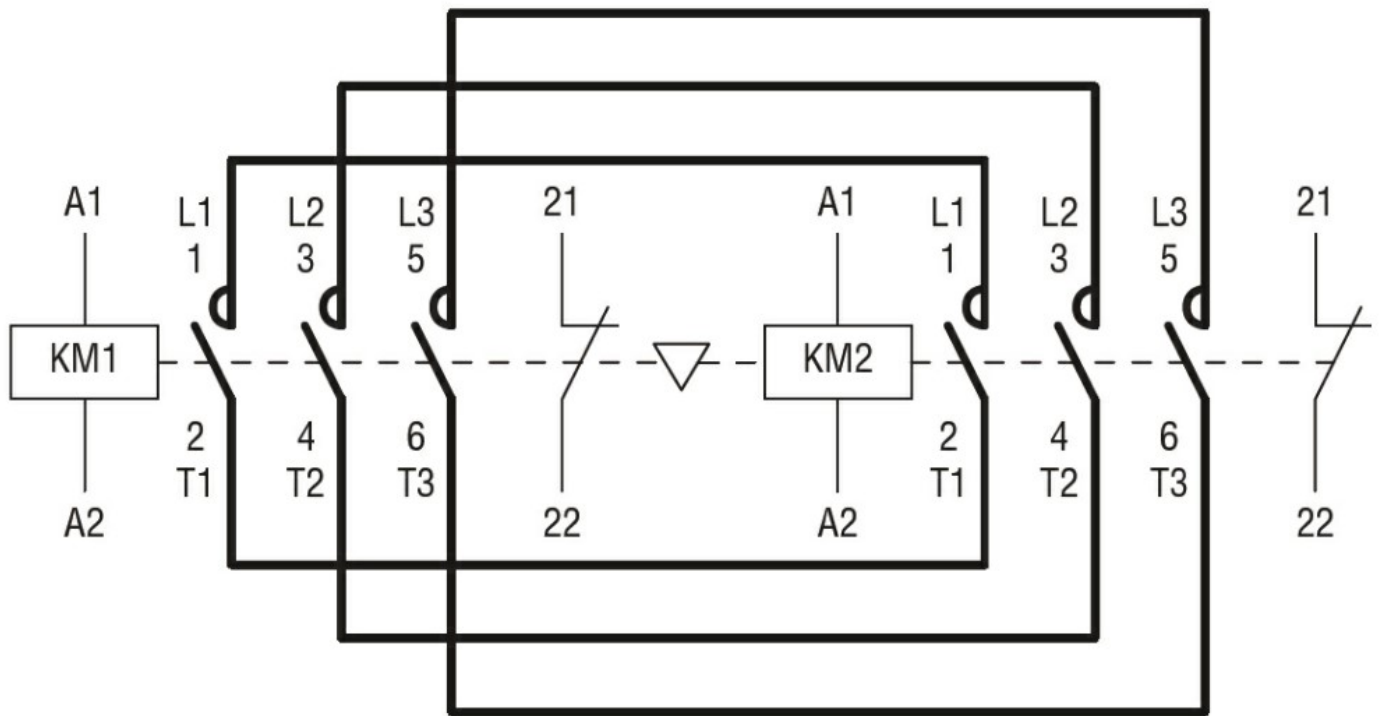

Certifications and compliance

Compliance

IEC/EN 60947-1
IEC/EN 60947-4-1
UL508 CSA C22.2 n° 14

Certificates

cULus

ETIM classification

ETIM 8.0

EC001037 -
Motor
starter/Motor
starter
combination