



Electrical features

Maximum operating current ($\leq 440V$) A 32

Contact characteristics


Operational current Ie

AC-1 ($\leq 40^\circ C$)	A	32
AC-1 ($\leq 55^\circ C$)	A	26
AC-1 ($\leq 60^\circ C$)	A	23


Mechanical features

Terminals type	Screw
Fixing	Side mount
Weight	g 786

Dimensions

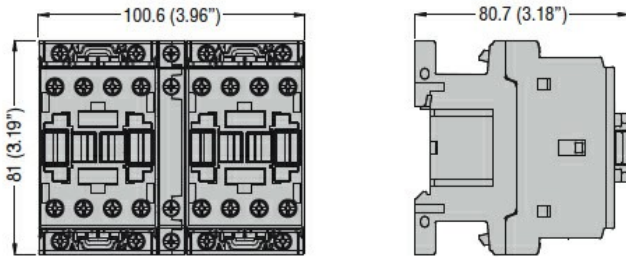

Wiring diagrams

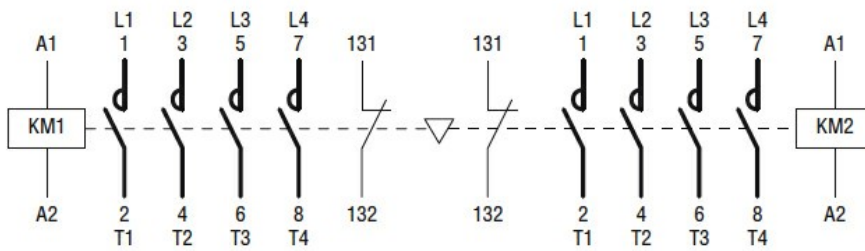

ETIM classification

ETIM 8.0

EC000010 -
Combination of
contactors