




Mechanical features				
Weight	g		2	
AC coil operating				
Rated AC voltage at 50/60Hz	V		48	
AC operating voltage				
of 50/60Hz coil powered at 50Hz				
drop-out	min	%Us	20	
	max	%Us	55	
of 50/60Hz coil powered at 60Hz				
pick-up	min	%Us	85	
	max	%Us	110	
drop-out	min	%Us	20	
	max	%Us	55	
AC average coil consumption at 20°C				
of 50/60Hz coil powered at 50Hz				
	in-rush	VA	75	
	holding	VA	9	
of 50/60Hz coil powered at 60Hz				
	in-rush	VA	70	
	holding	VA	6.5	
of 60Hz coil powered at 60Hz				
	in-rush	VA	75	
	holding	VA	9	
Dissipation at holding ≤20°C 50Hz	W		2.5	
UL technical data				
Rated operational voltage AC (UL)	V		600	
Dimensions				

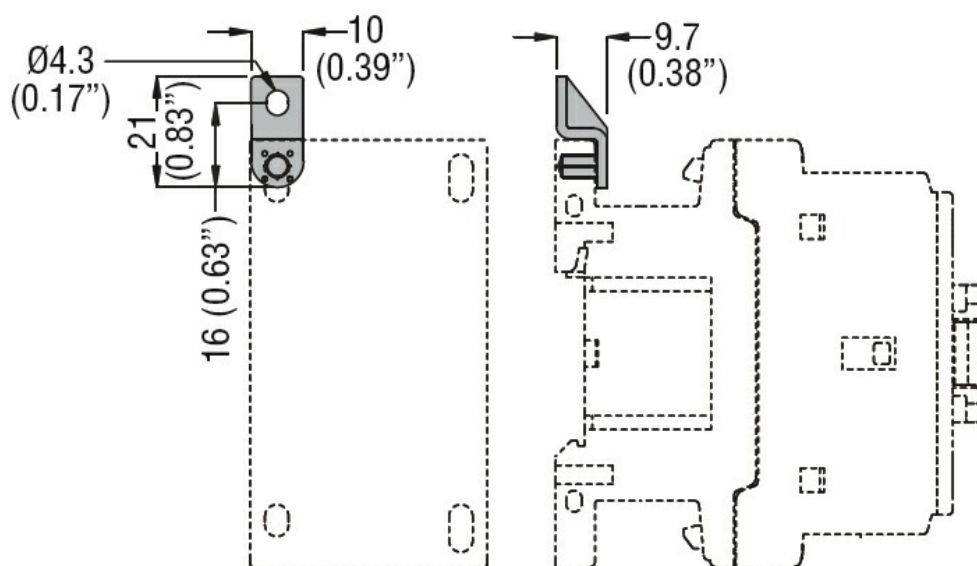

Certifications and compliance

Certificates

/

ETIM classification

ETIM 8.0

EC002498 -
Accessories/spare
parts for low-
voltage switch
technology