



Electrical features

IEC Conventional free air thermal current $I_{th} \leq 40^\circ\text{C}$	A	32
Operational current AC1 and AC-7a $\leq 400\text{V}$	A	32
Operational current AC-3 and AC-7b $\leq 400\text{V}$	A	8.5
Rated insulation voltage U_i IEC/EN	V	440
Rated impulse withstand voltage U_{imp}	kV	4
Minimum switching capacity		$\geq 17\text{V} \geq 50\text{mA}$
Power dissipation per pole (average value) I_{th}	W	2.5

Control circuit

Auxiliary rated supply voltage U_s	220VAC/VDC		
Auxiliary contacts			
	NO	Nr.	3
	NC	Nr.	1
Average coil consumption $\leq 20^\circ\text{C}$			
	in-rush	W	3
	holding	W	3

Operating voltage

pick-up	min	% U_s	85
	max	% U_s	110
drop-out	min	% U_s	20
	max	% U_s	75

Operating times

Average time				
Closing NO	min	ms	15	
	max	ms	45	
Opening NO	min	ms	20	
	max	ms	70	

Operations

Mechanical life	cycles	3000000
Electrical life AC-3	cycles	500000
Electrical life AC1	cycles	150000

Ambient conditions

Operating temperature	min	$^\circ\text{C}$	-15
	max	$^\circ\text{C}$	55
Storage temperature	min	$^\circ\text{C}$	-30
	max	$^\circ\text{C}$	80
Max altitude	m	2000	

Mechanical features

Fixing	DIN rail 35mm
--------	---------------

Tightening torque for coil terminal

max	Nm	0.6
max	Ibin	0.6

Tightening torque for terminals

max	Nm	1.2
max	Ibin	0.9

Conductor section

Coil terminal

min	mm ²	1
max	mm ²	2.5

Power terminal

min	mm ²	1
max	mm ²	10

Terminals tool

PZ2

Weight

g 260

Resistance & Protection


Frontal IP degree

IP20


Pollution degree

3

Dimensions

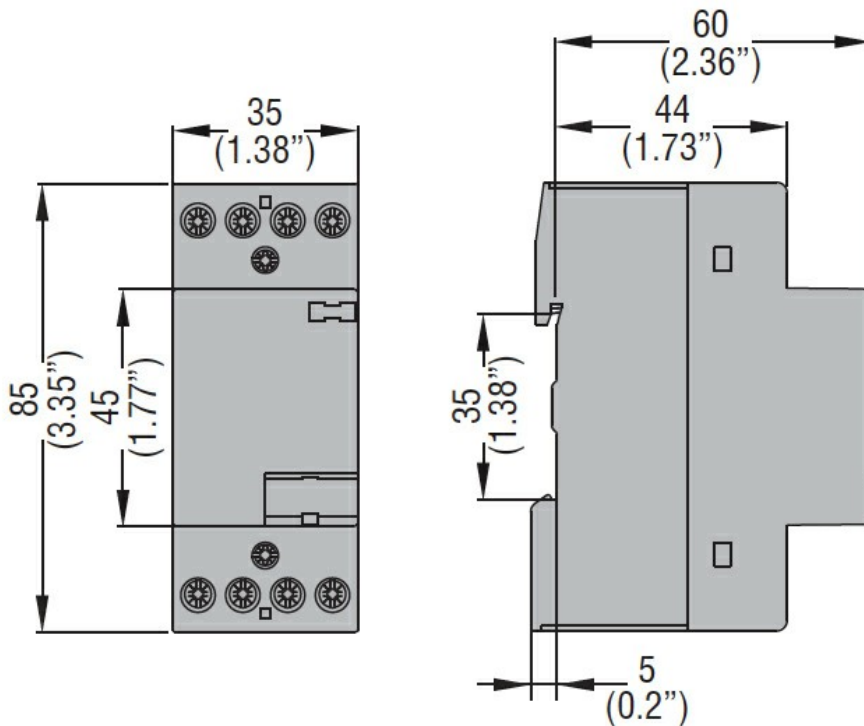

Wiring diagrams



Certifications and compliance

Compliance

IEC/EN 60947-1

IEC/EN 60947-4-1

IEC/EN 60947-5-1

IEC/EN 61095

Certificates

EAC

ETIM classification

ETIM 8.0

EC000066 -
Power contactor,
AC switching