


Current inputs				
Primary current I _{pn} (/5)	A		200	
Operational frequency		min	Hz	50
		max	Hz	60
Secondary output current	A		5	
Overload withstand I _{pn}	%		120	
Burden		cl. 1	VA	5
Insulations				
Rated insulation voltage U _i IEC/EN	V		720	
IEC rated short-time thermal current I _{th}	I _{th} for s		40...60	
IEC rated dynamic current I _{dyn}	I _{th} for s		2.5	
Insulation dry type			Class E	
Mechanical features				
Terminals type			Faston	
Fixing			DIN rail or by Screw	
Weight	g		260	
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-25
		max	°C	+50
	Storage temperature			
		min	°C	-40
		max	°C	+80
Relative humidity			%	90
Protection degree				IP30
Dimensions				

DM3T0200

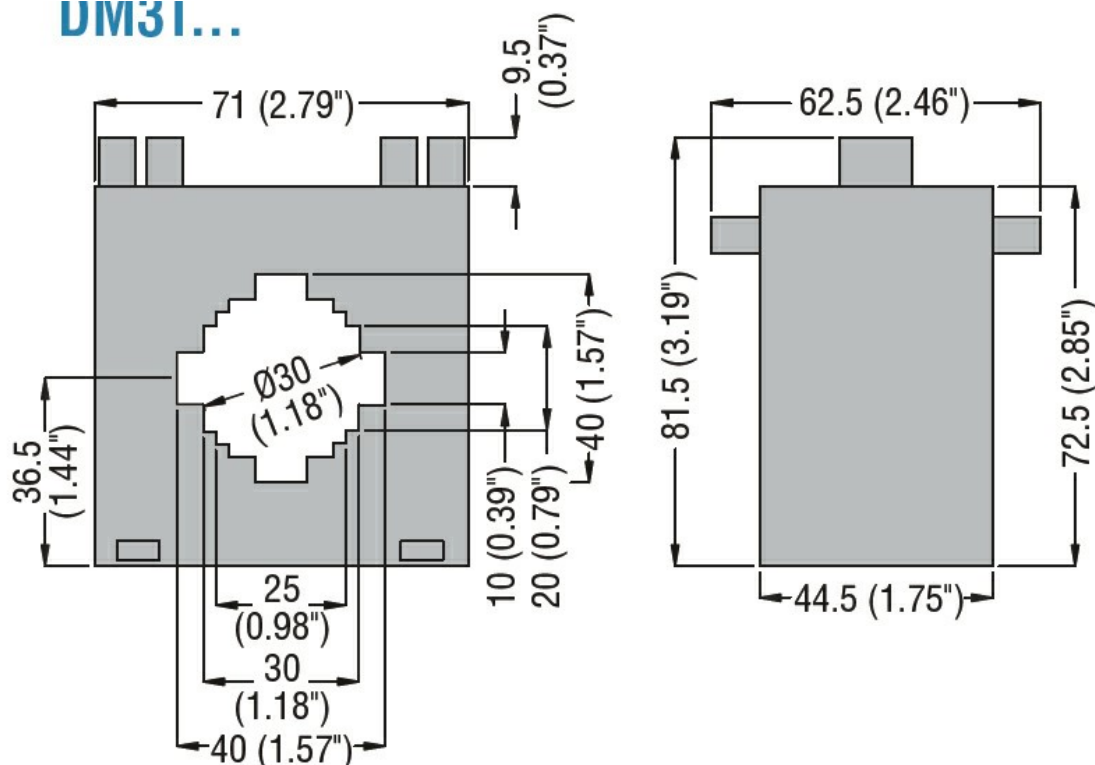

Certifications and compliance

Certifications

IEC/EN/BS 61869-1

IEC/EN/BS 61869-2

Compliance

EAC

ETIM classification

EC000066 - Power contactor, AC switching