


EXPANSION MODULE EXP SERIES FOR FLUSH-MOUNT PRODUCTS, 2 OPTO-ISOLATED DIGITAL INPUTS AND 2 RELAY OUTPUTS, RATED 5A 250VAC


				THE WINDS
Product designation Product type designation	on			Expansion modules for flush-mount products - input/output EXP1008
General characteristics				
Description				2 opto-isolated digital inputs and 2 relay outputs rated 5A 250VAC
Functions				Inputs and outputs
Rated power supply vo	Itage			5A 250VAC
Compatibility with LOVA	-			
	Digital multimeters			
		DMG600/601/611		Yes
	Digital power analyzers			
		DMG7000		Yes
		DMG7500		Yes
		DMG8000		Yes
	Automatic power factor controllers	DMG9000		Yes
	Automatic power factor controllers	DCRG8		Yes
	Automatic transfer switch contrllers	DONGO		103
		ATL610		Yes
		ATL800/900		Yes
	Fire pump controllers			
		FFLRA400		Yes
	Engine and generator controllers			
		RGK750/RGK8/RGK9		Yes
Input and Output				
Digital inputs		Number of digital input	Nr.	2
Digital outputs		Number of digital output	Nr.	2
Mechanical features				50
Weight			g	58
Dimensions				



ENERGY AND AUTOMATION

EXPANSION MODULE EXP SERIES FOR FLUSH-MOUNT PRODUCTS, 2 OPTO-ISOLATED DIGITAL INPUTS AND 2 RELAY OUTPUTS, RATED 5A 250VAC




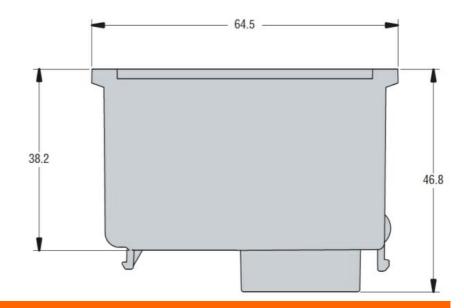


Wiring diagrams


Disposizione morsetti degli ingressi digitali Terminal arrangement of digital inputs

Ingressi da contatto non tensionato Free voltage contact inputs










OUT 1 OUT 2





EXP1008

EXPANSION MODULE EXP SERIES FOR FLUSH-MOUNT PRODUCTS, 2 OPTO-ISOLATED DIGITAL INPUTS AND 2 RELAY OUTPUTS, RATED 5A 250VAC

	CSA C22.2 n° 14
	IEC/EN 61000-6-2
	IEC/EN 61000-6-3
	IEC/EN 61010-1
	UL508
Certificates	
	cULus
	EAC

ETIM classification

ETIM 8.0

EC002498 -Accessories/spare parts for lowvoltage switch technology