



Auxiliary supply U_s

Auxiliary rated supply voltage DC	VDC	24
Auxiliary operating voltage range DC		
	min VDC	20.4
	Max VDC	27.6
Power dissipation Max	W	5.5


Mechanical features

Housing type	Polyamide		
Terminals type	Screw		
Conductor cross section			
	min	mm ²	0.2
	Max	mm ²	2.5
	min	AWG	12
	Max	AWG	24
Tightening torque (Max)			
	Nm		0.5
	lbin		4.5
Weight	g		90

Ambient conditions

Temperature			
Operating temperature			
	min	°C	-20
	max	°C	+60
Storage temperature			
	min	°C	-30
	max	°C	+80
Relative humidity		%	<80
Maximum Pollution degree			2
Overvoltage category			3
Protection degree			IP20

Dimensions

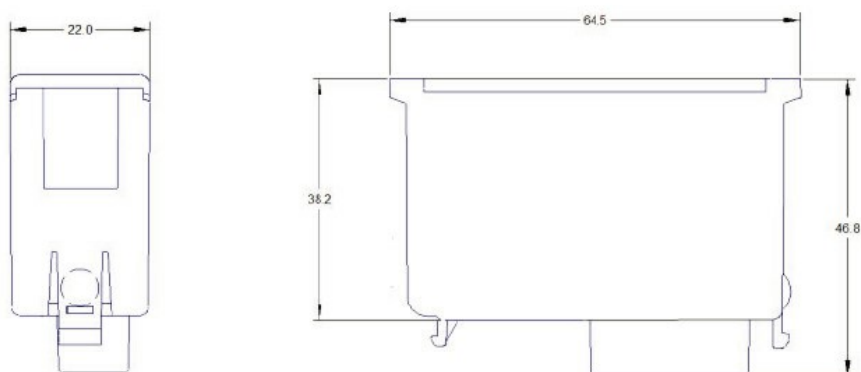

Certifications and compliance

Compliance

IEC/EN/BS 61000-6-2

IEC/EN/BS 61000-6-4

IEC/EN/BS 61010-1

Certificates

CE

cETLus

EAC

UKCA